



CONTENTS

	Address No.
● Instruction for use of parts catalogue.....	B 2
I. How to order parts	B 2
II. How to read this parts catalogue.....	B 2
III. How to use the flat rate time (F.R.T.).....	B 5
● Model photograph.....	B 7
● Part No. index	B 8
● Block index-Engine group	C 1
● Block index-Frame group	F 1

3. Abbreviations

The following abbreviations are used in this parts catalogue.

ASSY. Assembly	MPH Miles per hour
COMP. Complete	L (100L) Link (100Links)
R. Right	A.C. Alternating current
L. Left	D.C. Direct current
STD. Standard	IN. Inlet
MM Millimeter	EX. Exhaust
G Gram	FR. Front
T (22T) Tooth (22Teeth)	RR. Rear
A Ampere	HEX. Hexagonal
V Volt	A.M. Attaching mark
W Watt	T.M. Transcript mark
KPH Kilometers per hour	C.D.I. Capacitive discharge ignition
L.E.D. Light emitted diode	

4. Dimensions

All dimensions are given in millimeters (mm) except in the case of steel balls, tires and tire tubes.

Parts	Example	Interpretation
Bolt (Screw)	6×12	6mm diameter, 12mm length
Pin	8×14	8mm diameter, 14mm length
O-Ring	9.5×1.6	9.5mm diameter, 1.6mm thickness
Oil seal	14×24×5	14mm inside diameter, 24mm outside diameter, 5mm thickness
Tube	5×130	5mm inside diameter, 130mm length

5. Supersedence of parts

Part numbers given under the part name in the "Description" column indicate that the part number has been superseded by that part number. HONDA may make such supersedence without notice.

6. Assemblies

Sections framed with broken lines in the exploded view drawings are available as complete assemblies. (Their individual parts can also be obtained.)

7. Required quantity

The number given in the "Reqd. No." column indicates the quantity of parts used in the section described in that block.

Parts with quantities in () represent optional parts.

Part whose required number is "N", is part whose required number can be selected at need.

8. Part modifications and applicable serial numbers

In cases where a part has been modified, the serial number of the first vehicle (or frame, engine, carburetor) bearing the modification is listed in the "Serial No." column.

9. Models, area codes and applicable serial numbers

Models, area codes and applicable serial Nos. given in this parts catalogue can be identified as follows.

Parts with area codes are exclusive for models destined for countries designated. If no area codes are listed, parts are for common use.


Model	Area code	Type	Applicable engine serial No.	Applicable frame serial No.	Applicable carburetor identification No.
CBX400Fc	ED	European direct sales	NC07E-1004331~1058184	NC07-2000013~2007446	VE50A
	F	France	NC07E-1004331~1058494	NC07-2000023~2007445	VE50A
	U	Australia	NC07E-1004331~1058184	NC07-2000014~2007447	VE50A
CBX400F2c	ED	European direct sales	NC07E-1004331~1058184	NC07-2002073~2007189	VE50A
	F	France	NC07E-1004331~1058184	NC07-2002073~2007743	VE50A

* Of carburetor identification numbers, only the portions underlined in the example below are used for registration.


VE50A KC 7

B 4

10. Location of stamped serial number

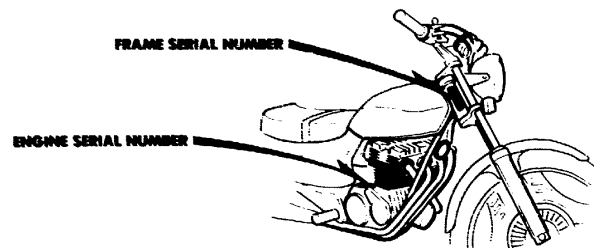

BMA6-0A



BMA6-0B

11. Selection table for lock or blank key

Refer to the following selection table to select the lock or blank key.

Type	Key No.
TYPE 1	*01 ——— *20
	A** , B**
TYPE 2	*21 ——— *40
	C** , D**

*: 0, 1, 2, 3, 4, 5, 6, 7, 8 or 9

III. How to use the flat rate time (F.R.T.)

This F.R.T. (Flat Rate Time) is used to determine the standard labor time allowed for replacement of parts covered by the warranty during the period the warranty is in effect. The F.R.T. for those parts which are not listed herein should be determined from the operation closely related to the replacement of that part.

1. The F.R.T. is based on the following servicing conditions

- A liberal allowance is added to the net servicing time.
- Standard times specified are based on the condition that the necessary servicing tools listed in the service manual (motorcycle) which describes the HONDA service policy are available close at hand and the work performed by a mechanic with normal skill.
- Time required for inspection and operational test following the servicing is included in the F.R.T.

2. Method of computing

The job times are listed in tenth of an hour to simplify computation.

(Example) 0.3 = 18 minutes
5.6 = 5 hours and 36 minutes

CONVERSION CHART			
Hours	Minutes	Hours	Minutes
0.1	6	0.6	36
0.2	12	0.7	42
0.3	18	0.8	48
0.4	24	0.9	54
0.5	30	1.0	60

3. Computing the F.R.T.

When several jobs are performed at the same time, make the calculation in the following manner.

a. Jobs of non duplicated nature

The F.R.T. for the job is obtained by totalling the F.R.T. for each part replaced.

(Example) Replacement of cylinder and clutch spring.

Service item	F.R.T.
Cylinder	3.1
Clutch spring	0.5

The F.R.T. for the job is: $3.1 + 0.5 = 3.6$

b. Jobs of duplicated nature

Take the F.R.T. for the last part to be replaced.

(Example) Replacement of piston and cylinder head gasket.

Service item	F.R.T.
Cylinder head gasket	2.5
Piston	3.2

The F.R.T. for the job is: 3.2

c. Jobs of partially related nature

Total up the F.R.T. for all of the parts replaced and then subtract the F.R.T. for the duplicated operation.

(Example) Replacement of gearshift drum and crankshaft assembly.

Service item	F.R.T.
Gearshift drum	*4.8
Crankshaft	*7.7
Crankcase disassembly	*4.5

The F.R.T. for the job is: $(4.8 + 7.7) - 4.5 = 8.0$

Crankcase disassembly is the duplicated operations.

● The F.R.T. shown with (*) includes engine removal and installation.



4. Operations other than replacing parts

a. Removal and installation

No.	Service item	F.R.T.
1	Engine	2.5
2	Cylinder head	2.5
3	Carburetor	0.7

b. Adjustment, measurement and cleaning

Engine

No.	Service item	F.R.T.
1	Ignition timing-inspection	0.2
2	Spark plug-adjustment and cleaning	0.3
3	Tappet adjustment	0.8
4	Carburetor idle-adjustment	0.1
5	Engine oil-inspection (excluding oil change)	0.1
6	Clutch-adjustment	0.1
7	Cleaner element-cleaning	0.1
8	Compression-pressure measurement	0.4
9	Battery-checking of electrolyte level and gravity	0.2
10	Carburetor-float level measurement	1.0
11	Oil filter cleaning	0.2
12	Throttle operation-adjustment	0.1
13	Carburetor synchronization-adjustment	0.6

Frame


No.	Service item	F.R.T.
1	Front brake-air bleeding	0.2
2	Rear brake-air bleeding	0.2
3	Brake-operation test	0.1
4	Headlight-aimings	0.1
5	Drive chain (includes tension adjustment however, does not include sprocket)	0.1
6	Front wheel balance	0.8
7	Rear wheel balance	0.9

c. Overhaul

No.	Service item	F.R.T.
1	Carburetor	2.8

● This parts catalogue is compiled as of February 20, 1985.

B 7

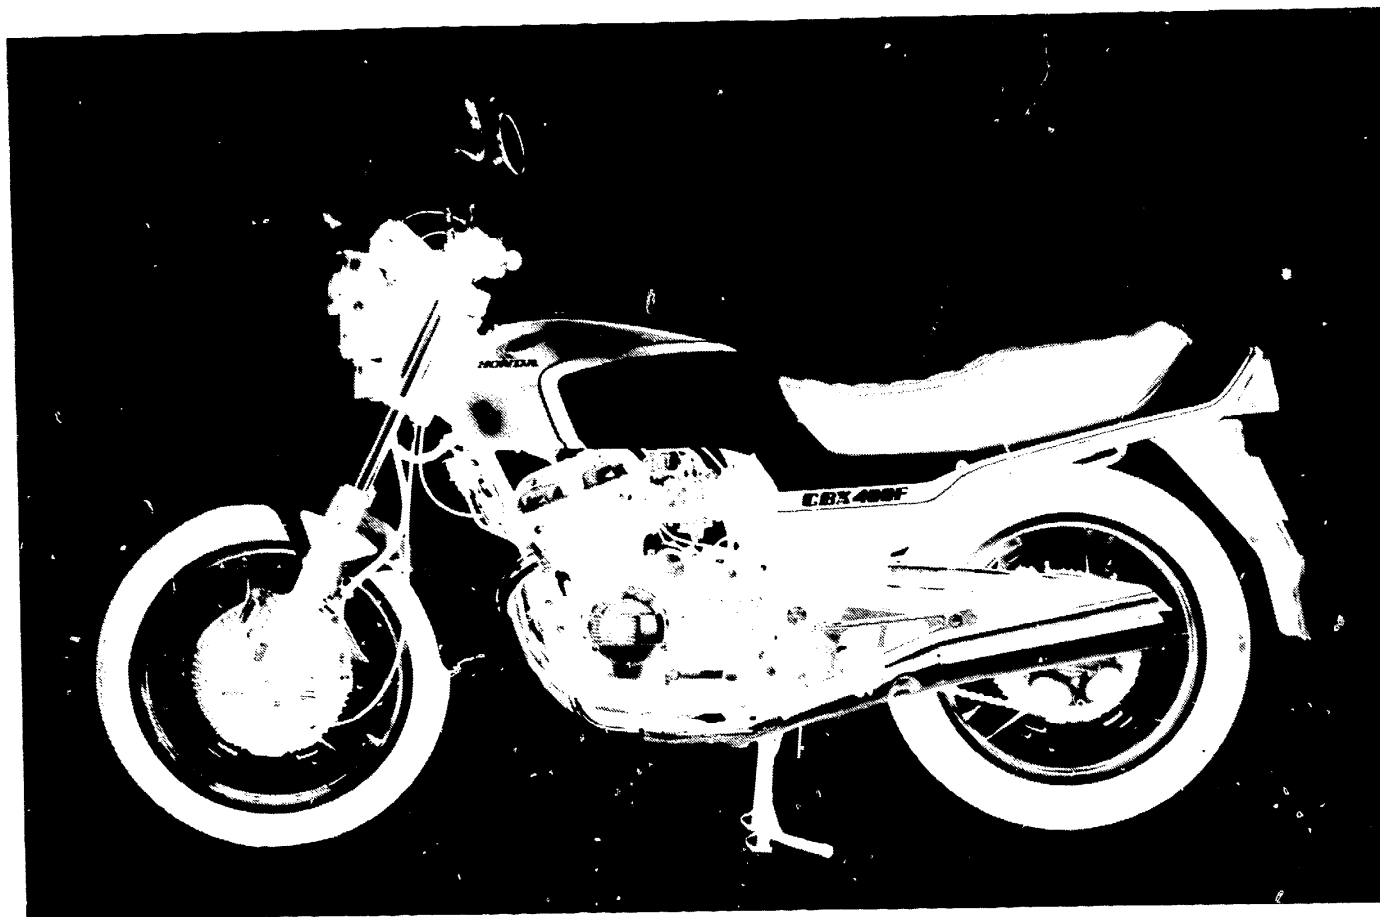

CBX100F



Part No.	Address No.	33120-371-601
N° de pièce	N° de Adresse	33120-371-611
Teile-Nr.	Adresse-Nr.	33121-405-671
No. de pieza	No. de dirección	33121-463-771
		33128-292-670
31200-MA6-008	D1	33128-438-841
31201-MA6-000	D1	33153-422-003
31204-MA6-000	D1	33153-463-771
31205-MA6-000	D1	33154-438-841
31206-MA6-000	D1	33155-463-771
31207-179-711	D1	33156-438-841
31500-413-721	H12	33157-463-771
31600-MA6-000	J10	33165-463-771
31700-124-003	J10	33170-390-611
31700-124-008	J10	
32000		
32100-MA6-000	J10	33400-MA6-620
32100-MA6-750	J10	33400-MB0-003
32102-MA6-000	J10	33401-MA6-003
32103-MA6-720	K10	33401-MA6-621
32104-MA6-720	K10	33402-MA6-003
32105-MA6-720	K10	33402-MA6-013
32106-MA6-000	C15	
32107-MA6-000	J10	33406-MA6-003
32108-MA6-720	K10	33410-MA6-621
32110-MA6-000	J12	33441-MA6-620
32110-MA6-720	J12	33450-MA6-620
32110-MA7-000	J12	33450-MB0-003
32111-323-000	C12	
	D6	33460-MA6-621
	E4	33600-MA6-621
32112-GA7-003	J8	33602-MA6-621
32350-MA7-840	J10	33605-MA6-600
32401-MA6-000	H12	33606-MA6-600
32410-MA6-000	H12	33607-MA6-600
32411-253-000	H12	33615-MA6-600
32412-426-000	H12	33650-MA6-621
32412-471-000	H12	33701-MA6-621
32601-MA6-000	H12	33701-MA6-622
32812-MA6-000	J10	33701-MA7-651
32812-MA6-750	J10	33702-MA6-621
32813-MA6-000	J10	33702-MA6-622
32814-MA6-000	J4	33703-MA6-621
33000		
33100-MA7-830	F5	33703-MA7-651
33100-MA7-350	F5	33708-147-003
33100-422-601	F2	33709-MA6-621
33100-422-611	F2	33711-MA6-620
33100-422-621	F2	33741-415-601
33100-438-851	F5	33905-371-601
33100-438-931	F5	
33101-460-671	F2	34901-MC7-601
33103-346-670	F2	
	F5	34901-371-601
33103-438-841	F5	
33107-300-003	F2	34901-371-621
	F5	
33107-438-841	F5	34903-388-611

F2	34903-388-611
F5	34904-303-003
F5	34906-447-711
F2	34908-GA7-701
F5	34908-634-611
F2	
F2	35000
F5	
F2	35010-MA6-000
F5	35010-MA6-630
F2	35100-MA6-007
F6	35100-MA6-631
F6	35101-MA6-007
F2	35121-MA6-811
F6	35122-MA6-811
F6	35150-MA6-003
F6	35200-MA6-003
F6	35210-MA6-000
F6	35330-413-003
F6	35340-MA5-671
F2	35350-166-000
F6	35357-426-610
F3	35500-MB9-004
F6	35600-422-003
J4	35753-MA6-000
J4	35850-GB5-671
J5	35850-MA6-750
J4	35856-425-000
37000	
J5	37105-MA6-621
J4	37200-MA6-621
J4	37211-MA6-008
J4	37215-MA6-008
J4	37220-MA6-008
J4	37243-MA6-008
J6	37243-323-000
J5	37244-MA6-008
J5	37250-MA6-621
J5	37250-MA6-650
J5	37260-MA6-000
J5	37261-438-000
J5	37300-MA6-621
J5	37616-MA6-621
J5	37616-MA6-622
J8	37617-MA6-008
J8	37618-MB2-008
J8	37800-MA6-008
38000	
J8	
J8	38110-MA6-004
J8	38200-MA6-005
J8	38200-422-005
J8	38210-MA6-000
J2	38215-438-300
F3	38215-438-620
F6	38250-MA6-005
	38251-MA6-005
	38252-MA6-005
	38253-422-005
F3	38301-415-004
F6	38306-292-000
F3	
F6	40000
F3	
F6	405A3-MA6-621
F3	405A3-460-791

F6	40510-MA6-000
F3	40543-MA6-000
J8	
F8	41000
J6	
	41200-MA6-620
	41212-MA6-000
	41241-MA6-000
F15	
F15	42000
F15	
F15	42301-MA6-000
F15	42312-MC4-000
F15	42313-MA6-000
F15	42610-MA6-620
F10	42620-MC4-000
F10	42625-MA6-000
F15	42650-MA6-621
F10	42704-MC7-000
F13	
I5	42705-MC7-000
I5	
C5	42706-MC7-000
E4	
E4	42710-MA6-621
H12	42710-MA6-622
H12	42753-425-003
H12	
	42753-425-004
8	43000
F8	
F8	43100-MA6-006
F8	43100-MA6-007
F8	43100-MA6-016
F8	43100-MA6-017
I6	43100-MA6-026
F8	43100-MA6-027
F8	43101-MA6-006
F8	43101-MA6-016
F8	43110-MA6-006
F8	43110-MA6-016
F8	43110-MA6-026
F8	43140-MA6-000
F8	43140-MA6-750
F9	43142-MA6-000
F9	43145-MA6-006
H7	43150-MA6-000
	43310-MA6-003
	43352-568-003
J10	
F15	43353-461-771
F15	
F15	43437-MA6-000
F15	43500-MA6-621
F15	43503-422-006
H12	43504-371-013
H12	43511-MA6-006
H12	43512-MA6-000
H12	43513-461-771
H16	43514-445-771
H16	43520-MA3-641
	43530-MB9-006
	44000
	44000
I11	
I11	44301-MA6-000

I11	44311-413-000
H3	44602-MA6-000
	44620-286-000
	44650-MA6-620
H3	44680-410-000
H3	44710-MA6-003
H3	44710-MA6-004
	44806-MA6-003
	44809-MA6-000
	44830-MA6-000
	44831-MA6-000
	44832-MA6-000
	45000
H3	
H3	45010-MA6-305
H3	45010-MA6-315
G13	451A1-MA6-006
H3	45100-MA6-006
G13	45100-MA6-007
H3	45100-MA6-016
G13	45100-MA6-017
H3	45100-MA6-027
H4	45101-MA6-006
H4	45101-MA6-016
G13	45105-MA6-004
H4	
G13	45105-MA6-007
H4	
	45107-MA3-006
	45107-MA6-006
	45108-MA6-006
H1	45109-166-006
H1	45109-961-006
H1	45111-MA6-000
H1	45112-MA6-006
H1	45125-MA6-003
H1	45131-MA6-006
H1	45133-MA6-006
H4	45140-MA6-000
H4	45140-MA6-750
H4	45142-MA6-000
H1	45145-MA7-006
G10	45209-166-006
H1	45209-961-006
G15	45215-MA6-006
G10	
H1	45231-MA6-006
G10	
H2	45251-MA6-000
G15	
G15	45451-471-000
G15	45500-MA6-621
G15	45504-410-003
G15	45512-MA6-006
G15	45513-MA7-006
G15	45517-MA5-671
G15	45520-MA5-671
G15	45520-300-000
G15	45521-300-010
G15	45522-422-000
	45530-471-831

G13	46000
G13	
H4	46182-500-013
G13	46500-MA6-000
G13	46503-371-000
G13	46504-445-771
G13	46510-MA6-000
G13	46514-MA6-000
G10	
G10	50000
F9	
F9	50100-MA6-600ZA
G10	50100-MA6-610ZA
	50146-MA6-000
	50201-MA6-000
	50203-MA6-000
G10	50301-268-000
G10	50302-268-000
G10	50327-MA6-000
G10	50328-MA6-000
G10	50330-MA6-000
G10	50330-MA6-750
G10	50351-MA6-000
G11	50352-MA6-000
G11	50353-MA6-000
G11	50354-MA6-000
G11	50354-422-000
H2	50355-MA6-000
G11	50356-MA6-000
H2	50362-MA6-000
H2	50500-MA6-000
G11	50503-MA6-000
G11	50527-MA6-000
H2	50540-MA6-600
H2	50543-MA6-000
G11	50548-356-700
G11	50548-438-000
G11	50549-356-700
H2	50600-MA6-000
F13	50603-033-000
G11	50612-MA6-000
H2	50614-413-000
G11	50618-MA6-000
H2	50619-MA6-000
G13	50628-MA6-000
G13	50630-MA6-000
G14	50640-MA6-000
G11	50643-MA6-000
H2	50661-425-670
G11	50700-MA6-000
G11	50710-377-000
H2	50711-MA6-000
G11	50712-MA6-000
H2	50712-413-000
G14	50715-MA6-000
H4	50750-MA6-000
G4	
F13	51000
F13	51400-MA6-621
F13	51401-MA6-003
F13	51402-MA6-003
F13	51403-MA6-003
G15	51404-MA6-003
G15	51405-MA6-003
F13	51405-MC7-003
F13	51406-MA6-003
F13	51410-MA6-003
	51412-422-003

B 10

Part No. Address No.
N° de pièce N° de Adresse
Teile-Nr. Adresse-Nr.
No. de pieza No. de direccion

51414-469-003 G5
51415-MA6-003 G5
51416-461-003 G5
51417-MA6-003 G5
51418-MA6-003 G5
51421-MA6-003 G5
51423-MA6-003 G5
51432-MA6-003 G6
51433-MC7-003 G6
51434-MC7-003 G6
51435-MC7-003 G6
51436-MA6-003 G6
51437-461-003 G6
51438-MA6-003 G6
51439-MA6-003 G6
51440-MA6-003 G6
51440-MA6-621 G6
51441-MC7-003 G6
51442-MC7-003 G6
51443-MC7-003 G6
51445-MC7-003 G6
51447-469-003 G6
51450-MA6-003 G6
51456-469-013 G6
51480-MB1-731 I 15
51490-MA6-305 G7
51495-MA6-300 G7
51500-MA6-621 G7
51510-MA6-003 G7
51510-MA6-621 G7
51521-MA6-003 G7
51522-MA6-003 G7
51523-MA6-003 G7
51530-MA6-000 G11
51532-MA6-300 G7
51533-MA6-000 G12
51535-MA6-000 G12
51536-MA6-000 G12
51540-MA6-003 G7
51555-MA6-003 G7

52000

52102-MA6-000 I 11
52110-MA6-000 I 11
52110-MA6-750 I 11
52118-MA6-000 I 11
52119-MA6-000 I 11
52136-MA6-000 I 11
52170-MA6-000 I 11
52180-MA6-000 I 15
52400-MA6-621 I 15
52400-MA6-761 I 15
52406-MC7-003 I 15
52425-169-003 I 15
52425-381-771 G7

52452-MA1-731
52453-MA1-731
52462-MA2-000
52462-MA6-000
52470-MA6-000
52472-MA6-003
52474-MA6-003
52474-MA6-013
52475-MA6-003
52475-MA6-013
52478-MC7-003
52483-MA6-000
52485-MA2-003
52501-MA2-000
52611-MA6-003
52611-MA6-751
52612-MA6-003

53000

53100-MA6-600
53105-MA6-000
53137-MB7-611
53139-460-840
53141-422-000
53150-MA6-600
53165-422-000
53166-422-000
53170-MA2-000
53175-MA6-006
53178-MA6-000
53180-422-010
53192-268-000
53192-425-000
53200-KE8-000
53200-MA6-000
53200-MA6-610
53200-MA6-640
53211-268-000
53212-250-000
53214-250-000
53215-250-000
53220-KE8-010
53220-286-000
53230-MA6-750
53231-MA6-000
53600-404-611
53603-051-000
53604-098-940

61000

61100-MA6-000ZA
61100-MA6-000ZD
61100-MA6-010ZA
61100-MA6-010ZD
61101-441-000
61104-MA6-000
61104-MA6-720
61104-428-000
61301-MA6-000
61302-425-000
61303-MA6-000
61303-425-010
61304-162-013
61304-292-000
61305-MA6-720
61306-MA6-720

I 15 61307-MA6-720
I 15 61307-MA6-721
I 15 61308-MA6-720
I 15 61308-MA6-721
I 15 61308-MA6-722
I 15 61309-MA6-720
I 15 61309-MA6-721
I 15 61311-MA6-000
I 15 61311-MA6-620
I 15 61311-MA6-720
I 16 61312-MA6-000
I 16 61312-MA6-620
I 16 61312-MA6-720
I 16 61313-422-000
I 16 61315-MA6-000
I 16 61315-MA6-720
I 16 61316-MA6-720
I 16 61317-MA6-720
I 16 61318-MA6-000
I 16 61319-MA6-000
I 16 61401-MA6-620

64000

64100-MA6-720
64101-MA6-720
64102-MA6-700
64105-MA6-720
64109-MA2-000
64200-MA6-720ZA
64200-MA6-720ZB
64200-MA6-730ZA
64200-MA6-730ZB
64203-166-610
64218-MA2-000
64279-MA2-000
64501-MA6-720
64503-MA6-720
64511-MA6-720
64511-MA6-770
64512-MA6-720
64512-MA6-770
64513-MA6-720
64522-MA6-720
64530-MA6-000
64531-MA6-720
64532-MA6-720

77000

77121-438-000
77200-MA6-600
77200-MA6-760
77202-MA6-000
77207-MA6-000
77208-MA6-000
77208-MA6-750
77209-MA6-750
77220-MA6-600ZA
77220-MA6-620ZA
77220-MA6-620ZB
77220-MA6-630ZA
77220-MA6-630ZB
77220-340-11
77228-MA6-620ZA
77228-MA6-620ZB
77228-MA6-630ZA
77228-MA6-630ZB
77228-340-001

K 10 77229-MA6-620ZA
K 10 77229-MA6-620ZB
K 11 77229-MA6-630ZA
K 11 77229-MA6-630ZB
K 11 77229-340-001
K 11 77230-MA6-007
K 11 77230-MA6-620ZA
J 6 77230-MA6-620ZB
J 6 77230-MA6-630ZA
K 11 77230-MA6-630ZB
J 6 77310-MA2-770
J 6 77310-MA6-640
K 11 77313-MA6-601
J 6 77320-MA2-770
G 3 77330-MA6-600
K 11 77331-MA2-770
K 11 77340-MA6-600

80000

80100-MA6-600
80100-MA6-630
80102-MA6-000
80105-MA6-000
80105-MA6-750
80106-MA6-000
80108-MA6-000
80111-MA6-750
80112-MA6-000
80114-MA6-000
80121-MA6-630
80122-MA6-630
80122-315-730

81000

81222-GA7-810

83000

83551-MA6-000
83551-300-000
83610-MA6-000ZA
83610-MA6-620ZA
83610-MA6-620ZB
83610-MA6-630ZA
83610-MA6-630ZB
83610-MA6-720ZA
83610-MA6-720ZB
83610-MA6-730ZA
83610-MA6-730ZB
83642-355-000
83710-MA6-000ZA
83710-MA6-620ZA
83710-MA6-620ZB
83710-MA6-630ZA
83710-MA6-630ZB
83710-MA6-720ZA
83710-MA6-720ZB
83710-MA6-730ZA
83710-MA6-730ZB

84000

84100-MA6-601
84200-MA6-601

K 2 87000
K 2 87101-MA6-620ZA
K 5 87101-MA6-620ZB
K 5 87101-MA6-730ZA
H 10 87101-MA6-730ZB
H 10 87102-MA6-620ZA
K 2 87102-MA6-620ZB
K 5 87102-MA6-730ZA
K 5 87102-MA6-730ZB
H 10 87103-MA6-620ZA
H 10 87103-MA6-620ZB
H 10 87103-MA6-730ZA
H 10 87103-MA6-730ZB
H 10 87110-MA6-000ZA
H 11 87121-MA6-300ZA
H 11 87121-MA6-620ZA
H 11 87121-MA6-630ZA
H 11 87121-MA6-630ZB
J 2 87122-MA6-300ZA
J 2 87122-MA6-620ZA
J 2 87122-MA6-620ZB
J 2 87122-MA6-630ZA
J 2 87122-MA6-630ZB
J 2 87126-MA6-300ZA
J 2 87126-MA6-630ZA
J 2 87126-MA6-630ZB
J 2 87126-MA6-730ZA
J 2 87126-MA6-730ZB
J 2 87128-MA6-620ZA
J 2 87128-MA6-620ZB
J 2 87128-MA6-630ZA
J 2 87128-MA6-630ZB
J 2 87128-MA6-720ZA
H 11 87129-MA6-620ZA
H 11 87129-MA6-620ZB
H 11 87129-MA6-630ZA
H 11 87129-MA6-630ZB
H 13 87503-MA2-300
H 13 87505-MA6-620
H 13 87505-MA7-600
H 13 87506-MA6-600
H 13 87506-MA6-720
H 13 87507-443-630
H 14 87507-443-690
H 14 87511-323-670
H 14 87515-MA6-720
H 14 87515-MA6-730
H 14 87517-MA6-620ZA
H 16 87517-MA6-630ZA
H 16 87517-MA6-630ZB
H 16 87517-MA6-760ZA
H 16 87517-MA6-760ZB
H 16 87518-MA6-620
H 16 87518-MA6-630
H 16 87522-463-930
H 16 87522-463-950
H 16 87560-181-760ZB
H 16 87560-463-830ZB

88000

88110-MA6-003
88110-MA6-620
88110-MA6-721

88120-MA6-620
88120-MA6-721
88800-MA6-601
89000
89001-MA6-750
89010-MA6-600
89010-MA6-760
89101-MA6-620
89101-MA6-760
89102-469-003
89216-438-000
89221-371-000
89221-429-000
89301-463-771

90000

90001-MA2-770
90006-MA6-720
90007-MA6-720
90008-415-000
90011-MA6-000
90012-333-000
90013-MA6-000
90014-MA6-000
90015-MA6-000
90016-MA6-000
90017-MA6-000
90018-MA6-000
90019-MA6-000
90020-MA6-000
90021-MA6-000
90022-425-000
90023-MA6-000
90024-MA6-000
90025-MA6-000
90026-MA6-000
90031-MA6-000
90032-MA6-000
90035-MA6-000
90041-MA6-000
90042-MA6-000
90082-MA6-000
90084-471-000
90086-413-000
90102-434-671
90105-MA6-000
90105-MA6-750
90105-422-000
90106-MA6-000
90106-MA6-750
90108-223-000
90111-162-000
90112-MA6-700
90113-438-000
90114-MA6-671
90116-MC7-003
90116-283-010
90119-300-000
90119-671-000
90120-MA6-000
90121-MA6-000
90125-MA6-000
90125-410-000
90126-MA6-000
90128-KE8-000
90128-MA6-000

F 11
K 9
J 15
J 3
J 15
J 15
J 15
J 15
J 15
J 15
J 15
J 15
J 15
J 15
J 15
J 15
H 11
K 9
K 9
E 4
C 3
C 9
D 1
D 1
E 2
C 5
C 5
C 5
C 5
D 6
D 6
D 3
C 15
D 3
D 6
D 4
D 7
D 7
C 5
D 7
D 7
C 5
D 3
C 11
F 9
F 16
I 7
I 7
I 7
I 9
I 1
K 12
F 11
F 13
G 7
G 8
H 4
I 9
G 12
I 12
J 13
I 9
J 14
G 14
G 14

B 11

Part No. Address No.
N° de pièce N° de Adresse
Teile-Nr. Adresse-Nr.
No. de pieza No. de direccion

90129-KE7-000 H4
30129-MA1-740 K12
90129-MA6-000 H4
90130-MA6-000 G12
90145-961-000 F13
90150-463-771 G16
90151-422-000 F6
90152-MA1-000 F3
90153-438-000 I16
90155-MA6-000 F16
90155-369-000 F16
90160-MA6-720 K12
90161-MA6-720 K12
90185-MA6-000 I16
90186-MA6-000 I16
90187-MA6-000 I16
90188-MA6-000 I16
90206-246-000 C9
90208-438-000 I7
90221-MA6-000 I12
90232-MA6-000 C5
90233-MA6-000 C5
90235-444-000 C13
90300-MA6-600 H11
90301-MA6-003 G14
90301-471-000 I3
90301-693-000 F7
90302-KE8-003 G14
90304-GA6-003 I9
90304-425-000 I16
90305-MC0-003 F16
90308-357-000 H4
90309-428-731 H4
90321-MA6-750 J14
90321-422-000 F11
90355-MA6-000 F11
90355-369-000 F16
90370-MA2-000 F11
90370-MA6-600 J6
90380-MA6-000 J6
90380-MA6-010 J6
90400-438-850 K12
90401-373-770 J3
90403-MA6-000 C5
90407-259-000 C5
90432-428-000 C13
90433-MA6-000 E1
90441-469-000 C5
90441-909-000 D7
90451-115-000 E5
90451-292-000 C3
90451-371-000 E1

90452-323-000
90453-292-010
90454-428-000
90456-MA6-000
90457-MA6-000
90457-422-000
90458-MA6-000
90461-286-000
90462-323-000
90473-MA6-000
90488-044-000
90501-310-000
90502-461-000
90503-283-000
90504-MA6-000
90506-500-000
90512-422-000
90513-405-000
90514-700-000
90542-MA6-000
90543-MA6-000
90543-273-000
90544-283-000
90545-MA6-000
90545-300-000
90546-MA6-000
90551-MA6-000
90552-MA6-000
90563-304-000
90601-MA6-000
90601-300-000
90601-469-000
90639-MA6-008
90650-MA6-720
90651-MA5-671
90651-MA6-000
90701-MA6-010
90704-MA6-000
90851-MA6-000
91000
91004-MA6-003
91005-MA6-003
91008-374-003
91022-MA6-003
91071-MA0-003
91071-MA0-004
91101-377-000
91105-MA6-000
91106-MA6-000
91201-MA6-000
91203-MA6-003
91203-146-003
91203-148-005
91205-MA6-003
91205-MA6-005
91206-MA6-003
91206-MA6-005
91212-422-006
91213-MA6-003
91213-MA6-006
91214-MA6-003
91214-MA6-006
91252-MC4-003
91252-MC4-005
91252-230-005


C5
E5
E1
E1
E1
D7
E1
E1
E1
D7
C5
G16
H8
F16
I7
K12
I12
I12
H11
D1
C3
G8
G8
C3
F13
G16
C3
J14
J14
C15
E1
E1
G8
F9
J10
K12
F13
G12
C9
E1
G12
E1
C13
E5
E1
I12
I12
D3
D4
D4
C12
D13
I12
I13
E2
E2
E5
E5
G16
I13
I13
I13
H5
H5
G14

91253-443-761
91253-443-762
91254-434-003
91256-425-005
91257-MA6-003
91258-410-006
91258-410-013
91261-MA0-003
91261-MA0-005
91262-MA0-003
91262-MA0-005
91301-200-000
91301-250-000
91301-469-003
91301-671-671
91302-MA6-003
91302-377-000
91303-MA6-000
91303-259-000
91303-377-000
91304-MA6-000
91304-MA6-003
91304-MC7-003
91305-MA6-000
91305-MC7-000
91306-MA6-003
91306-MA6-005
91308-MA6-005
91308-MC7-003
91309-MA6-000
91309-MC7-003
91310-MA6-003
91311-MA6-003
91311-MA6-005
91313-MA6-003
91313-MA6-005
91314-MA6-005
91315-MA6-003
91316-MA6-005
91351-MA6-000
91351-121-710
91356-MA6-003
91356-MA6-005
91356-428-003
91455-MA6-750
91456-MA2-770
91456-MA6-750
91551-723-650
91901-MA6-000

92000
92000-06008-0A
92000-06012
92000-06016-1A
92500-06035-0A
92700-06035-0B
92700-08050-3B
92716-10045-0E
92800-12000
93000
93481-08040-00
93491-08012-07
93500-03008-0H
93500-03008-1A
93500-03012-1A
93500-03014-0G
93500-04006-1G
93500-04008-0A
93500-04008-1A
93500-04010-0A
93500-04012-0H
93500-04014-0A
93500-05008-0A
93500-05008-0H
93500-05008-1H
93500-05010-0A
93500-05010-1A
93500-05014-0G
93500-05016-0A
93500-05016-0B
93500-05016-0G
93500-05020-0G
93500-05025-0G
93500-06012-0A
93500-06012-1A
93500-06012-1G
93500-06016
93500-06020-0G
93500-06032-0A
93600-04010-1B
93600-04012-1G
93700-05025-0A
93891-05010-07
93891-05010-08
93891-05025-00
93891-05028-07
93891-05032-07
93891-05045-07
93891-05050-07
93891-06016-00
93892-04012-00
93892-05018-07
93893-04008
93893-04012-18
93894-06016-07
93901-32320
93901-34610
93903-25320

94000
94001-03000-0S
94001-04000-0S
94001-06000-0S
94001-08000-0S
94002-06000
94002-06000-0S
94002-08000-0S
94002-12080-0S
94021-04070-0S
94021-06270-0S
94021-08000-0S
94021-08270-0S
94021-10070-0S
94030-08000
94030-08080
94030-10000
94050-06000
94050-06080
94050-08000
94050-10000
94101-04700
94101-04800
94101-06000
94101-06800
94101-08000
94101-08200
94101-12800
94102-10700
94103-03000
94103-06700
94109-12000
94111-03800
94111-04800
94111-05000
94111-06000
94111-08000
94111-08700
94111-10700
94111-12800
94201-16150
94251-06000
94251-08000
94301-08140
94301-10160
94302-10160
94305-40102
94510-10000
94510-14000
94520-40000

94520-47000
94601-15000
95000
95002-02070
95002-02120
95002-02130
95003-19040-31
95003-23275-31
95005-50025-30
95005-80120-20
95011-64000
95014-41100
95014-61100
95014-61300
95014-71702
95015-81000
95700-06010-07
95700-06010-10
95700-06010-17
95700-06012-00
95700-06012-07
95700-06012-08
95700-06014-00
95700-06014-08
95700-06016-00
95700-06016-07
95700-06016-08
95700-06020-00
95700-06020-08
95700-06022-00
95700-06022-07
95700-06025-00
95700-06025-07
95700-06025-08
95700-06028-00
95700-06032-00
95700-06040-07
95700-06040-08
95700-06045-00
95700-06050-00
95700-06060-00
95700-08012-00
95700-08014-07
95700-08016-00
95700-08018-00
95700-08028-00
95700-08032-00
95700-08032-07
95700-08035-00
95700-08040-00
95700-08045-00
95700-08045-07



Part No.	Address No.	99002-13500	J 15
N° de pièce	N° de Adresse	99003-10000	J 15
Teile-Nr.	Adresse-Nr.	99003-20000	J 15
No. de pieza	No. de direccion	99003-30000	J 15

99003-40000	J 16
99003-50000	J 16
99006-12000	J 16
99006-19000	J 16
99006-22000	J 16
99101-393-0880	E 10
99103-MA6-003	E 10

95700-08050-00	J 3
95800-06060-00	I 13
95800-06060-10	I 13
95800-08032-00	I 4
95800-08060-00	J 14
95800-10040-00	J 14
95800-10045-00	J 14
95800-10080-00	J 14
95900-08040-09	E 5
95920-06020-08	C 14

96000

96000-06012-00	D 3
96000-06014-00	C 11
	D 8
96000-06016-00	C 2
	C 11
	D 3
96000-06018-00	C 3
	C 6
96000-06025-07	F 14
96000-06028-00	C 12
	D 3
	E 5
96000-06028-07	K 13
96000-06035-00	D 3
	E 5
96000-06040-00	C 16
96000-06045-00	C 16
96100-60000-00	C 14
96100-62030-10	I 14
96100-62043-00	E 2
96120-62040-10	H 5
96120-63020-10	G 14
96140-63030-10	H 5
96211-05000	G 9
96211-08000	G 3
96220-40080	D 8
96220-40130	E 6
96220-40148	E 6

98000


98061-57616	C 6
98061-57626	C 6
98061-58616	C 6
98061-58626	C 6
98061-59616	C 6
98061-59626	C 6
98200-21500	G 1
98200-53000	H 15

99000


99001-10120	J 15
99001-14170	J 15




BLOCK INDEX - ENGINE GROUP



E- 1	Oil cooler	C 2
E- 2	Cylinder head cover	C 3
E- 3	Cylinder head	C 4
E- 4	Cylinder	C 7
E- 5	Camshaft • Valve	C 8
E- 6	Cam chain • Tensioner	C 10




E- 7	Clutch cover	C 12
E- 8	Clutch	C 13
E- 9	Generator • Dynamo cover ..	C 15
E-10	Starter motor	D 1
E-11	Pulse generator	D 2
E-12	Oil pump	D 4
E-13	Oil filter • Oil pan	D 5
E-14	Crankcase	D 6



E-15	Crankshaft • Piston	D 9
E-16	Transmission	D 15
E-17	Gearshift drum	E 3
E-18	Carburetor (Assy. • Link)	E 7
E-18-1	Carburetor (Component parts)	E 9

Optional parts

EOP-1	Gasket kit A	E 11
EOP-2	Gasket kit B	E 12




E-1

Oil cooler

Radiateur d'huile

Ölkühler

Enfriador de aceite

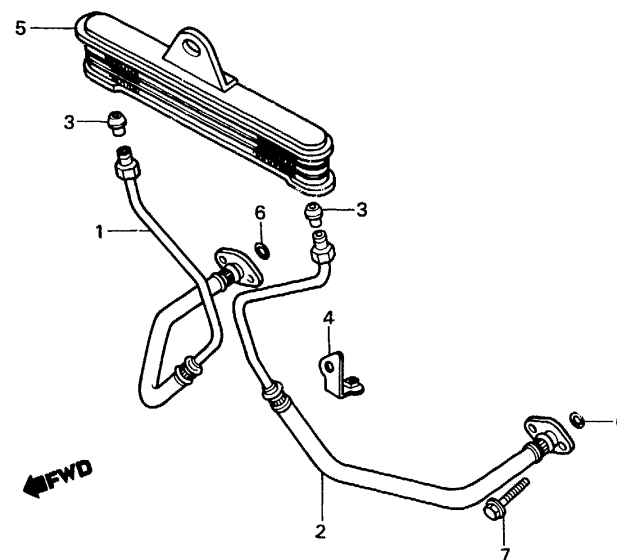

BMA6-1B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
HOSE COMP., R. OIL	0.4	1	15510-MA6-620	HOSE COMP., R. OIL	1 1	1048917	
HOSE COMP., L. OIL	0.2	2	15515-MA6-620	HOSE COMP., L. OIL	1 1		
COOLER COMP., OIL	0.3	3	15517-MA6-000	SEAT, OIL HOSE JOINT 15517-MA6-010	2 2		
			15517-MA6-010	SEAT, OIL HOSE JOINT	2 2	1048918	
		4	15518-MA6-000	CLAMP A, OIL PIPE	1 1		
		5	15600-MA6-620	COOLER COMP., OIL	1 1		
		6	91314-MA6-005	O-RING, 11X2.4	2 2		
		7	96000-06016-00	BOLT, FLANGE, 6X16	4 4		




E-2

Cylinder head cover

Couvercle de culasse

Zylinderkopfdeckel

Cubierta de culata

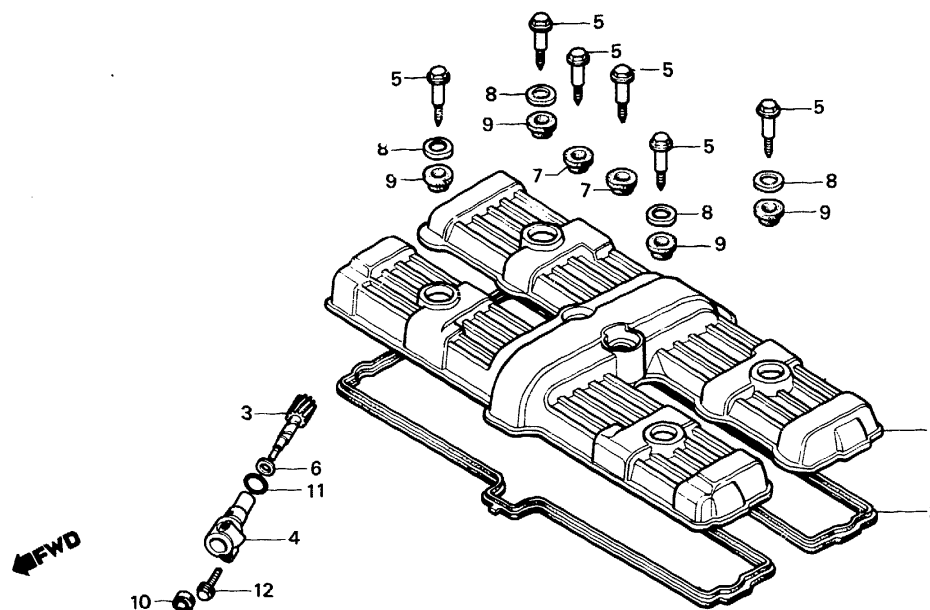

BMA6-2B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
COVER, CYLINDER HEAD	0.4	1	12310-MA6-000	COVER, CYLINDER HEAD	1	1	
GASKET, HEAD COVER		2	12391-MA6-000	GASKET, HEAD COVER	1	1	
GEAR, TACHOMETER	0.1	3	12431-MA6-000	GEAR, TACHOMETER	1	1	
(INC. RELATIVE PART)		4	12451-MA6-000	CAP, TACHOMETER GEAR	1	1	
		5	90011-MA6-000	BOLT, FLANGE, 6X30	6	6	
		6	90451-292-000	WASHER, THRUST, 7MM	1	1	
		7	90543-MA6-000	RUBBER B, MOUNTING	2	2	
		8	90545-MA6-000	WASHER, MOUNTING RUBBER	4	4	
		9	90546-MA6-000	RUBBER A, MOUNTING	4	4	
		10	91256-425-005	OIL SEAL, 4.8X14.5X5 (NIPPON)	1	1	
		11	91303-255-000	O-RING, 11X2.0	1	1	
		12	96000-06018-00	BOLT, FLANGE, 6X18	1	1	

C 4


E-3

Cylinder head

Culasse

Zylinderkopf

Culata

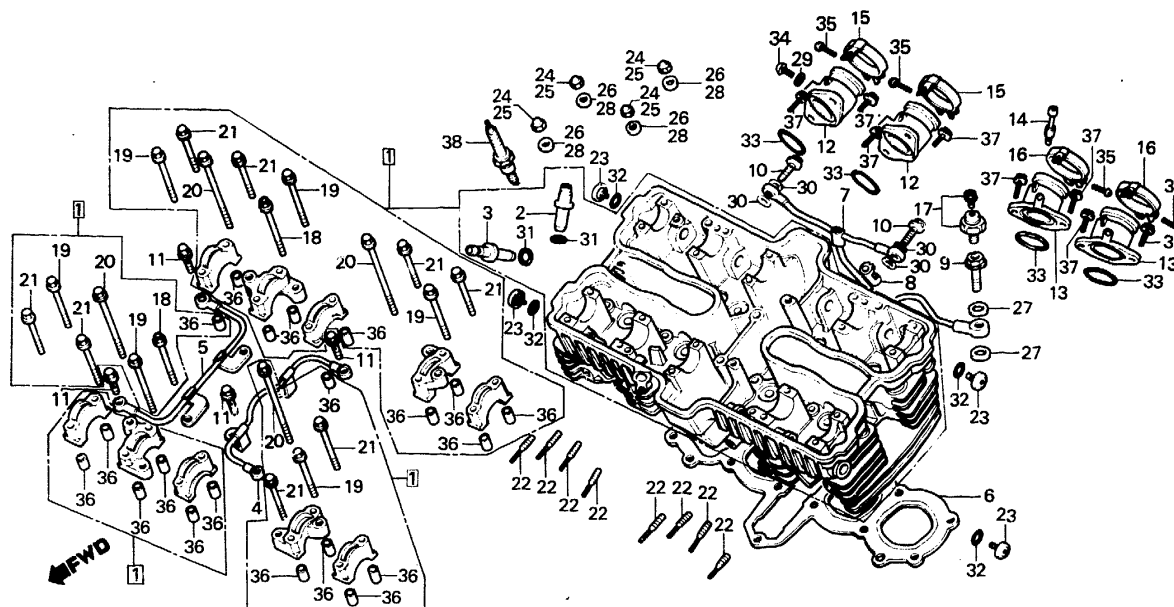

BMA6-3C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
HEAD ASSY., CYLINDER	6.7	1	12010-MA6-000	HEAD ASSY., CYLINDER	1 1		
GUIDE, VALVE	2.9	2	12204-MA6-305	GUIDE, IN. VALVE	8 8		
(INC. REAMING)		3	12205-MA6-305	GUIDE, EX. VALVE	8 8		
(ADD 0.2 FOR EACH.)		4	12230-MA6-000	PIPE COMP., L. OIL	1 1		
(EXC. VALVE REFACING)		5	12240-MA6-000	PIPE COMP., R. OIL	1 1		
(ADD MORE 0.2 IF PERFORMED)							
PIPE COMP., L. OIL	0.5	6	12251-MA6-000	GASKET, CYLINDER HEAD	1 1		
GASKET, CYLINDER HEAD	2.5	7	15520-MA6-000	PIPE COMP., OIL FEED	1 1		
PIPE COMP., OIL FEED	0.4	8	15525-MA6-000	RUBBER, OIL FEED PIPE	1 1		
INSULATOR, R. CARBURETOR	0.7	9	15531-MA6-000	BOLT, FLANGE, 12MM	1 1		
(ADD 0.1 FOR EACH.)		10	15532-MA6-000	BOLT, FLANGE, 8X30	2 2		
SWITCH ASSY., OIL PRESSURE	0.3	11	15533-MA6-000	BOLT, FLANGE, 7X20	4 4		
		12	16213-MA6-000	INSULATOR, R. CARBURETOR	2 2		
		13	16214-MA6-000	INSULATOR, L. CARBURETOR	2 2		
		14	16221-MA6-000	JOINT, PB	1 1		
		15	16223-MA6-000	BAND, R. CARBURETOR INSULATOR	2 2		

C 5


E-3

Cylinder head

Culasse

Zylinderkopf

Culata

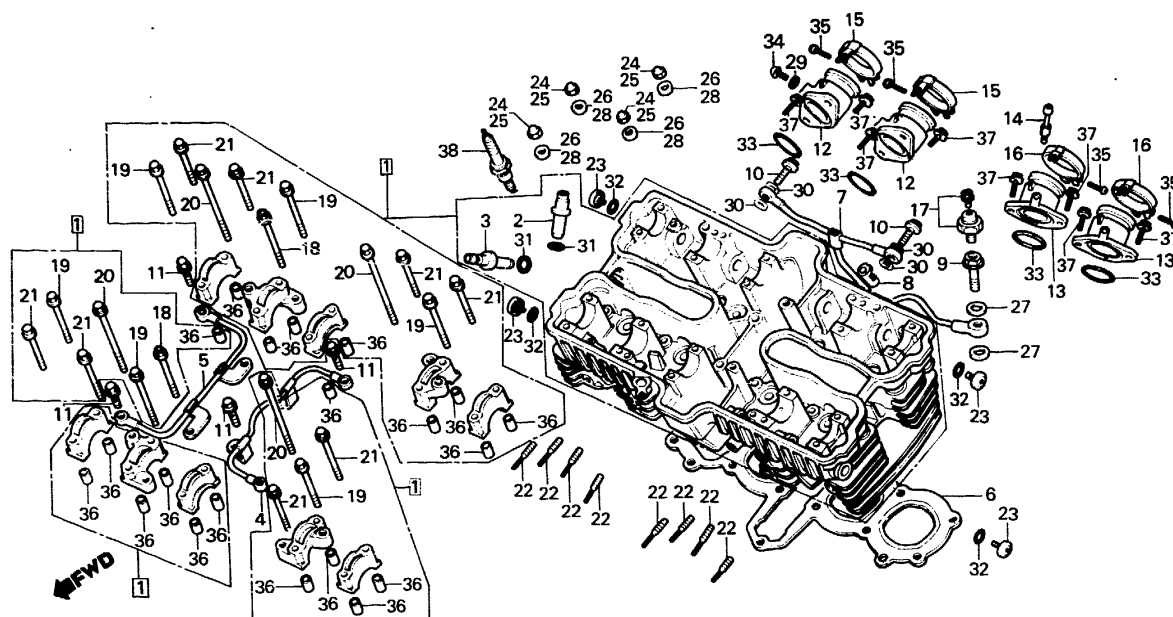

BMA6-3C

Service item	F.R.T.	Ref. No.	Part No.	Description	Regd. No. CBX400 Fc F2c	Serial No.	Area code
		16	16224-MA6-000	BAND, L. CARBURETOR INSULATOR	2 2		
		17	35500-MB9-004	SWITCH ASSY., OIL PRESSURE	1 1		
		18	90016-MA6-000	BOLT, SOCKET, 6X45.5	2 2		
		19	90017-MA6-000	BOLT, FLANGE, 6X45.5	6 6		
		20	90018-MA6-000	BOLT, FLANGE, 6X77	4 4		
		21	90019-MA6-000	BOLT, FLANGE, 6X39.5	8 8		
		22	90035-MA6-000	BOLT, STUD, 8-6X57	8 8		
		23	90082-MA6-000	BOLT, SEALING, 14MM	4 4		
		24	90232-MA6-000	NUT, CAP, 8MM	8 8		
		25	90233-MA6-000	NUT, CAP, 9MM	4 4		
		26	90403-MA6-000	WASHER, SEALING, 9MM	4 4		
		27	90407-253-000	PACKING, DRAIN COCK, 12.5X20	2 2		
		28	90441-469-000	WASHER, SEALING, 8MM	8 8		
		29	90452-323-000	WASHER, THRUST, 5MM	3 3		
		30	90488-044-000	WASHER, 8MM	4 4		

C 6


E-3

Cylinder head

Culasse

Zylinderkopf

Culata

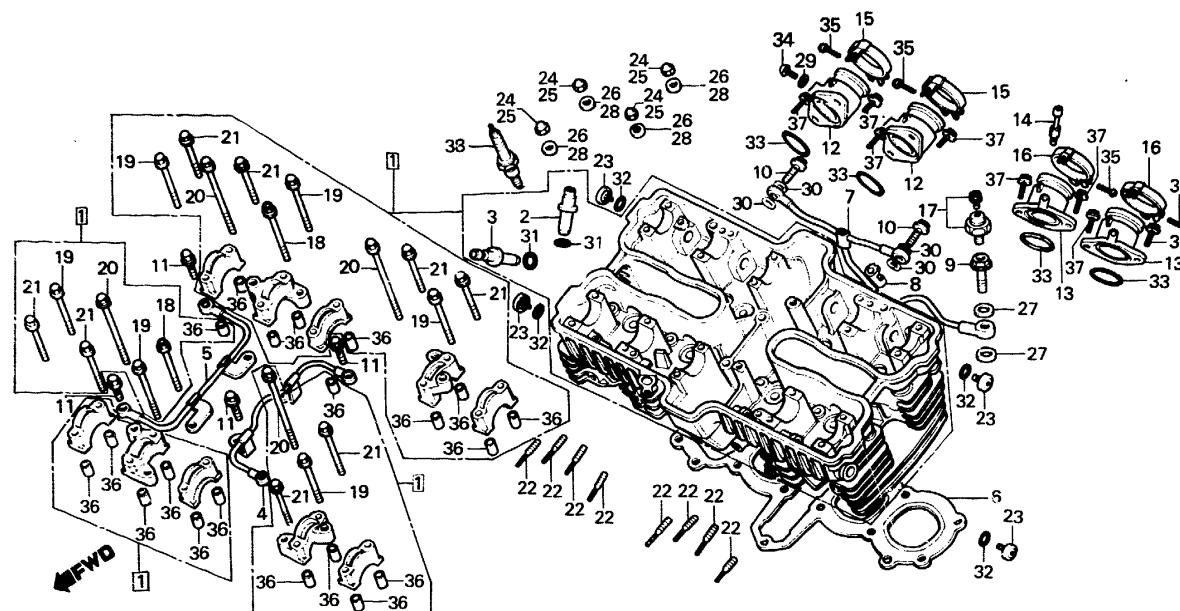

BMA6-3C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		31	91301-200-000	O-RING, 10X1.6	16 16		
		32	91305-MA6-000	O-RING, 13.4X2.1	4 4		
		33	91306-MA6-003	O-RING, 31.7X2.4 (ARAI)	4 4		
			91306-MA6-005	O-RING, 31.7X2.4 (NIPPON)	4 4		
		34	93500-05008-0A	SCREW, PAN, 5X8	3 3		
		35	93500-05020-0G	SCREW, PAN, 5X20	4 4		
		36	94301-08140	PIN, DOWEL, 8X14	20 20		
		37	96000-06018-00	BOLT, FLANGE, 6X18	8 8		
		38	98061-57616	PLUG, SPARK (DPR7Z NGK)	4 4		
			98061-57626	PLUG, SPARK (X22GPR-U ND)	4 4		
			98061-58616	PLUG, SPARK (DPR8Z NGK)	4 4		
			98061-58626	PLUG, SPARK (X24GPR-U ND)	4 4		
			98061-59616	PLUG, SPARK (DPR9Z NGK)	4 4		
			98061-59626	PLUG, SPARK (X27GPR-U ND)	4 4		

C 7

E-4


Cylinder

Cylindre

Zylinder

Cilindro

FWD

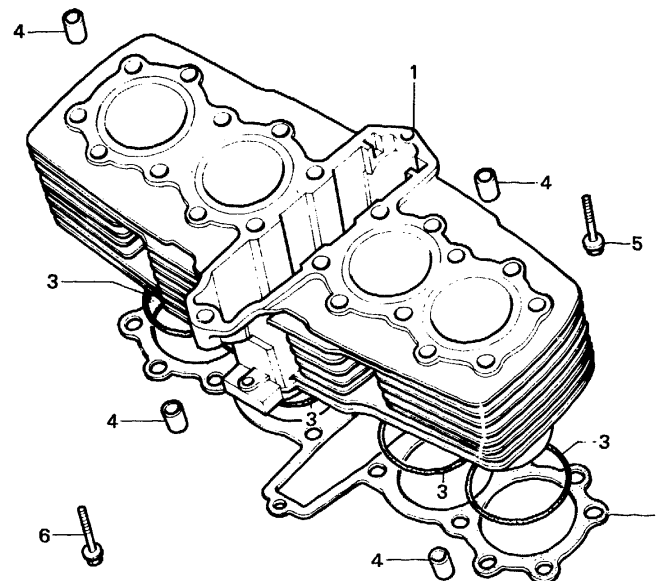

BMA6--4

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No.		Serial No.	Area code
					CBX400	Fc F2c		
CYLINDER COMP. GASKET, CYLINDER	3.1	1	12100-MA6-000	CYLINDER COMP.	1	1		
	3.0	2	12191-MA6-000	GASKET, CYLINDER	1	1		
		3	91304-MA6-000	O-RING, 61X2	4	4		
		4	94301-10160	PIN, DOWEL, 10X16	4	4		
		5	95700-06032-00	BOLT, FLANGE, 6X32	1	1		
		6	95700-08040-00	BOLT, FLANGE, 8X40	1	1		


E-5

Camshaft • Valve

Arbre à cames • Soupape

Nockenwelle • Ventil

Arbol de levas • Válvula

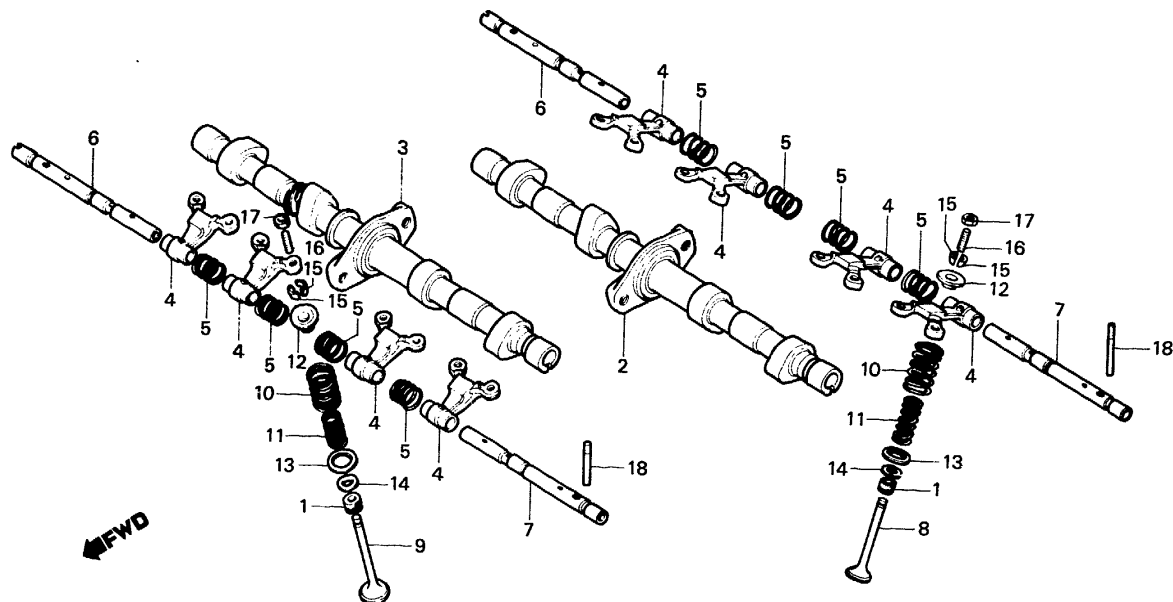

BMA6-5

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
CAMSHAFT COMP., IN.	1.2	1	12209-MA6-005	SEAL, VALVE STEM	16 16		
CAMSHAFT COMP., EX.	1.1	2	14101-MA6-010	CAMSHAFT COMP., IN.	1 1		
SHAFT COMP., R. ROCKER ARM (ADD 0.3 FOR EACH.)	1.3	3	14201-MA6-010	CAMSHAFT COMP., EX.	1 1		
(INC. RELATIVE PART)		4	14431-MA6-000	ARM, VALVE ROCKER	8 8		
VALVE	2.7	5	14435-MA6-000	SPRING, VALVE ROCKER ARM	8 8		
(ADD 0.2 FOR EACH.)		6	14440-MA6-000	SHAFT COMP., R. ROCKER ARM	2 2		
(INC. REFACING)		7	14444-MA6-000	SHAFT COMP., L. ROCKER ARM	2 2		
(EXC. VALVE GUIDE REPLACEMENT)		8	14711-MA6-000	VALVE, IN.	8 8		
SPRING, VALVE INNER	2.6	9	14721-MA6-000	VALVE, EX.	8 8		
(ADD 0.1 FOR EACH.)		10	14751-MA6-000	SPRING, VALVE OUTER	16 16		
(INC. RELATIVE PART)		11	14761-MA6-000	SPRING, VALVE INNER	16 16		
		12	14771-MA6-000	RETAINER, VALVE SPRING	16 16		
		13	14775-MA6-000	SEAT, VALVE SPRING OUTER	16 16		




E-5

Camshaft • Valve

Arbre à cames • Soupape

Nockenwelle • Ventil

Arbol de levas • Válvula

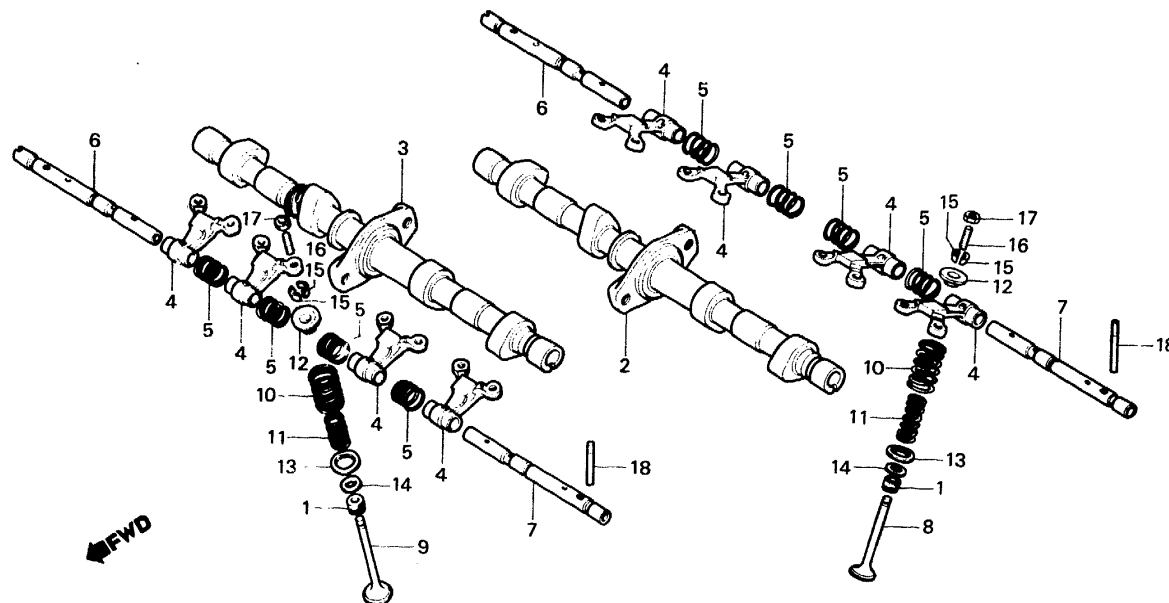

BMA6-5

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		14	14776-MA6-000	SEAT, VALVE SPRING INNER	16 16		
		15	14781-MA6-000	COTTER, VALVE	32 32		
		16	90012-333-000	SCREW, TAPPET ADJUSTING	16 16		
		17	90206-246-000	NUT, TAPPET ADJUSTING	16 16		
		18	90701-MA6-010	PIN, ROCKER ARM SHAFT SETTING	4 4		

C 10


E-6

Cam chain • Tensioner

Chaîne de cames • Tendeur

Steuerkette • Spanner

Cadena de levas • Tensionador

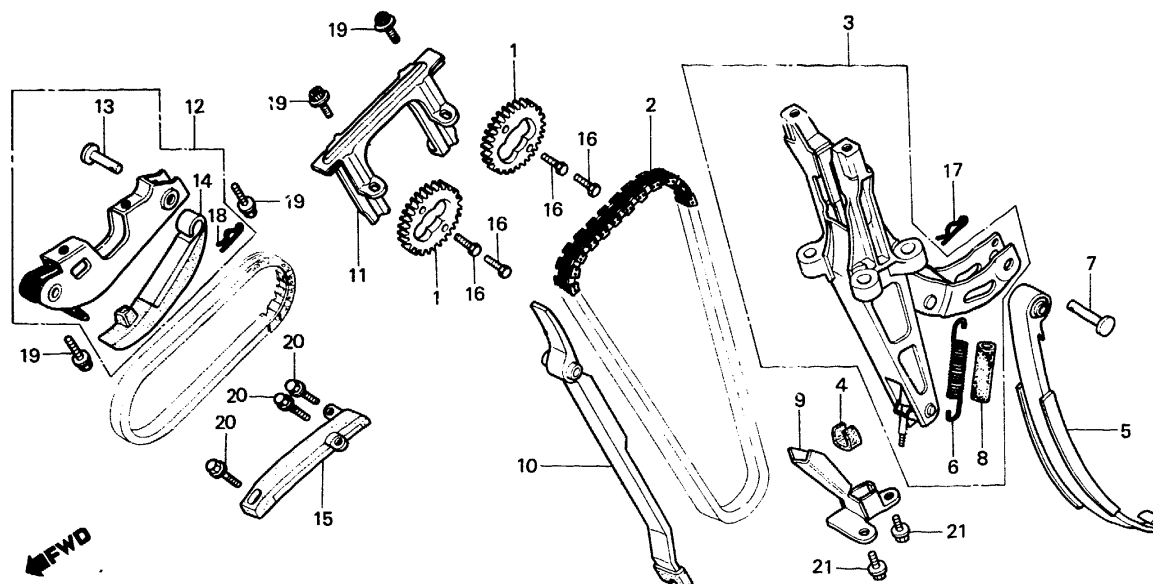

BMA6-6B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CbX400 Fc F2c	Serial No.	Area code
SPROCKET, CAM (ADD 0.1 FOR EACH.)	1.1	1	14322-MA6-000	SPROCKET, CAM	2 2		
CHAIN, CAM	*6.5	2	14401-MA6-000	CHAIN, CAM	1 1		
BRACKET COMP., TENSIONER	1.3	3	14500-MA6-000	BRACKET COMP., TENSIONER	1 1		
• SLIPPER, CAM CHAIN TENSIONER		4	14501-MA6-000	DAMPER, TENSIONER	1 1		
PLATE, CAM CHAIN TENSIONER DAMPER SETTING	*4.6	5	14510-MA6-000	SLIPPER, CAM CHAIN TENSIONER	1 1		
GUIDE A, CAM CHAIN	2.5	6	14514-MA6-000	SPRING, TENSIONER	1 1		
GUIDE B, CAM CHAIN	0.5	7	14531-MA6-000	PIN A, CAM CHAIN TENSIONER ARM	1 1		
TENSIONER ASSY., PRIMARY CHAIN	*4.9	8	14539-MA6-000	TUBE, TENSIONER SPRING	1 1		
GUIDE, PRIMARY CHAIN LOWER	*4.5	9	14540-MA6-000	PLATE, CAM CHAIN TENSIONER DAMPER SETTING	1 1		
		10	14620-MA6-000	GUIDE A, CAM CHAIN	1 1		
		11	14630-MA6-000	GUIDE B, CAM CHAIN	1 1		
		12	23130-MA6-000	TENSIONER ASSY., PRIMARY CHAIN	1 1		
		13	23136-MA6-000	PIN, PRIMARY TENSIONER	1 1		
		14	23137-MA6-000	TENSIONER, PRIMARY CHAIN	1 1		

C 11


E-6

Cam chain • Tensioner

Chaîne de cames • Tendeur

Steuerkette • Spanner

Cadena de levas • Tensionador

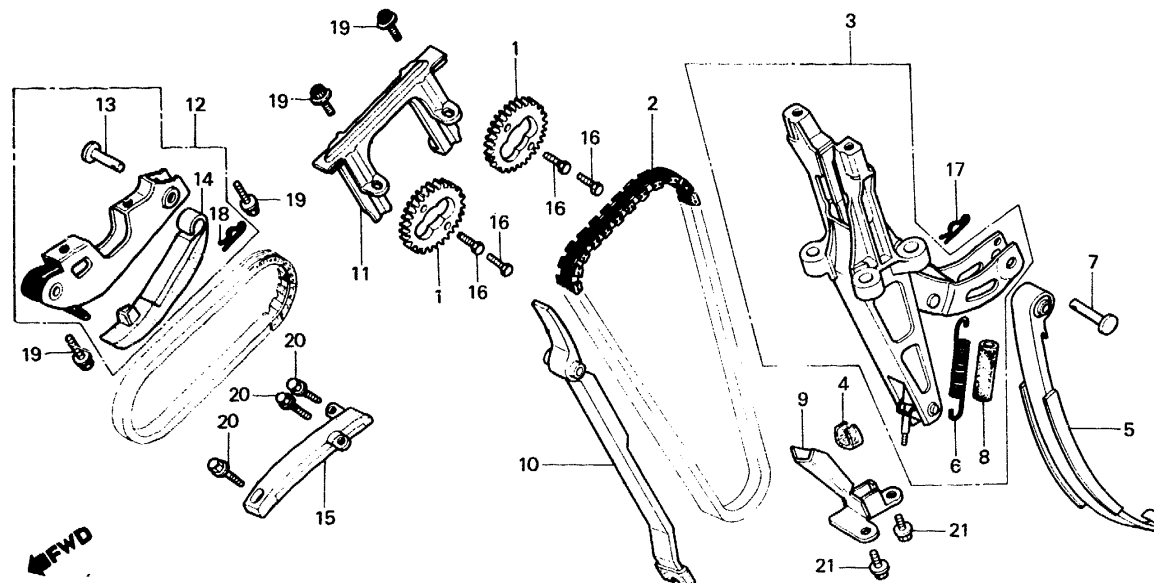

BMA6-6B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		15	23166-MA6-000	GUIDE, PRIMARY CHAIN LOWER	1 1		
		16	90086-413-000	BOLT, HEX. KNOCK, 7X12	4 4		
		17	94251-06000	PIN, LOCK, 6MM	1 1		
		18	94251-08000	PIN, LOCK, 8MM	1 1		
		19	95700-06014-00	BOLT, FLANGE, 6X14	4 4		
		20	96000-06014-00	BOLT, FLANGE, 6X14	3 3		
		21	96000-06016-00	BOLT, FLANGE, 6X16	2 2		

C 12


E-7

Clutch cover

Couvercle d'embrayage

Kupplungsdeckel

Cubierta de embrague

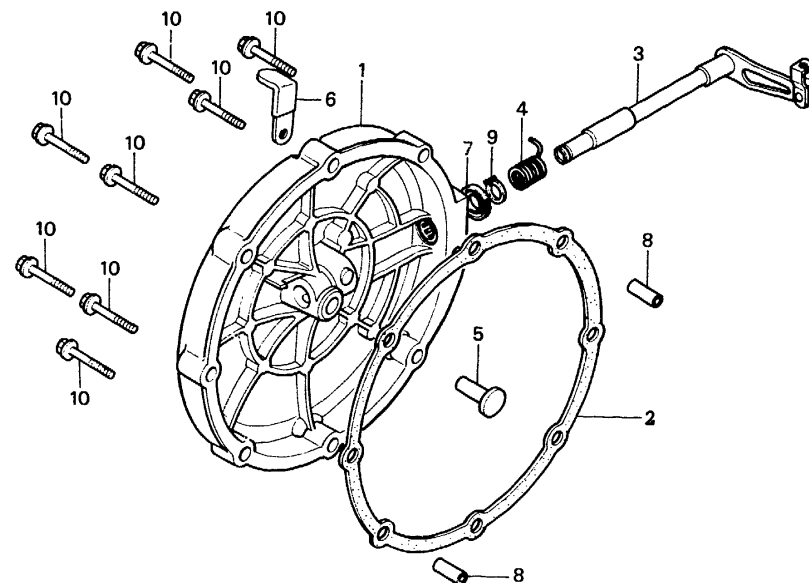

BMA6-7

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
COVER COMP., CLUTCH	0.5	1	11330-MA6-000	COVER COMP., CLUTCH	1 1	1022077 1022078	
LEVER COMP., CLUTCH		2	11396-MA6-000	GASKET, CLUTCH COVER	1 1		
(INC. RELATIVE PART)		3	22710-MA6-000	LEVER COMP., CLUTCH	1 1		
GASKET, CLUTCH COVER	0.4		22710-MA7-000	LEVER COMP., CLUTCH	1 1		
		4	22815-413-000	SPRING, CLUTCH LEVER	1 1		
		5	22847-415-000	ROD, CLUTCH LIFTER	1 1		
		6	32111-323-000	CLAMPER, CORD	1 1		
		7	91201-MA6-000	OIL SEAL, 12X18X3	1 1		
		8	94301-08140	PIN, DOWEL, 8X14	2 2		
		9	94510-10000	CIRCLIP, EXTERNAL, 10MM	1 1		
		10	96000-06028-00	BOLT, FLANGE, 6X28	8 8		

C 13


E-8

Clutch

Embrayage

Kupplung

Embrague

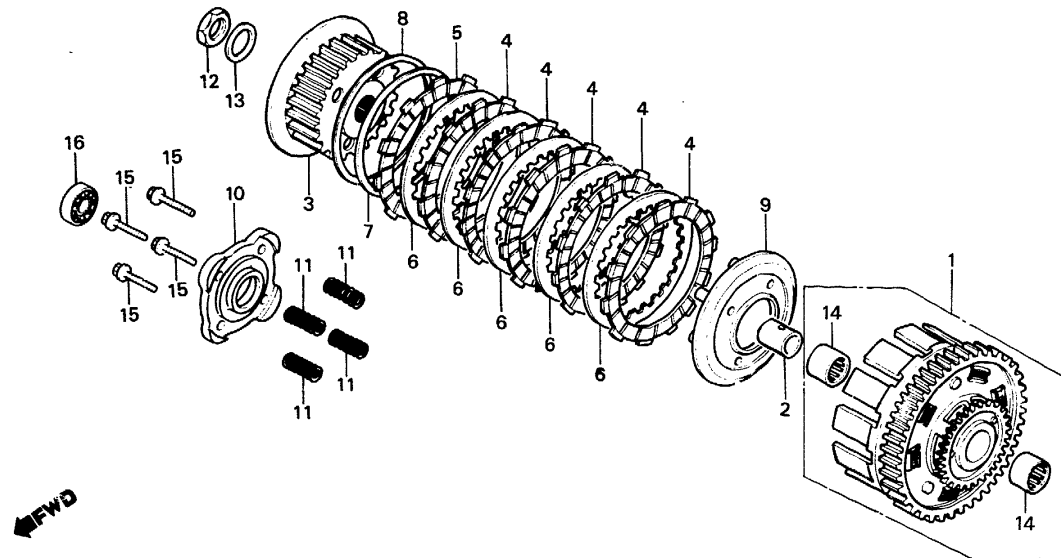

BMA6-8B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
OUTER COMP., CLUTCH	*4.9	1	22100-MA6-000	OUTER COMP., CLUTCH	1 1	1020454	
CENTER COMP., CLUTCH	0.7		22100-MA6-010	22100-MA6-010			
•DISK, CLUTCH FRICTION (INC. RELATIVE PART) (ONE OR ALL)		2	22118-MA6-000	OUTER COMP., CLUTCH	1 1	1020455	
		3	22120-MA6-000	COLLAR, 22X28X33	1 1		
		4	22201-MA6-000	CENTER COMP., CLUTCH	1 1		
•PLATE, CLUTCH PRESSURE SPRING, CLUTCH (ONE OR ALL)	0.5			DISK, CLUTCH FRICTION	6 6	1022077	
		5	22201-MA7-000	DISK, CLUTCH FRICTION	5 5	1022078	
		6	22321-374-000	PLATE, CLUTCH	1 1	1022078	
		7	22325-426-003	SPRING, CLUTCH PLATE	1 1	1022078	
		8	22326-426-003	SEAT, JUDDER SPRING	1 1		
		9	22350-MA6-000	PLATE, CLUTCH PRESSURE	1 1		
		10	22361-MA6-000	PLATE, CLUTCH LIFTER	1 1		
		11	22401-MA6-000	SPRING, CLUTCH	4 4		
		12	90235-444-000	NUT, HEX., 18MM	1 1		
		13	90432-428-000	WASHER, LOCK	1 1		
		14	91005-MA6-003	BEARING, NEEDLE, 28X35X16	2 2		

C 14


E-8

Clutch

Embrayage

Kupplung

Embrague

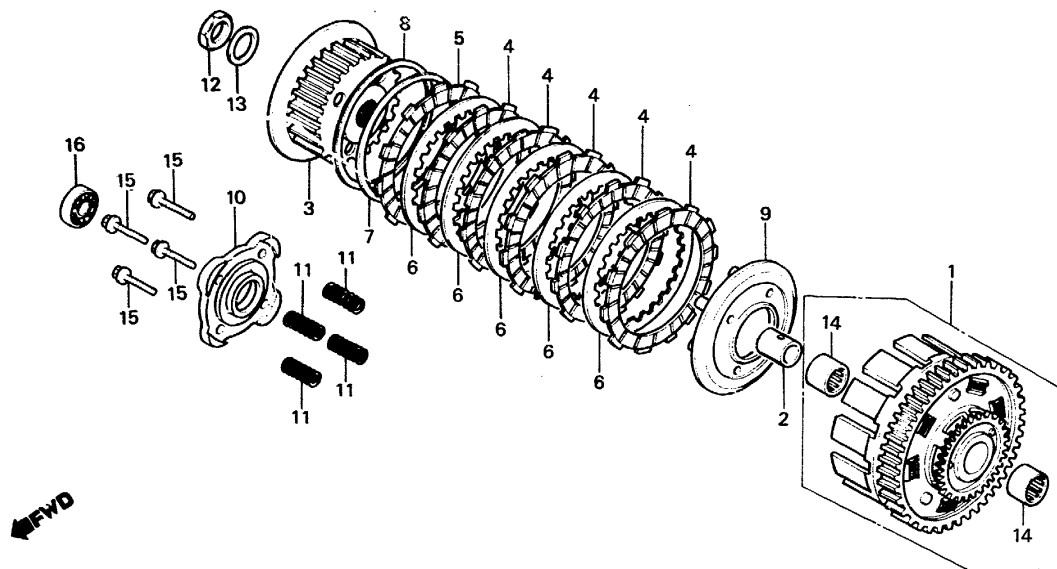

BMA6-8B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		15	95920-06020-08	BOLT, FLANGE, 6X20	4 4		
		16	96100-60000-00	BEARING, RADIAL BALL, 6000	1 1		

C 15


E-9

Generator • Dynamo cover

Générateur • Couvercle générateur

Lichtmaschine • Dynamodeckel

Generador • Cubierta de generador

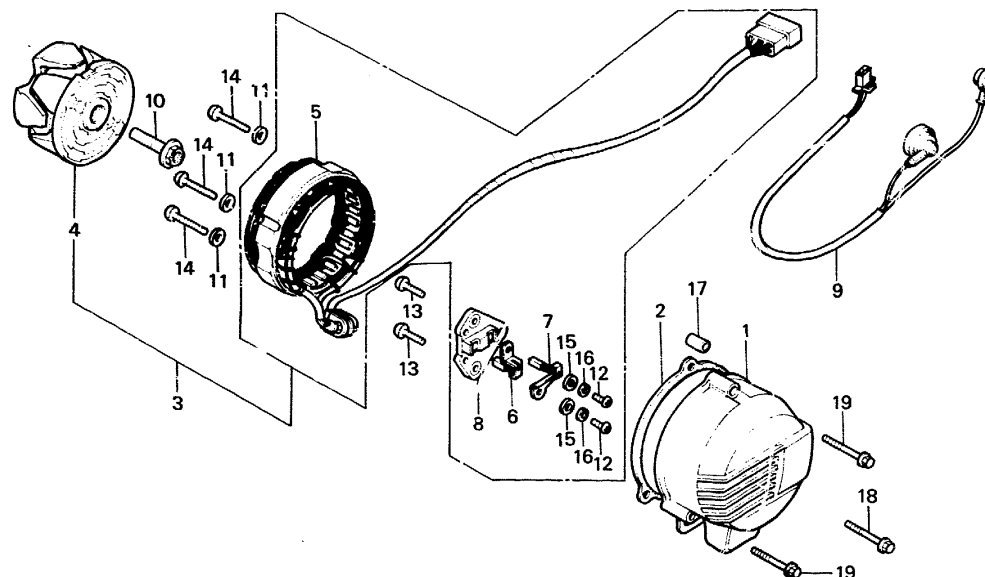

BMA6-9A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
COVER, A.C. GENERATOR	0.3	1	11341-MA6-000	COVER, A.C. GENERATOR	1 1		
• ROTOR COMP.		2	11395-MA6-000	GASKET, A.C. GENERATOR COVER	1 1		
GASKET, A.C. GENERATOR COVER	0.1	3	31100-MA6-005	GENERATOR ASSY., A.C.	1 1		
GENERATOR ASSY., A.C.	0.5			(HITACHI)			
STATOR COMP.	0.4	4	31110-422-613	ROTOR COMP. (HITACHI)	1 1		
• BRUSH COMP.		5	31120-MA6-005	STATOR COMP. (HITACHI)	1 1		
(ONE OR ALL)		6	31124-422-005	BRUSH COMP. A	1 1		
		7	31125-422-005	BRUSH COMP. B	1 1		
		8	31126-MA6-000	BASE, BRUSH	1 1		
		9	32106-MA6-000	HARNESS F, SUB WIRE	1 1		
		10	90023-MA6-000	BOLT, FLANGE, 12X45	1 1		
		11	90563-304-000	WASHER, NUMBER PLATE MOUNTING	3 3		
		12	93500-04012-0H	SCREW, PAN, 4X12	2 2		
		13	93500-06016	SCREW, PAN, 6X16	2 2		
		14	93500-06032-0A	SCREW, PAN, 6X32	3 3		
		15	94101-04800	WASHER, PLAIN, 4MM	2 2		

C 16


E-9

Generator • Dynamo cover

Générateur • Couvercle générateur

Lichtmaschine • Dynamodeckel

Generador • Cubierta de generador

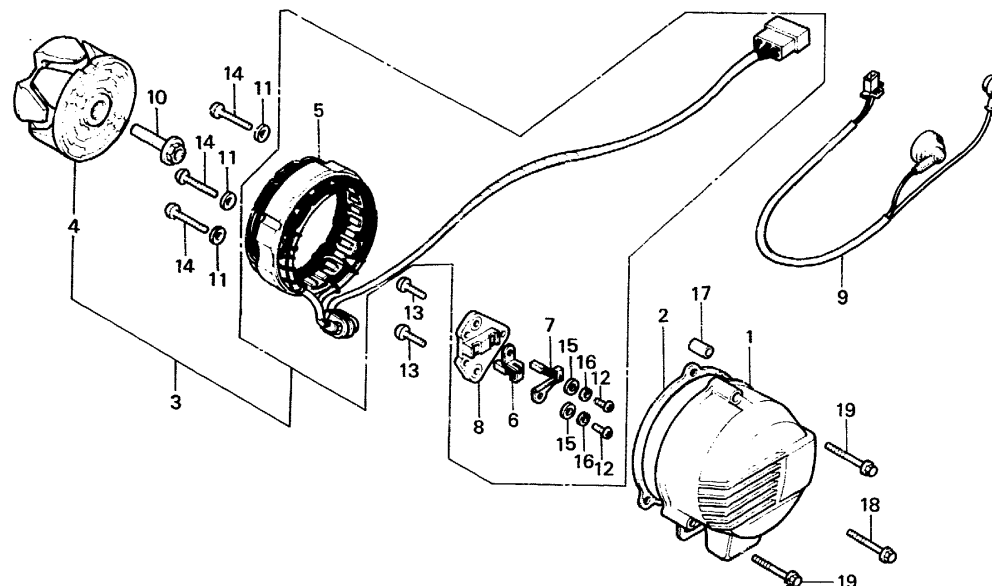

BMA6-9A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		16	94111-04800	WASHER, SPRING, 4MM	2 2		
		17	94301-08140	PIN, DOWEL, 8X14	1 1		
		18	96000-06040-00	BOLT, FLANGE, 6X40	1 1		
		19	96000-06045-00	BOLT, FLANGE, 6X45	2 2		

D 1


E-10

Starter motor

Moteur démarrage

Anlassermotor

Motor de arranque

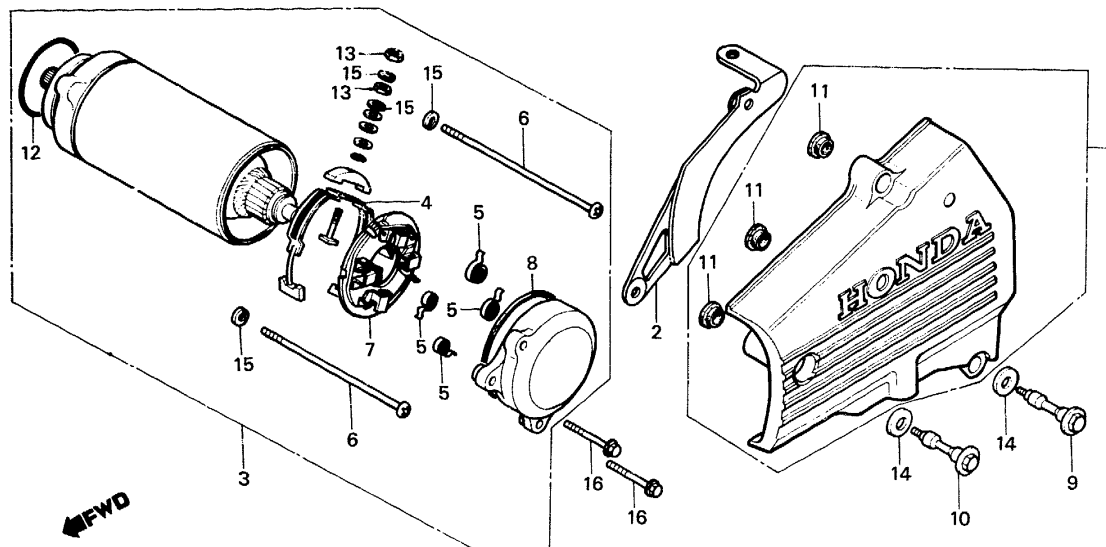

BMA6-10

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
COVER COMP., L. RR.	0.1	1	11360-MA6-000	COVER COMP., L. RR.	1 1		
MOTOR ASSY., STARTER	0.2	2	11365-MA6-000	PROTECTOR, CASE	1 1		
TERMINAL SET, BRUSH	0.4	3	31200-MA6-008	MOTOR ASSY., STARTER	1 1		
		4	31201-MA6-000	TERMINAL SET, BRUSH	1 1		
		5	31204-MA6-000	SPRING, CARBON BRUSH	4 4		
		6	31205-MA6-000	BOLT, SETTING	2 2		
		7	31206-MA6-000	HOLDER SET, BRUSH	1 1		
		8	31207-179-711	RING, SEAL	1 1		
		9	90013-MA6-000	BOLT, SPECIAL, 6X46.4	2 2		
		10	90014-MA6-000	BOLT, SPECIAL, 6X52.7	1 1		
		11	90542-MA6-000	BUSH, MOUNTING	3 3		
		12	91309-MA6-000	O-RING	1 1		
		13	94002-06000	NUT, HEX., 6MM	2 2		
		14	94102-10770	WASHER, PLAIN, 10MM	3 3		
		15	94111-06000	WASHER, SPRING, 6MM	4 4		
		16	95700-06025-08	BOLT, FLANGE, 6X25	2 2		

D 2


E-11

Pulse generator

Générateur d'impulsions

Impulsgenerator

Generador de impulso

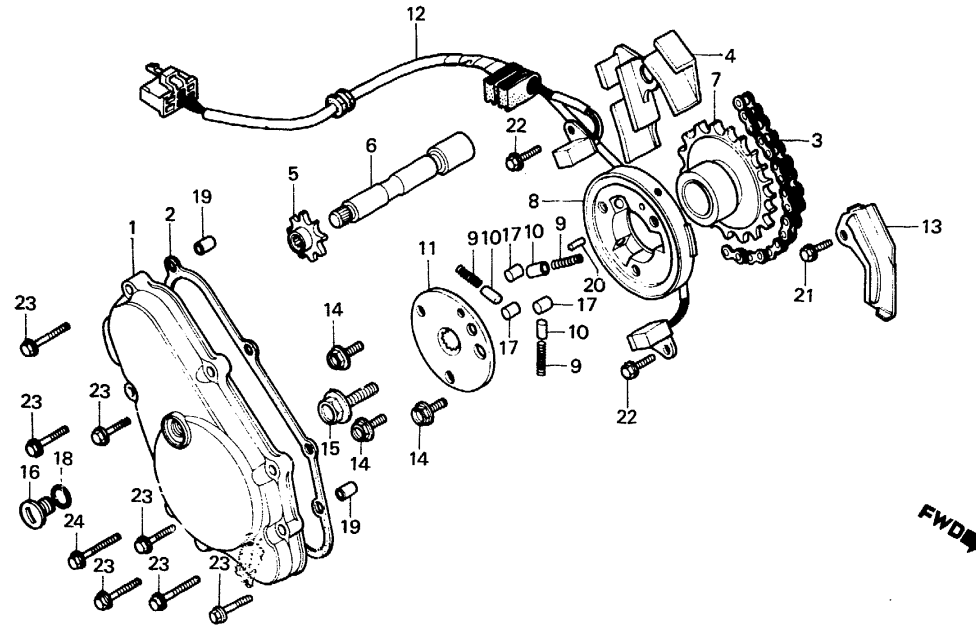

BMA6-11

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
COVER, STARTER	0.3	1	11631-MA6-000	COVER, STARTER	1 1		
• GASKET, STARTER COVER		2	11691-MA6-000	GASKET, STARTER COVER	1 1		
CHAIN, STARTING	0.4	3	28101-MA6-003	CHAIN, STARTING	1 1		
• GUIDE, STARTER CHAIN		4	28103-MA6-000	GUIDE, STARTER CHAIN	1 1		
• SHAFT COMP., STARTER		5	28105-MA6-000	SPROCKET, STARTER DRIVE	1 1		
• SPROCKET COMP., STARTING		6	28106-MA6-000	SHAFT COMP., STARTER	1 1		
• CAP, STARTING CLUTCH ROLLER	CLUTCH	7	28110-MA6-000	SPROCKET COMP., STARTING	1 1		
	SPRING						
(INC. RELATIVE PART) (ONE OR ALL)		8	28120-MA6-620	OUTER, STARTING CLUTCH	1 1		
OUTER, STARTING CLUTCH	0.5	9	28125-426-000	SPRING, STARTING CLUTCH ROLLER	3 3		
(INC. RELATIVE PART)		10	28126-323-000	CAP, STARTING CLUTCH ROLLER	3 3		
• GENERATOR ASSY., PULSE							
		11	28130-MA6-000	FLANGE, STARTER DRIVE	1 1		
		12	30300-MA6-003	GENERATOR ASSY., PULSE (TOYO)	1 1		

D 3


E-11

Pulse generator

Générateur d'impulsions

Impulsgenerator

Generador de impulso

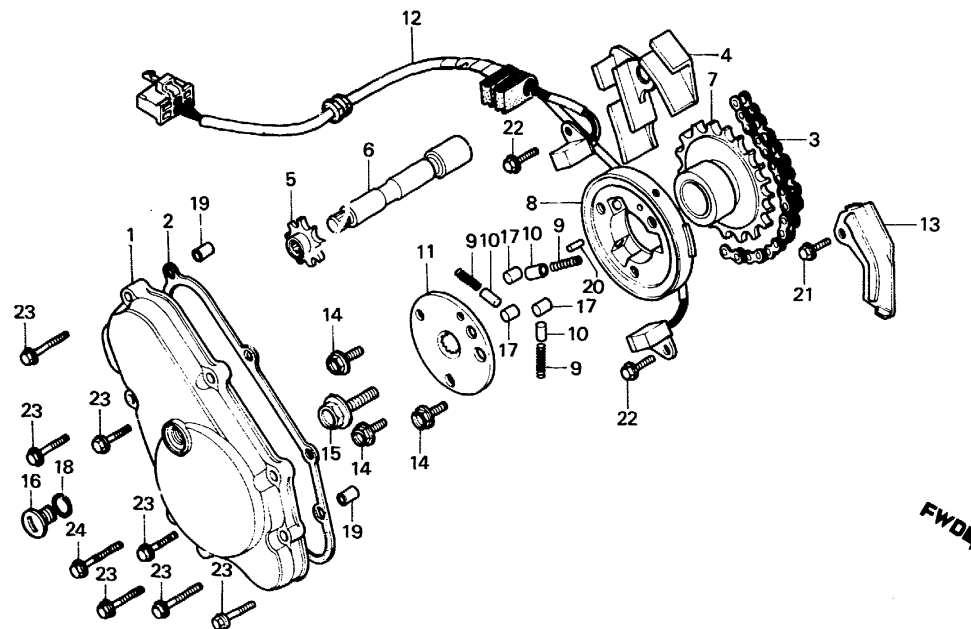

BMA6-11

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
			30300-MA6-005	GENERATOR ASSY., PULSE (HITACHI)	1 1		
		13	30312-MA6-000	PLATE, PULSER CORD SETTING	1 1		
		14	90022-425-000	BOLT, FLANGE, 8X16	3 3		
		15	90024-MA6-000	BOLT, FLANGE, 8X25	1 1		
		16	90084-471-000	CAP, A.C. GENERATOR	1 1		
		17	91101-377-000	ROLLER, 10.2X11.5	3 3		
		18	91303-377-000	O-RING, 13.8X2.5	1 1		
		19	94301-08140	PIN, DOWEL, 8X14	2 2		
		20	94305-40102	PIN, SPRING, 4X10	1 1		
		21	96000-06012-00	BOLT, FLANGE, 6X12	1 1		
		22	96000-06016-00	BOLT, FLANGE, 6X16	2 2		
		23	96000-06028-00	BOLT, FLANGE, 6X28	7 7		
		24	96000-06035-00	BOLT, FLANGE, 6X35	1 1		

D 4

E-12


Oil pump

Pompe à huile

Ölpumpe

Bomba de aceite

FWD

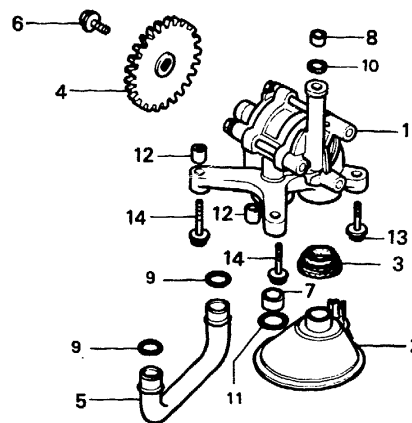


BMA6-12C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
PUMP ASSY., OIL	*4.8	1	15100-MA6-000	PUMP ASSY., OIL	1 1		
STRAINER, OIL	0.8	2	15153-MA6-000	STRAINER, OIL	1 1		
PIPE, OIL PATH		3	15154-MA6-000	PACKING, OIL STRAINER	1 1		
GEAR, OIL PUMP DRIVEN	*4.6	4	15215-MA6-000	GEAR, OIL PUMP DRIVEN	1 1		
		5	15311-MA6-000	PIPE, OIL PATH	1 1		
		6	90026-MA6-000	BOLT, FLANGE, 6X14	1 1		
		7	91105-MA6-000	PIN, GUIDE, 13X8.5	1 1		
		8	91106-MA6-000	PIN, GUIDE, 11.5X9	1 1		
		9	91308-MA6-005	O-RING, 14.6X3.6	2 2		
		10	91310-MA6-003	O-RING, 11.0X2.5X4	1 1		
		11	91316-MA6-005	O-RING, 13X2.4	1 1		
		12	94301-08140	PIN, DOWEL, 8X14	2 2		
		13	95700-06022-00	BOLT, FLANGE, 6X22	1 1		
		14	95700-06032-00	BOLT, FLANGE, 6X32	2 2		

D 5

Oil filter • Oil pan

Ölfilter • Oelwanne

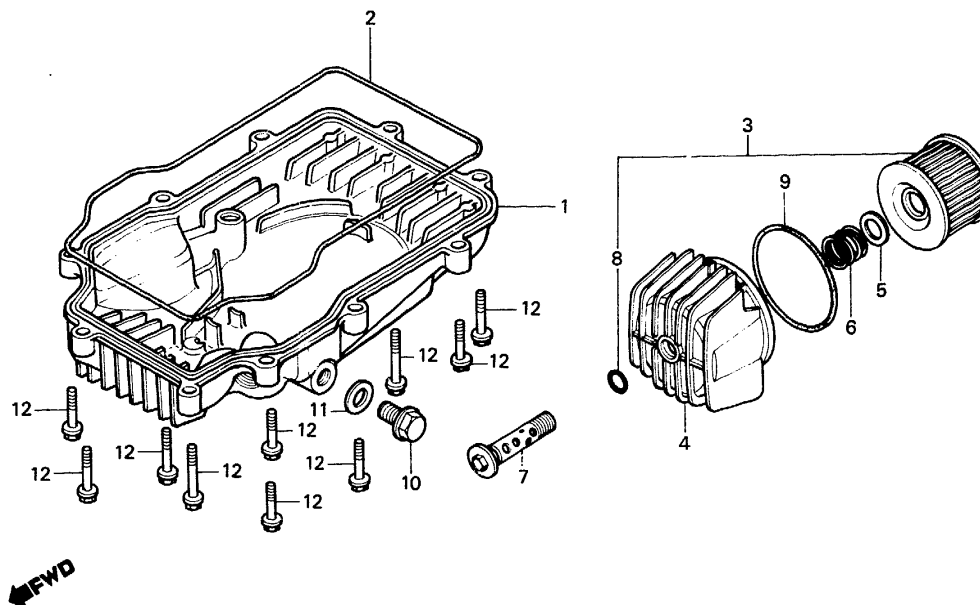Filtro de aceite • Cáster del aceite64

D 6


E-14

Crankcase

Carter moteur

Kurbelgehäuse

Cárter de motor

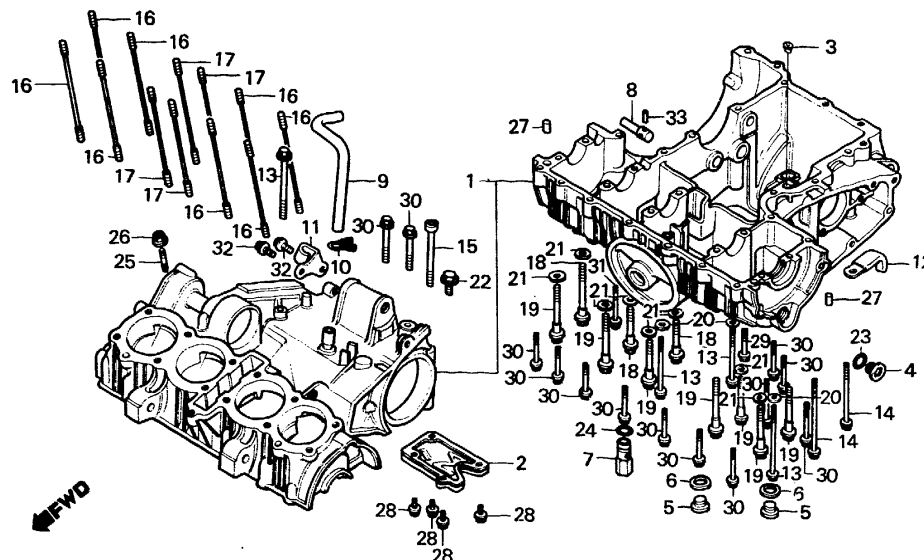

BMA6-14D

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
CRANKCASE SET	*8.3	1	11000-MA6-000	CRANKCASE SET	1 1		
PLATE COMP., BREATHER	*4.8	2	11110-MA6-000	PLATE COMP., BREATHER	1 1		
VALVE ASSY., RELIEF	0.9	3	11205-MA6-000	ORIFICE, OIL CONTROL	1 1		
		4	11208-426-000	PLUG B, OIL PATH	2 2		
		5	12206-371-305	BOLT, SEALING, 18MM	2 2		
		6	12207-611-300	WASHER, SEALING BOLT	2 2		
		7	15220-MA6-000	VALVE ASSY., RELIEF	1 1		
		8	15710-MA6-000	NOZZLE, CHAIN OIL FEED	1 1		
		9	15761-MA6-000	TUBE, BREATHER	1 1		
		10	18534-634-670	CLIP, AIR HOSE, 16	1 1		
		11	22821-MA6-000	RECEIVER, CLUTCH CABLE	1 1		
		12	32111-323-000	CLAMPER, CORD	1 1		
		13	90020-MA6-000	BOLT, FLANGE, 6X105	4 4		
		14	90021-MA6-000	BOLT, FLANGE, 6X120	2 2		
		15	90025-MA6-000	BOLT, SOCKET, 8X80	1 1		


E-14

Crankcase

Carter moteur

Kurbelgehäuse

Cárter de motor

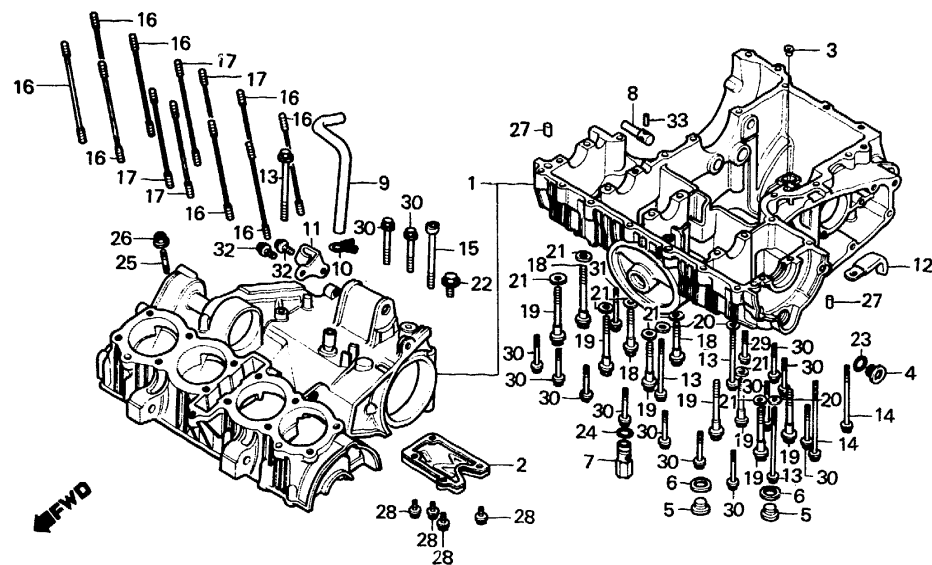

BMA6-14D

Service item	F.R.T.	Ref. No.	Part No.	Description	Regd. No. CBX400 Fc F2c	Serial No.	Area code
		16	90031-MA6-000	BOLT, STUD, 8X147	8 8		
		17	90032-MA6-000	BOLT, STUD, 9X166	4 4		
		18	90041-MA6-000	BOLT, FLANGE, 8X75	3 3		
		19	90042-MA6-000	BOLT, FLANGE, 8X94	7 7		
		20	90441-909-000	WASHER, SEAL, 6MM	3 3		
		21	90457-422-000	WASHER, 8.5MM	10 10	1060786	
		22	90473-MA6-000	BOLT, FLANGE, 12X15	1 1		
		23	91302-377-000	O-RING, 15X2.5	2 2		
		24	91356-MA6-003	O-RING, 14.8X2.4 (ARAI)	1 1		
			91356-MA6-005	O-RING, 14.8X2.4 (NIPPON)	1 1		
		25	92700-06035-08	BOLT, STUD, 6X35	1 1		
		26	94050-06000	NUT, FLANGE, 6MM	1 1		
		27	94302-10160	PIN B, DOWEL, 10X16	2 2		
		28	95700-06012-08	BOLT, FLANGE, 6X12	4 4		
		29	95700-06040-07	BOLT, FLANGE, 6X40	1 1		
		30	95700-06045-00	BOLT, FLANGE, 6X45	13 13		
		31	95700-06060-00	BOLT, FLANGE, 6X60	1 1		

D 8


E-14

Crankcase

Carter moteur

Kurbelgehäuse

Cárter de motor

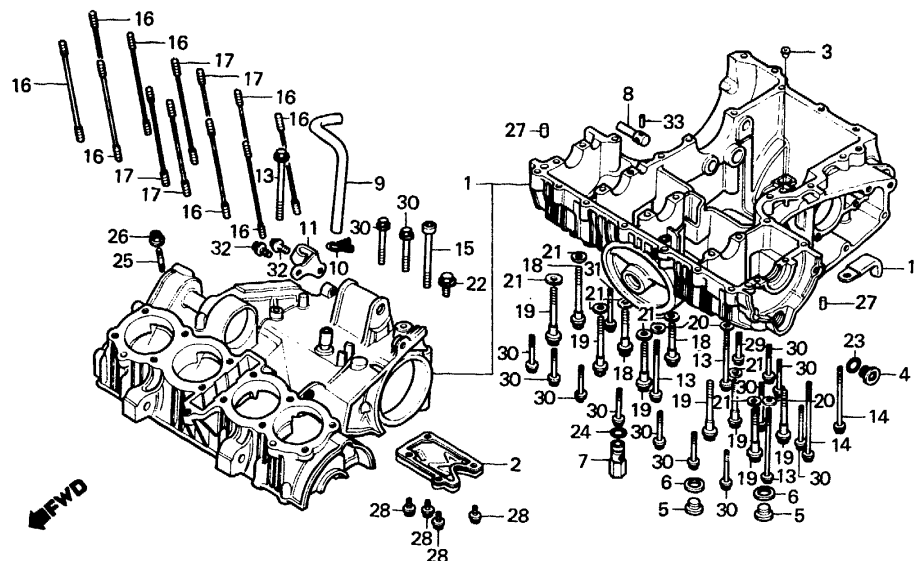

BMA6-14D

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		32	96000-06014-00	BOLT, FLANGE, 6X14	2 2		
		33	96220-40080	ROLLER, 4X8	1 1		


E-15

Crankshaft • Piston

Vilebrequin • Piston

Kurbelwelle • Kolben

Cigüeñal • Pistón

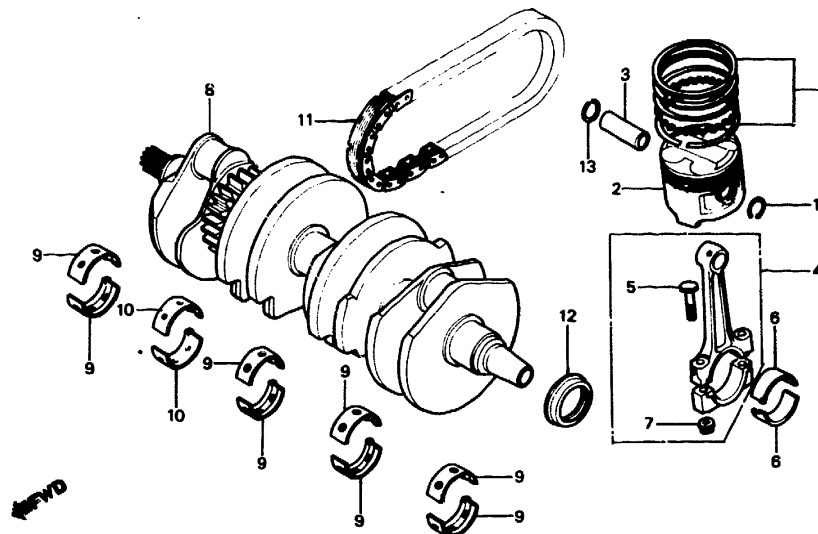

BMA6-15

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
RING SET, PISTON (ADD 0.1 FOR EACH.)	3.2	1	130A1-MA6-004	RING SET, PISTON (STD. RIKEN)	4 4		
• PISTON (ADD 0.1 FOR EACH.)			13021-MA6-004	RING SET, PISTON (0.25)	(4) (4)		
PIN, PISTON	3.1		13031-MA6-004	RING SET, PISTON (0.50)	(4) (4)		
ROD COMP. CONNECTING (# 1,3 SIDE 7,4)	*6.4		13041-MA6-004	RING SET, PISTON (0.75)	(4) (4)		
(ADD 0.3 FOR EACH.)			13051-MA6-004	RING SET, PISTON (1.00)	(4) (4)		
BEARING CONNECTING ROD (ADD 0.3 FOR EACH.)	*5.0	2	13101-MA6-000	PISTON	4 4		
CRANKSHAFT COMP. (ONE OR ALL)	*7.7		13102-MA6-000	PISTON (0.25)	(4) (4)		
CHAIN, PRIMARY	*7.0		13103-MA6-000	PISTON (0.50)	(4) (4)		
OIL SEAL, 30X45X8	*6.5		13104-MA6-000	PISTON (0.75)	(4) (4)		
	*4.7		13105-MA6-000	PISTON (1.00)	(4) (4)		
		3	13111-MA6-000	PIN, PISTON	4 4		
		4	13201-MA6-000	ROD COMP. A, CONNECTING	4 4		
			13202-MA6-000	ROD COMP. B, CONNECTING	4 4		
			13203-MA6-000	ROD COMP. C, CONNECTING	4 4		
			13204-MA6-000	ROD COMP. D, CONNECTING	4 4		
			13205-MA6-000	ROD COMP. E, CONNECTING	4 4		
		5	13213-MA6-000	BOLT, CONNECTING ROD	8 8		

Connecting rod bearing selection
(Oil clearance 24~57μm)

Connecting rod I.D. 330	Crank pin O.D. 300	A	B	C
		0 -0.008	-0.008 -0.016	-0.016 -0.024
1	0 +0.008	Yellow	Green	Brown
2	+0.008 +0.016	Green	Brown	Black
3	+0.016 +0.024	Brown	Black	Blue


E-15

Crankshaft • Piston

Vilebrequin • Piston

Kurbelwelle • Kolben

Cigüeñal • Pistón

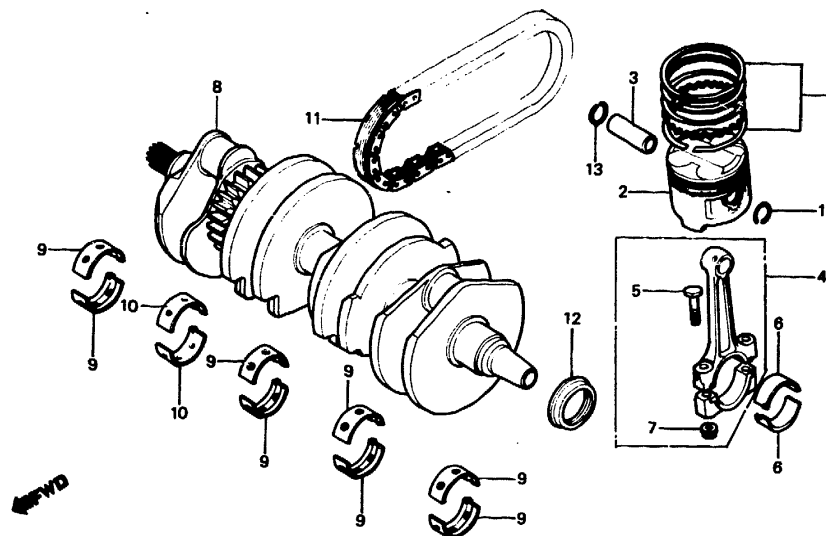

BMA6-15

Service item	F.R.T.	Ref. No.	Part No.	Description	Regd. No. CBX400 Fc F2c	Serial No.	Area code																																									
Crankshaft bearing selection (Oil clearance 24~57μm) <table><tr><th colspan="2">Crankshaft O.D. 320</th><th>1</th><th>2</th><th>3</th><th>4</th></tr><tr><th rowspan="2">Crankcase I.D. 350</th><th>0</th><td>-0.006</td><td>-0.012</td><td>-0.018</td><td>-0.024</td></tr><tr><th>-0.006</th><td>-0.012</td><td>-0.018</td><td>-0.024</td><td>-0.024</td></tr><tr><td>1</td><td>+0.006</td><td>Red</td><td>Pink</td><td>Yellow</td><td>Green</td></tr><tr><td>2</td><td>+0.006 +0.012</td><td>Pink</td><td>Yellow</td><td>Green</td><td>Brown</td></tr><tr><td>3</td><td>+0.012 +0.018</td><td>Yellow</td><td>Green</td><td>Brown</td><td>Black</td></tr><tr><td>4</td><td>+0.018 +0.024</td><td>Green</td><td>Brown</td><td>Black</td><td>Blue</td></tr></table>	Crankshaft O.D. 320		1	2	3	4	Crankcase I.D. 350	0	-0.006	-0.012	-0.018	-0.024	-0.006	-0.012	-0.018	-0.024	-0.024	1	+0.006	Red	Pink	Yellow	Green	2	+0.006 +0.012	Pink	Yellow	Green	Brown	3	+0.012 +0.018	Yellow	Green	Brown	Black	4	+0.018 +0.024	Green	Brown	Black	Blue	6	13214-MA6-000	BEARING A, CONNECTING ROD	(BLUE)	8 8	1028413	
	Crankshaft O.D. 320		1	2	3	4																																										
	Crankcase I.D. 350	0	-0.006	-0.012	-0.018	-0.024																																										
		-0.006	-0.012	-0.018	-0.024	-0.024																																										
	1	+0.006	Red	Pink	Yellow	Green																																										
	2	+0.006 +0.012	Pink	Yellow	Green	Brown																																										
	3	+0.012 +0.018	Yellow	Green	Brown	Black																																										
	4	+0.018 +0.024	Green	Brown	Black	Blue																																										
	13215-MA6-000	BEARING B, CONNECTING ROD	(BLACK)	8 8	1028413																																											
	13216-MA6-000	BEARING C, CONNECTING ROD	(BROWN)	8 8	1028413																																											
13217-MA6-000	BEARING D, CONNECTING ROD	(GREEN)	8 8	1028413																																												
13218-MA6-000	BEARING E, CONNECTING ROD	(YELLOW)	8 8	1028413																																												
13214-MA6-010	BEARING A, CONNECTING ROD	(BLUE)	8 8	1028414																																												
13215-MA6-010	BEARING B, CONNECTING ROD	(BLACK)	8 8	1028414																																												
13216-MA6-010	BEARING C, CONNECTING ROD	(BROWN)	8 8	1028414																																												
13217-MA6-010	BEARING D, CONNECTING ROD	(GREEN)	8 8	1028414																																												
13218-MA6-010	BEARING E, CONNECTING ROD	(YELLOW)	8 8	1028414																																												
	7	13214-410-003	NUT, CONNECTING ROD		8 8																																											

1985.02.20E D10

D 11


E-15

Crankshaft • Piston

Vilebrequin • Piston

Kurbelwelle • Kolben

Cigüeñal • Pistón

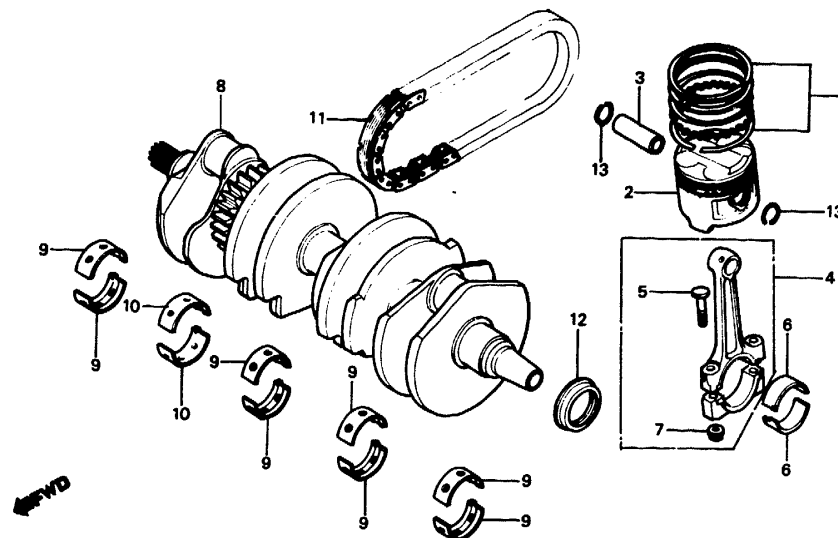

BMA6-15

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		8	13300-MA6-000	CRANKSHAFT COMP.	1 1	1042685	
			13300-MA6-010	CRANKSHAFT COMP.	1 1	1042686	
		9	13315-MA6-003	BEARING A, MAIN (BLUE DAIDO)	8 8		
			13315-MA6-004	BEARING A, MAIN (BLUE TAIHO)	8 8		
			13316-MA6-003	BEARING B, MAIN (BLACK DAIDO)	8 8		
			13316-MA6-004	BEARING B, MAIN (BLACK TAIHO)	8 8		
			13317-MA6-003	BEARING C, MAIN (BROWN DAIDO)	8 8		
			13317-MA6-004	BEARING C, MAIN (BROWN TAIHO)	8 8		
			13318-MA6-003	BEARING D, MAIN (GREEN DAIDO)	8 8		
			13318-MA6-004	BEARING D, MAIN (GREEN TAIHO)	8 8		
			13319-MA6-003	BEARING E, MAIN (YELLOW DAIDO)	8 8		

D 12


E-15

Crankshaft • Piston

Vilebrequin • Piston

Kurbelwelle • Kolben

Cigüeñal • Pistón

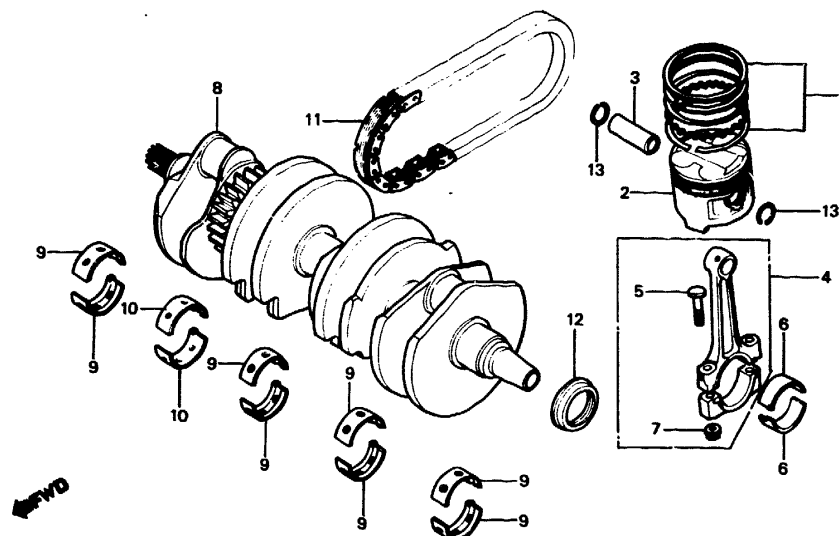

BMA6-15

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
			13319-MA6-004	BEARING E, MAIN (YELLOW TAIHO)	8 8		
			13320-MA6-003	BEARING F, MAIN (PINK DAIDO)	8 8		
			13320-MA6-004	BEARING F, MAIN (PINK TAIHO)	8 8		
			13321-MA6-003	BEARING G, MAIN (RED DAIDO)	8 8		
			13321-MA6-004	BEARING G, MAIN (RED TAIHO)	8 8		
		10	13325-MA6-003	BEARING A, MAIN (BLUE DAIDO)	2 2		
			13325-MA6-004	BEARING A, MAIN (BLUE TAIHO)	2 2		
			13326-MA6-003	BEARING B, MAIN (BLACK DAIDO)	2 2		
			13326-MA6-004	BEARING B, MAIN (BLACK TAIHO)	2 2		
			13327-MA6-003	BEARING C, MAIN (BROWN DAIDO)	2 2		

D 13


E-15

Crankshaft • Piston

Vilebrequin • Piston

Kurbelwelle • Kolben

Cigüeñal • Pistón

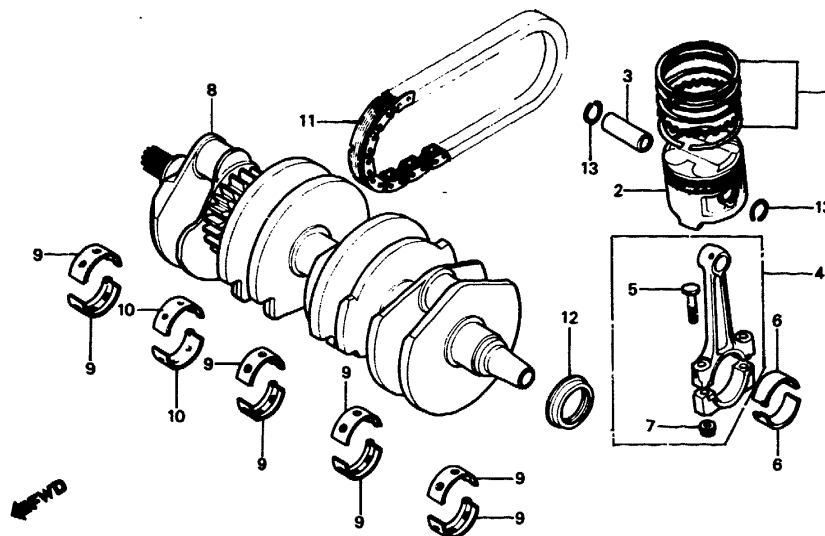

BMA6-15

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
			13327-MA6-004	BEARING C, MAIN (BROWN TAIHO)	2 2		
			13328-MA6-003	BEARING D, MAIN (GREEN DAIDO)	2 2		
			13328-MA6-004	BEARING D, MAIN (GREEN TAIHO)	2 2		
			13329-MA6-003	BEARING E, MAIN (YELLOW DAIDO)	2 2		
			13329-MA6-004	BEARING E, MAIN (YELLOW TAIHO)	2 2		
			13330-MA6-003	BEARING F, MAIN (PINK DAIDO)	2 2		
			13330-MA6-004	BEARING F, MAIN (PINK TAIHO)	2 2		
			13331-MA6-003	BEARING G, MAIN (RED DAIDO)	2 2		
			13331-MA6-004	BEARING G, MAIN (RED TAIHO)	2 2		
		11	13610-MA6-000	CHAIN, PRIMARY	1 1		
		12	91203-MA6-003	OIL SEAL, 30X45X8	1 1		

D 14


E-15

Crankshaft • Piston

Vilebrequin • Piston

Kurbelwelle • Kolben

Cigüeñal • Pistón

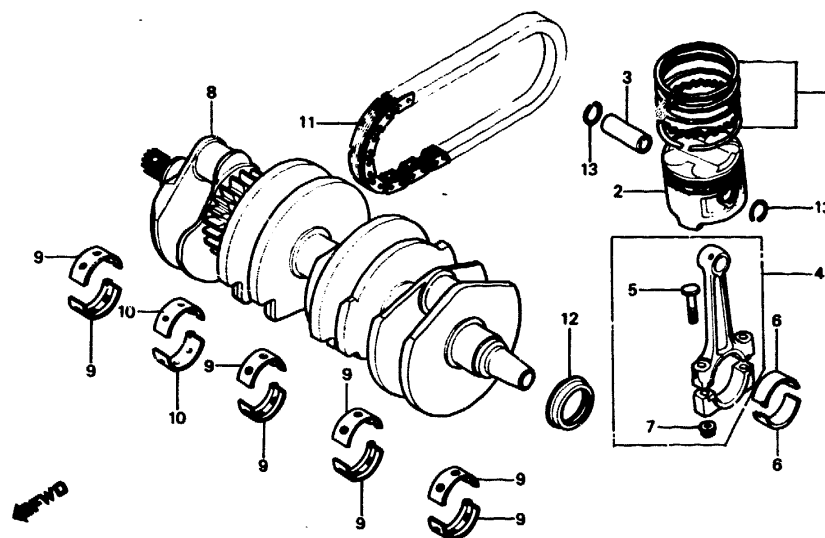

BMA6-15

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		13	94601-15000	CLIP, PISTON PIN, 15MM	8 8		

D 15


E-16

Transmission

Transmission

Getriebe

Transmisión

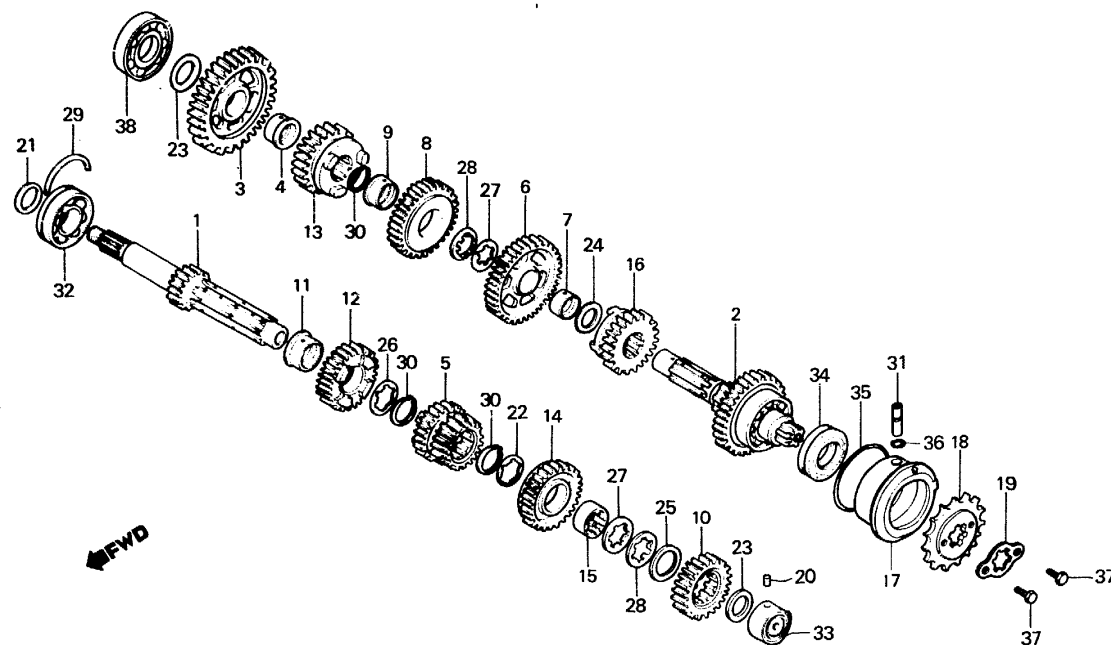

BMA6-16B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
MAINSHAFT COMP. (INC. RELATIVE PART)	*4.9	1	23210-MA6-000	MAINSHAFT COMP.	1 1	1016647	
• COUNTERSHAFT COMP. (INC. RELATIVE PART)		2	23220-MA6-000	COUNTERSHAFT COMP.	1 1		
(WHEN SERVICING COMP., UNIT, F.R.T. IS 5.1.)		3	23220-MA6-010	COUNTERSHAFT COMP.	1 1		
• HOLDER, COUNTERSHAFT BEARING SPROCKET, DRIVE	0.3	4	23411-MA6-000	GEAR, COUNTERSHAFT LOW (36T)	1 1		
		5	23412-MA6-000	BUSH, 20MM	1 1		
		6	23431-MA6-000	GEAR, MAINSHAFT SECOND & THIRD	1 1		
		7	23441-MA6-000	GEAR, COUNTERSHAFT SECOND (37T)	1 1		
		8	23442-MA6-000	BUSH, 25MM	1 1		
		9	23451-MA6-000	GEAR, COUNTERSHAFT THIRD (34T)	1 1		
		10	23452-MA6-000	COLLAR, SPLINE, 25	1 1		
		11	23461-MA6-000	GEAR, MAINSHAFT FOURTH	1 1		
		12	23472-MA6-000	BUSH, 25MM	1 1		
			23481-MA6-000	GEAR, MAINSHAFT FIFTH (27T)	1 1		

D 16


E-16

Transmission

Transmission

Getriebe

Transmisión

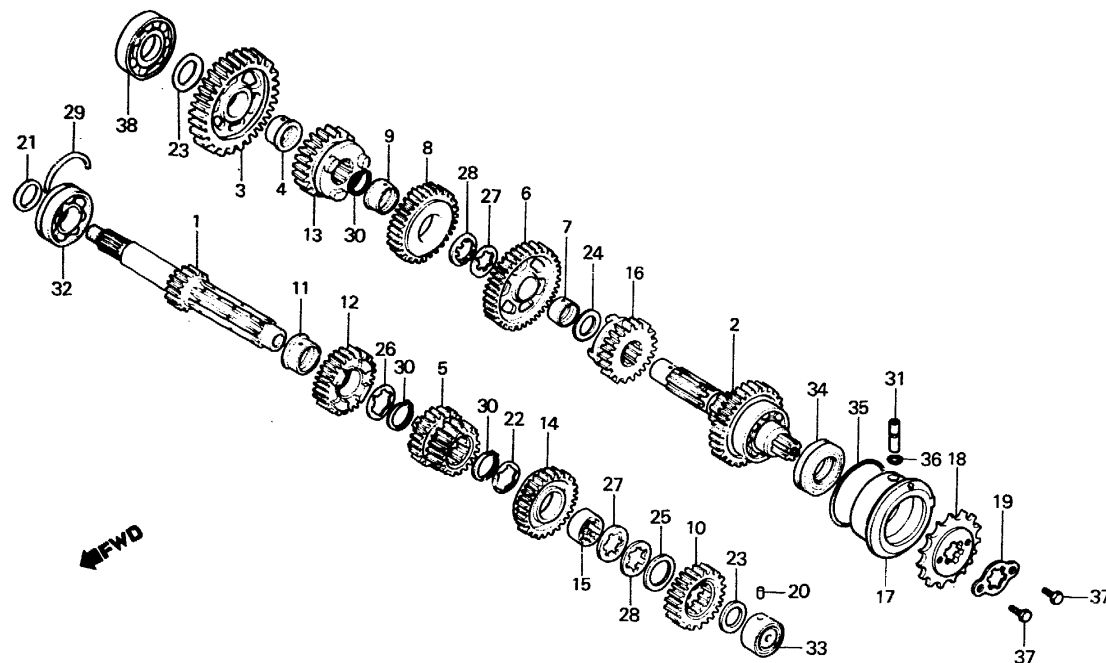

BMA6-16B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		13	23491-MA6-000	GEAR, COUNTERSHAFT FIFTH (29T)	1 1	1012825	
			23491-MA6-010	GEAR, COUNTERSHAFT FIFTH (29T)	1 1	1012826	
		14	23501-MA6-000	GEAR, MAINSHAFT SIXTH (29T)	1 1		
		15	23505-MA6-000	COLLAR, SPLINE, 25	1 1		
		16	23511-MA6-000	GEAR, COUNTERSHAFT SIXTH (27T)	1 1	1012825	
			23511-MA6-010	GEAR, COUNTERSHAFT SIXTH (27T)	1 1	1012826	
		17	23611-MA6-000	HOLDER, COUNTERSHAFT BEARING	1 1		
		18	23801-MA6-620	SPROCKET, DRIVE (15T)	1 1	1016133	
			23801-MA6-621	SPROCKET, DRIVE (15T)	1 1	1016134	
		19	23811-292-000	PLATE, DRIVE SPROCKET FIXING	1 1		

E 1


E-16

Transmission

Transmission

Getriebe

Transmisión

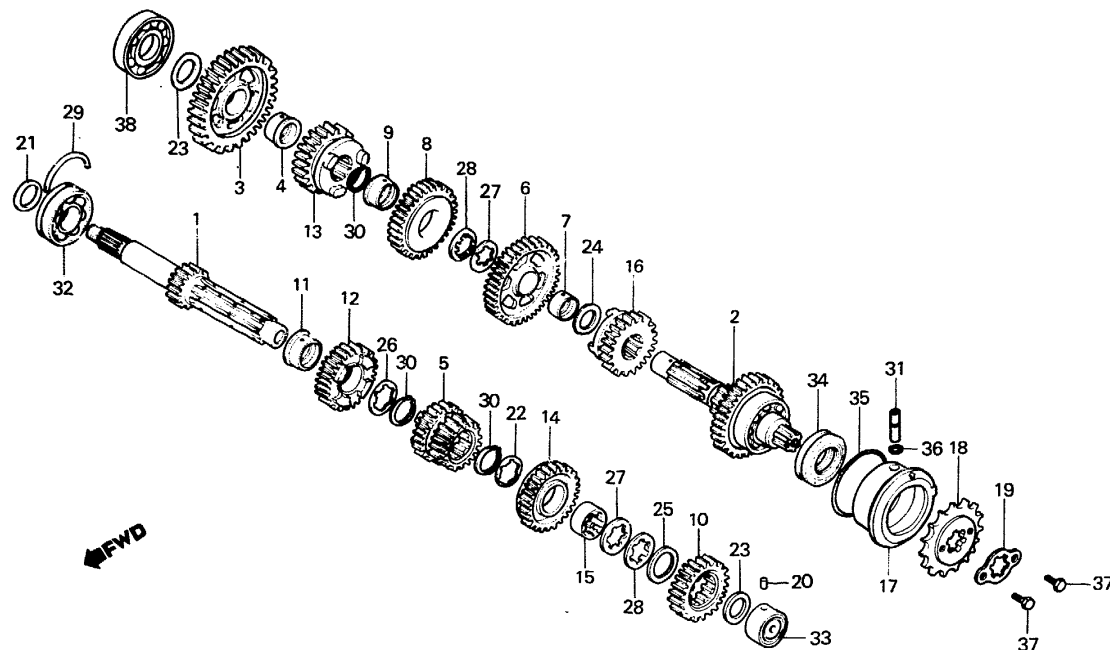

BMA6-16B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc FZc	Serial No.	Area code
		20	24261-283-000	PIN, GEARSHIFT FORK GUIDE	1 1		
		21	90433-MA6-000	WASHER, THRUST, 22MM	1 1		
		22	90451-371-000	WASHER, THRUST, 25MM	1 1		
		23	90454-428-000	WASHER, THRUST, 20MM	2 2		
		24	90456-MA6-000	WASHER, THRUST, 25MM	1 1		
		25	90457-MA6-000	WASHER, 25MM	1 1		
		26	90458-MA6-000	WASHER, SPLINE, 25MM	1 1		
		27	90461-286-000	WASHER B, THRUST, 25MM	2 2		
		28	90462-323-000	WASHER, LOCK, 25MM	2 2		
		29	90601-MA6-000	RING, BEARING SETTING, 56MM	1 1		
		30	90601-300-000	CIRCLIP, 25MM	3 3		
		31	90704-MA6-000	PIN, 8X12	1 1		
		32	91004-MA6-003	BEARING, RADIAL BALL, 63/22	1 1		
		33	91022-MA6-003	BEARING, NEEDLE, 20MM	1 1		

E 2


E-16

Transmission

Transmission


Getriebe

Transmisión

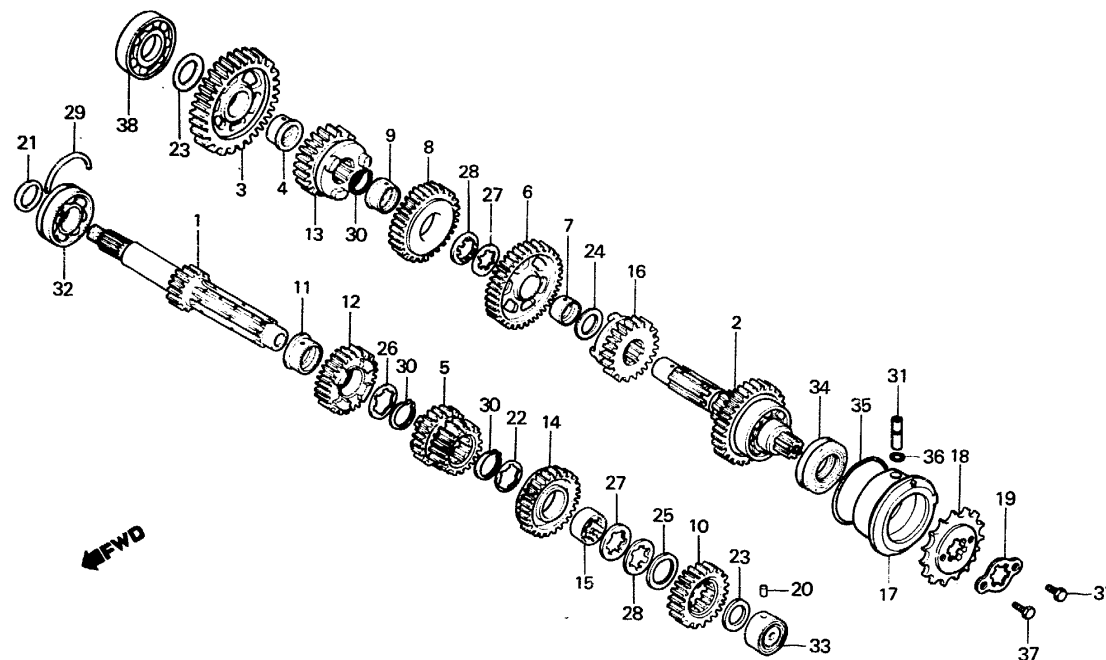

BMA6-16B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CbX400 Fc F2c	Serial No.	Area code
		34	91205-MA6-003	OIL SEAL, 34X54X13.5 (ARAI)	1 1		
			91205-MA6-005	OIL SEAL, 34X54X13.5 (NIPPON)	1 1		
		35	91311-MA6-003	O-RING, 67X2.5 (ARAI)	1 1		
			91311-MA6-005	O-RING, 67X2.5 (NIPPON)	1 1		
		36	91313-MA6-003	O-RING, 4.8X1.9 (ARAI)	1 1		
			91313-MA6-005	O-RING, 4.8X1.9 (NIPPON)	1 1		
		37	92000-06012	BOLT, HEX., 6X12	2 2	1016133	
			90015-MA6-000	BOLT, SPECIAL, 6X14	2 2	1016134	
		38	96100-62043-00	BEARING, RADIAL BALL, 6204	1 1		




E-17

Gearshift drum

Tambour de changement de vitesse

Geangschaltwalze

Tambor de cambio

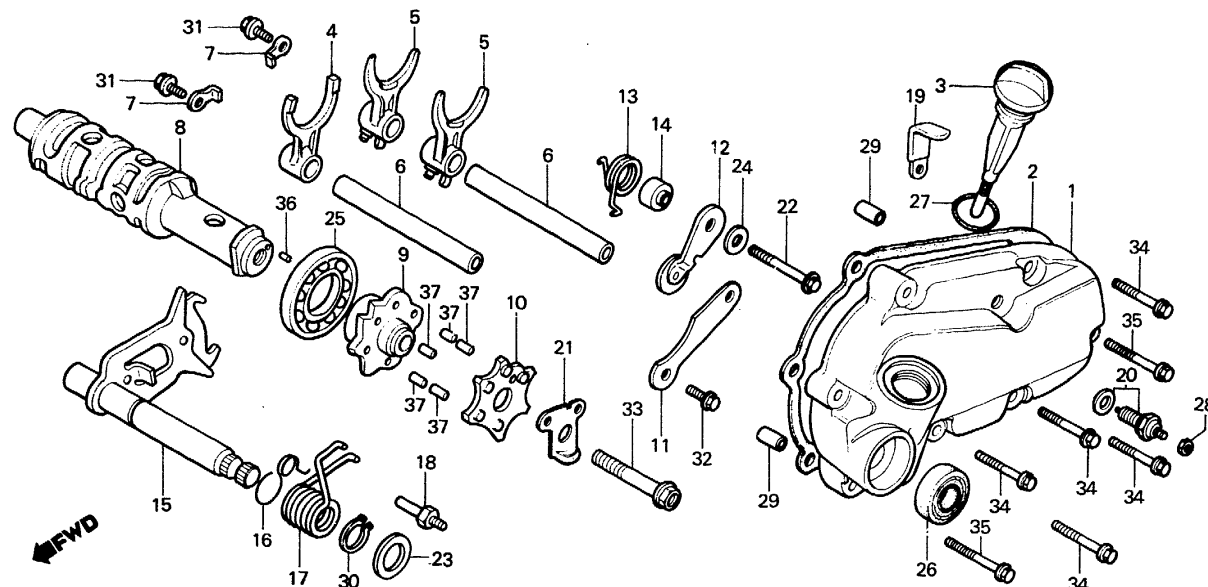

BMA6-17C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
COVER, CHANGE	0.3	1	11351-MA6-000	COVER, CHANGE	1 1		
• GASKET, CHANGE COVER		2	11359-MA6-000	GASKET, CHANGE COVER	1 1		
• OIL SEAL, 14X28X7		3	15650-MA6-000	GAUGE, OIL LEVEL	1 1		
FORK, GEARSHIFT	*4.7	4	24211-MA6-000	FORK, MAINSHAFT GEARSHIFT	1 1		
(INC. RELATIVE PART)		5	24221-MA6-000	FORK, COUNTERSHAFT GEARSHIFT	2 2		
(ONE OR ALL)							
DRUM, GEARSHIFT	*4.8	6	24261-MA6-000	SHAFT, GEARSHIFT FORK	2 2		
CENTER, GEARSHIFT DRUM	0.4	7	24262-MA6-000	STOPPER, GEARSHIFT FORK SHAFT	2 2		
(INC. RELATIVE PART)		8	24301-MA6-000	DRUM, GEARSHIFT	1 1		
• STOPPER COMP., GEARSHIFT DRUM		9	24302-MA6-000	CENTER, GEARSHIFT DRUM	1 1		
• SPINDLE COMP., GEARSHIFT		10	24303-MA6-000	PLATE, DRUM CENTER	1 1		
(INC. RELATIVE PART)							
SWITCH ASSY., NEUTRAL	0.2	11	24307-MA6-000	PLATE, GEARSHIFT DRUM SETTING	1 1		

E 4


E-17

Gearshift drum

Tambour de changement de vitesse

Geangschaltwalze

Tambor de cambio

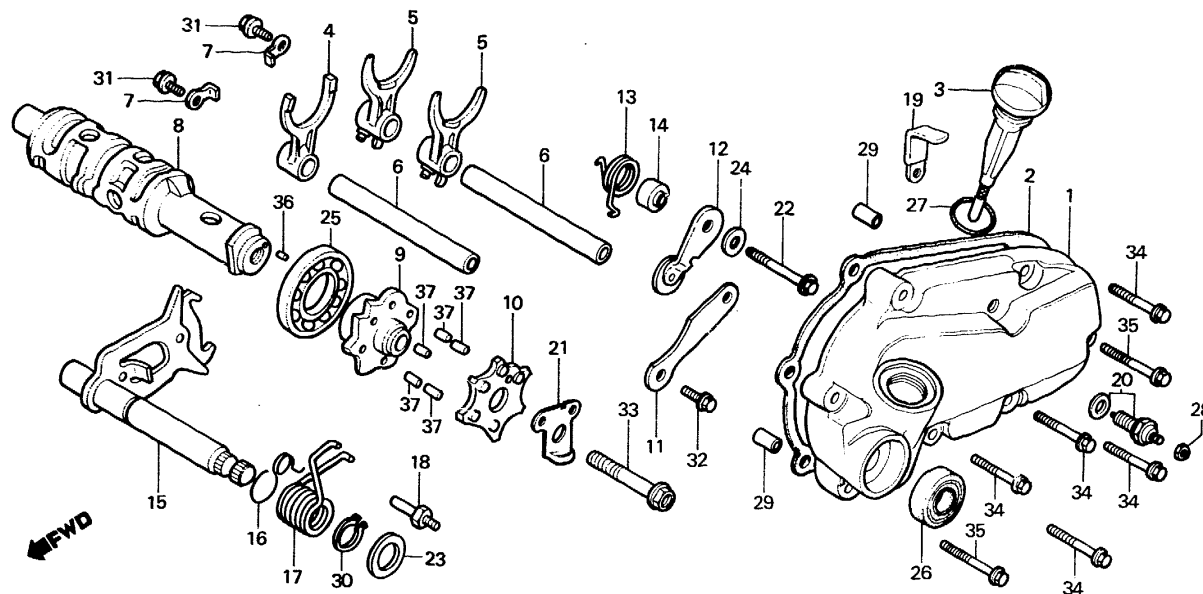

BMA6-17C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CbX400 Fc F2c	Serial No.	Area code
		12	24430-MA6-000	STOPPER COMP., GEARSHIFT DRUM	1 1		
		13	24435-MA6-000	SPRING, SHIFT DRUM STOPPER	1 1		
		14	24437-MA6-000	COLLAR, GEARSHIFT DRUM STOPPER	1 1		
		15	24610-MA6-000	SPINDLE COMP., GEARSHIFT	1 1		
		16	24624-MA6-000	SPRING, GEARSHIFT RESET	1 1		
		17	24651-107-000	SPRING, GEARSHIFT RETURN	1 1		
		18	24652-259-000	PIN, SHIFT RETURN SPRING	1 1		
		19	32111-323-000	CLAMPER, CORD	1 1		
		20	35600-422-003	SWITCH ASSY., NEUTRAL	1 1		
		21	35753-MA6-000	ROTOR, NEUTRAL SWITCH	1 1		
		22	90008-415-000	BOLT, SPECIAL, 6X30	1 1		

E 5


E-17

Gearshift drum

Tambour de changement de vitesse

Geangschaltwalze

Tambor de cambio

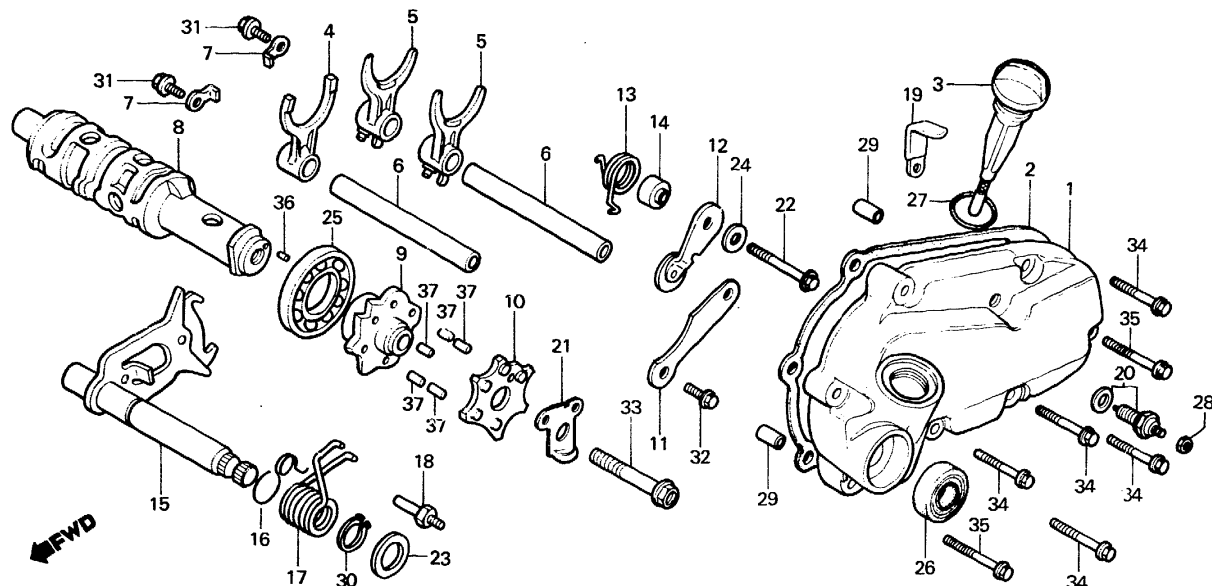

BMA6-17C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		23	90451-115-000	WASHER, 14.2MM	1 1		
		24	9C 453-292-010	WASHER, SHIFT DRUM STOPPER	1 1		
		25	91008-374-003	BEARING, BALL, 16005 (TOYO)	1 1		
		26	91206-MA6-003	OIL SEAL, 14X28X7 (ARAI)	1 1		
			91206-MA6-005	OIL SEAL, 14X28X7 (NIPPON)	1 1		
		27	91301-250-000	O-RING, 21.5MM	1 1		
		28	94001-04000-0S	NUT, HEX., 4MM	1 1		
		29	94301-08140	PIN, DOWEL, 8X14	2 2		
		30	94510-14000	CIRCLIP, EXTERNAL, 14MM	1 1		
		31	95700-06014-00	BOLT, FLANGE, 6X14	2 2		
		32	95700-06016-08	BOLT, FLANGE, 6X16	1 1		
		33	95900-08040-09	BOLT, FLANGE, 8X40	1 1		
		34	96000-06028-00	BOLT, FLANGE, 6X28	5 5		
		35	96000-06035-00	BOLT, FLANGE, 6X35	2 2		

E 6


E-17

Gearshift drum

Tambour de changement de vitesse

Geangschaltwalze

Tambor de cambio

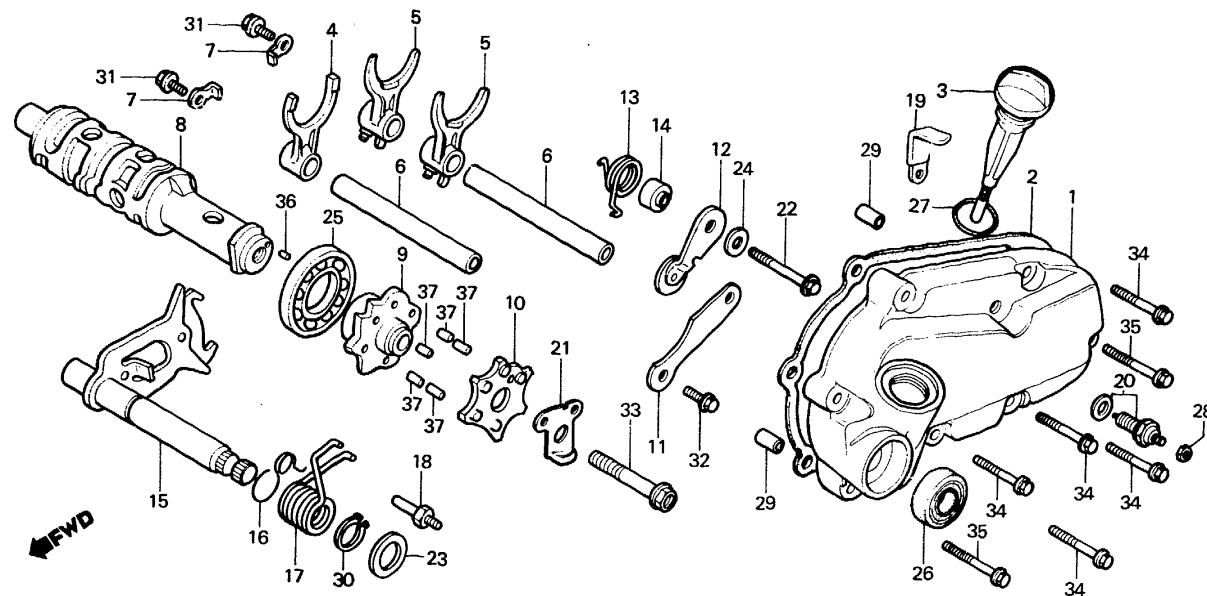

BMA6-17C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		36	96220-40130	ROLLER, 4X13	1 1		
		37	96220-40148	ROLLER, 4X14.8	5 5		
1985.02.20 E E6							

E 7


E-18

**Carburetor
(Assy. • Link)**

**Carburateur
(Ens. • Tringlerie)**

**Vergaser
(Kompl. • Gestänge)**

**Carburador
(Ens. • Articulación)**

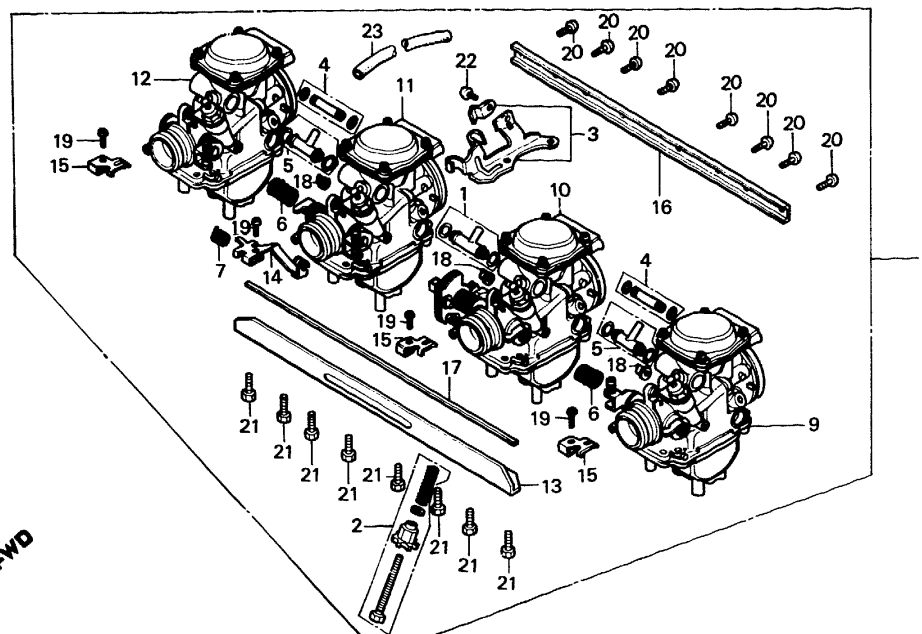

BMA6-18A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CbX400 Fc F2c	Serial No.	Area code
JOINT SET (ADD 0.2 FOR EACH.)	1.1	1	16026-MA6-003	JOINT SET	1 1		
• CARBURETOR ASSY. 1		2	16028-MA6-003	SCREW SET	1 1		
• CARBURETOR ASSY. 2		3	16035-MA6-003	PLATE SET, STAY	1 1		
CARBURETOR ASSY.	0.8	4	16042-MA6-003	JOINT SET, FUEL	2 2		
ROD	0.4	5	16047-MA6-003	JOINT SET, FUEL	2 2		
		6	16053-MA6-003	SPRING	2 2		
		7	16054-MA6-003	SPRING	1 1		
		8	16100-MA6-003	CARBURETOR ASSY.	1 1	1058149	
			16100-MA6-621	CARBURETOR ASSY.	1 1	VE50A [P]	
		9	16101-MA6-013	CARBURETOR ASSY. 1	1 1	VE50A [P]	
			16101-MA6-621	CARBURETOR ASSY. 1	1 1	VE50A [P]	
		10	16102-MA6-013	CARBURETOR ASSY. 2	1 1	VE50A [P]	
			16102-MA6-621	CARBURETOR ASSY. 2	1 1	VE50A [P]	
		11	16103-MA6-013	CARBURETOR ASSY. 3	1 1	VE50A [P]	
			16103-MA6-621	CARBURETOR ASSY. 3	1 1	VE50A [P]	
		12	16104-MA6-013	CARBURETOR ASSY. 4	1 1	VE50A [P]	
			16104-MA6-621	CARBURETOR ASSY. 4	1 1	VE50A [P]	
		13	16119-MA6-003	PLATE, STAY	1 1		
		14	16120-MA6-003	LEVER, STARTER	1 1		

E 8


E-18

Carburetor
(Assy. • Link)

Carburateur
(Ens. • Tringlerie)

Vergaser
(Kompl. • Gestänge)

Carburador
(Ens. • Articulación)

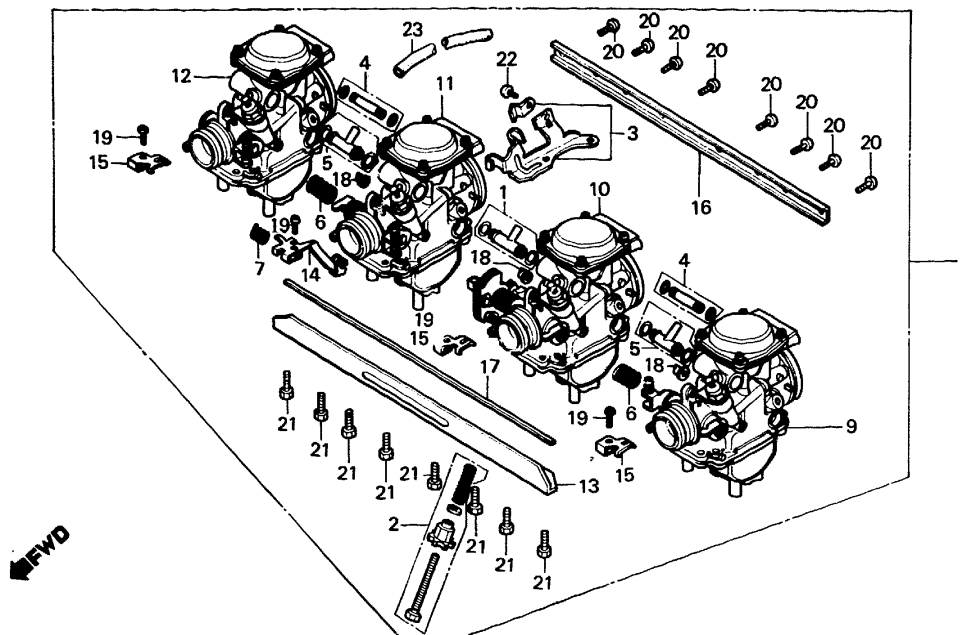

BMA6-18A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		15	16121-MA6-003	LEVER, STARTER	3 3		
		16	16129-MA6-003	PLATE, STAY	1 1		
		17	16145-MA6-003	ROD	1 1		
		18	16172-MA6-003	COLLAR, SETTING	4 4		
		19	93500-04008-1A	SCREW, PAN, 4X8	4 4		
		20	93500-05010-0A	SCREW, PAN, 5X10	8 8		
		21	93500-06012-0A	SCREW, PAN, 6X12	8 8		
		22	93892-04012-00	SCREW-WASHER, 4X12	1 1		
		23	95003-19040-31	TUBE, VINYL, 7X11X400	2 2		

E 9


E-18-1

Carburetor
(Component parts)

Carburateur
(Pièces composantes)

Vergaser
(Einzelteil)

Carburador
(Piezas componentes)

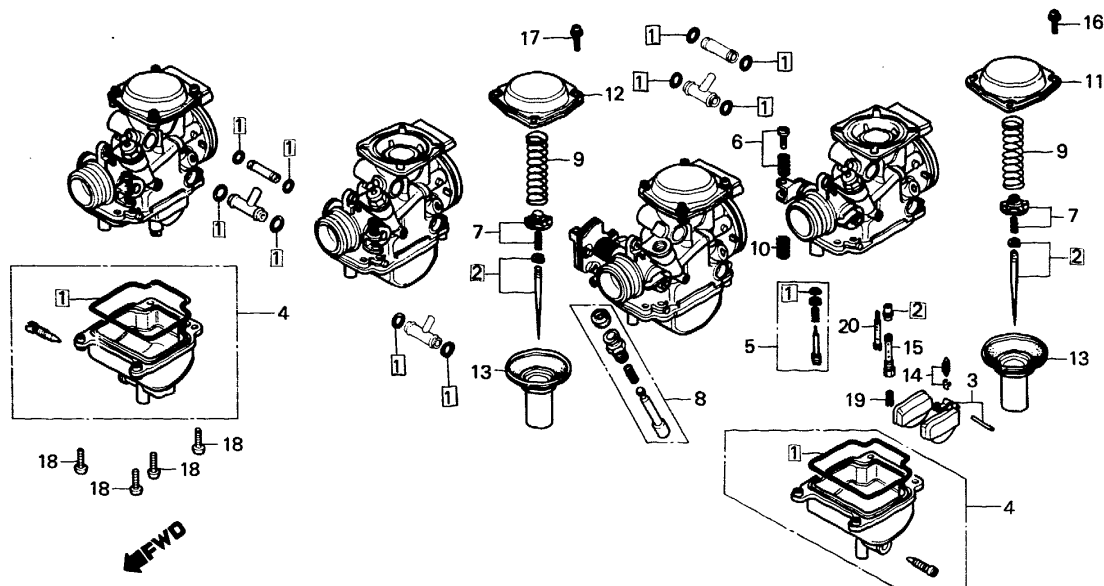

BMA6-19

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
GASKET SET (ADD 0.4 FOR EACH.)	1.6	1	16010-MA6-003	GASKET SET	4 4		
NEEDLE SET, JET (ADD 0.3 FOR EACH.)	0.7	2	16012-MA6-013	NEEDLE SET, JET	4 4		
FLOAT SET (ADD 0.2 FOR EACH.)	1.0	3	16013-MA6-003	FLOAT SET	4 4		
VALVE COMP., FLOAT (ADD 0.2 FOR EACH.)		4	16015-MA6-003	CHAMBER SET, FLOAT	4 4		
CHAMBER SET, FLOAT (ADD 0.2 FOR EACH.)	0.4	5	16016-MA6-003	SCREW SET	1 1		
VALVE, THROTTLE (ADD 0.2 FOR EACH.)		6	16029-MA6-003	SCREW SET	3 3		
VALVE SET, STARTER (ADD 0.1 FOR EACH.)	0.3	7	16037-MA6-003	PLATE SET, VALVE	4 4		
(WHEN SERVICING COMP., UNIT, F.R.T. IS 0.5.)		8	16046-MA6-003	VALVE SET, STARTER	4 4		
JET, MAIN, (ADD 0.2 FOR EACH.)	0.5	9	16051-MA6-003	SPRING	4 4		
		10	16052-MA6-003	SPRING	3 3		
		11	16107-MA6-003	TOP COMP.	2 2		
		12	16108-MA6-003	TOP COMP.	2 2		
		13	16111-MA6-003	VALVE, THROTTLE	4 4		
			16111-MA6-621	VALVE, THROTTLE	4 4		
		14	16155-413-751	VALVE COMP., FLOAT	4 4		
		15	16165-449-771	HOLDER, NEEDLE JET	4 4		
		16	93500-04008-0A	SCREW, PAN, 4X8	14 14		
		17	93500-04010-0A	SCREW, PAN, 4X10	2 2		

VE50A [P] VE50A [D]

E 10


E-18-1

**Carburetor
(Component parts)**

**Carburateur
(Pièces composantes)**

**Vergaser
(Einzelteil)**

**Carburador
(Piezas componentes)**

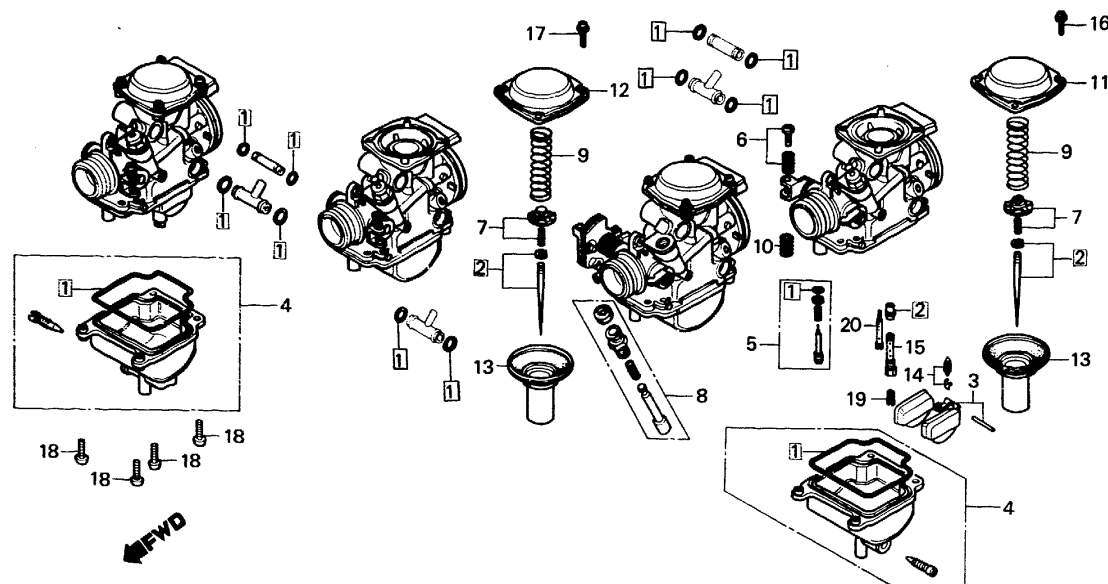

BMA6-19

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		18	93500-04014-0A	SCREW, PAN, 4X14	16	16	
		19	99101-393-0880	JET, MAIN, #88	4	4	
		20	99103-MA6-003	JET, SLOW, #35	4	4	

E 11

EOP-1

Gasket kit A

Trousse de joint A

Dichtung Satz A

Equipo de empacadura A

Service item	F.R.T.	Ref. No.	Part No.	Description	Regd. No. CBX400 Fc F2c	Serial No.	Area code
			061A1-MA6-000	GASKET KIT A (COMPONENT PARTS)	(1) (1)		
		1	12191-MA6-000	GASKET, CYLINDER	1 1		
		2	12209-MA6-005	SEAL, VALVE STEM	16 16		
		3	12251-MA6-000	GASKET, CYLINDER HEAD	1 1		
		4	12391-MA6-000	GASKET, HEAD COVER	1 1		
		5	18291-236-000	GASKET, EX. PIPE	4 4		
		6	91301-200-000	O-RING, 10X1.6	16 16		
		7	91303-259-000	O-RING, 11X2.0	1 1		
		8	91304-MA6-000	O-RING, 61X2	4 4		
		9	91305-MA6-000	O-RING, 13.4X2.1	4 4		
		10	91306-MA6-003	O-RING, 31.7X2.4 (ARAI)	4 4		
		11	91316-MA6-005	O-RING, 13X2.4	1 1		

E 12**EOP-2****Gasket kit B****Trousse de joint B****Dichtung Satz B****Equipo de empacadura B**

Service item	F.R.T.	Ref. No.	Part No.	Description	Regd. No. CBX400 Fc F2c	Serial No.	Area code
			061B1-MA6-000	GASKET KIT B (COMPONENT PARTS)	(1) (1)		
		1	11359-MA6-000	GASKET, CHANGE COVER	1 1		
		2	11395-MA6-000	GASKET, A.C. GENERATOR COVER	1 1		
		3	11396-MA6-000	GASKET, CLUTCH COVER	1 1		
		4	11398-MA6-000	GASKET, OIL PAN	1 1		
		5	11691-MA6-000	GASKET, STARTER COVER	1 1		
		6	15154-MA6-000	PACKING, OIL STRAINER	1 1		
		7	91301-250-000	O-RING, 21.5MM	1 1		
		8	91302-377-000	O-RING, 15X2.5	3 3		
		9	91303-377-000	O-RING, 13.8X2.5	1 1		
		10	91308-MA6-005	O-RING, 14.6X3.6	2 2		
		11	91309-MA6-000	O-RING	1 1		
		12	91310-MA6-003	O-RING, 11.0X2.5X4	1 1		
		13	91314-MA6-005	O-RING, 11X2.4	2 2		

E 13

EOP-2

Gasket kit B

Trousse de joint B


Dichtung Satz B

Equipo de empackadura B


Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No.		Serial No.	Area code
					CBX400 Fc	F2c		
		14	91315-MA6-003	O-RING, 81X4.5	1	1		
		15	91356-MA6-003	O-RING, 14.8X2.4 (ARAI)	1	1		




BLOCK INDEX - FRAME GROUP

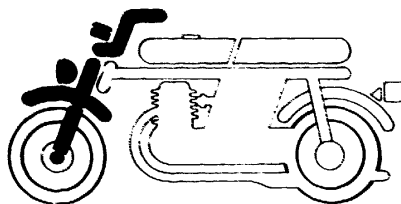


F- 1	Headlight (CBX400Fc).....	F 2
F- 1-1	Headlight (CBX400F2c).....	F 5
F- 2	Meter	F 8
F- 3	Handle lever - Switch - Cable	F 10
F- 4	Front brake master cylinder	F 13
F- 5	Handle pipe - Top bridge	F 15
F- 6	Steering stem	G 2
F- 7	Front fender.....	G 4
F- 8	Front fork.....	G 5

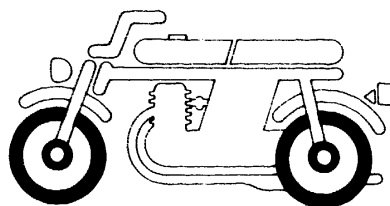


F- 9	Front brake caliper	G 10
F-10	Front wheel	G 13
F-11	Rear brake master cylinder	G 15
F-12	Rear brake caliper	H 1
F-13	Rear wheel	H 3

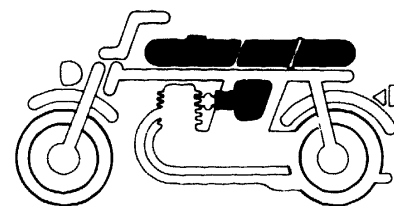


F-14	Fuel tank	H 6
F-15	Seat	H 9
F-16	Side cover - Battery.....	H 12
F-17	Side cover	H 16
F-18	Air cleaner.....	I 2

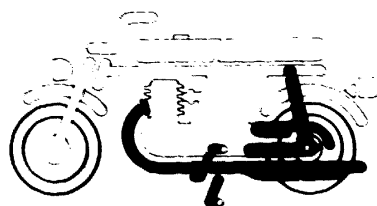

F-19	Exhaust muffler.....	I 4
F-20	Brake pedal - Change pedal.....	I 5
F-21	Step	I 6
F-22	Stand	I 9
F-23	Rear fork - Chain case.....	I 11
F-24	Rear cushion.....	I 15

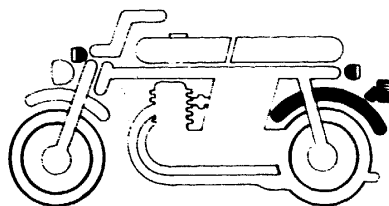

F-25	Rear fender.....	J 2
F-26	Winker.....	J 4
F-27	Tailight	J 8

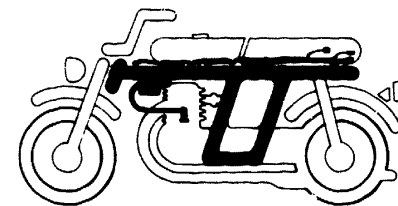

F-28	Wire harness - Ignition coil.....	J 9
F-29	Frame body	J 12
F-30	Tool	J 15
F-31	Emblem (CBX400Fc).....	K 1
F-32	Stripe (CBX400Fc - F2c)	K 2
F-32-1	Stripe (CBX400Fc - F2c-ED)	K 5
F-33	Fairing (CBX400F2c).....	K 8
F-34	Fairing stay (CBX400F2c)	K 10

F 2


F-1

**Headlight
(CBX400Fc)**

**Phare
(CBX400Fc)**

**Scheinwerfer
(CBX400Fc)**

**Faro delantero
(CBX400Fc)**

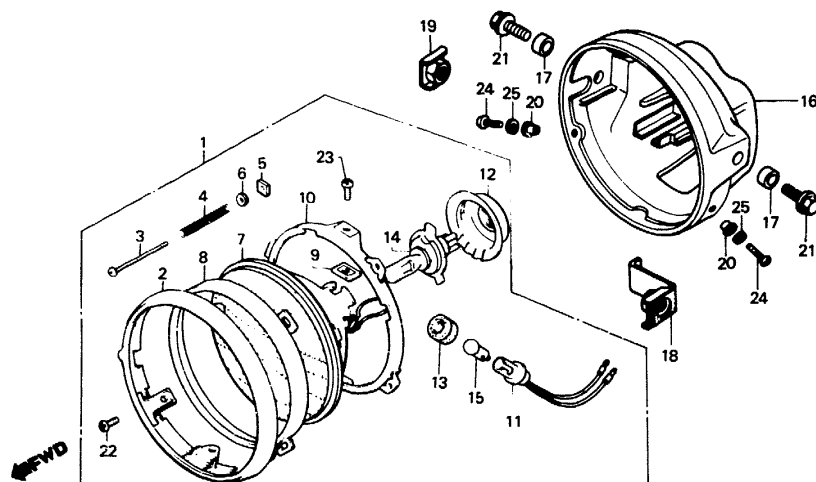

BMA6-21A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
HEADLIGHT ASSY.	0.1	1	33100-422-601	HEADLIGHT ASSY. (12V 60/55W)	1		U
• SOCKET COMP., MARKER LIGHT			33100-422-611	HEADLIGHT ASSY. (12V 60/55W)	1		ED
• SOCKET COMP., POSITION LIGHT			33100-422-621	HEADLIGHT ASSY. (12V 60/55W)	1		F
• H4 BULB(12342/99) MFD. BY PHI-		2	33101-460-571	RIM, HEADLIGHT	1		
	LIPS	3	33103-346-670	SCREW, BEAM ADJUSTING	1		
HEADLIGHT UNIT	0.2	4	33107-300-003	SPRING, HEADLIGHT BEAM	1		
(INC. RELATIVE PART)				ADJUSTING			
CASE, HEADLIGHT	0.3	5	33117-001-023	NUT, HEADLIGHT BEAM ADJUSTING	1		
		6	33119-371-003	WASHER, BEAM ADJUSTING	1		
		7	33120-371-601	HEADLIGHT UNIT	1		U
			33120-371-611	HEADLIGHT UNIT	1		ED, F
		8	33121-405-671	RING, RETAINING	1		
		9	33128-292-670	NUT, UNIT HOLDER	2		
		10	33153-422-003	RING, MOUNTING	1		
		11	33170-390-611	SOCKET COMP., MARKER LIGHT	1		

F 3


F-1

**Headlight
(CBX400Fc)**

**Phare
(CBX400Fc)**

**Scheinwerfer
(CBX400Fc)**

**Faro delantero
(CBX400Fc)**

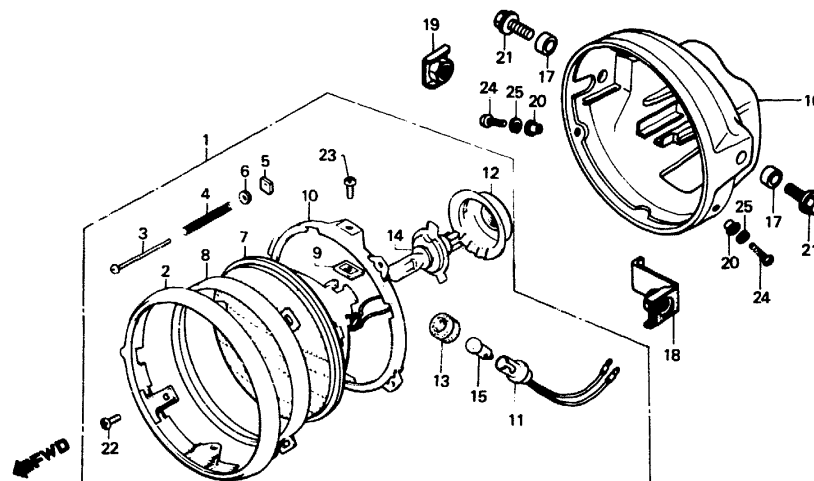

BMA6-21A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
			34904-303-003	SOCKET COMP., POSITION LIGHT	1		
		12	33180-422-003	COVER, RUBBER	1		
		13	33905-371-601	RUBBER, JOINT	1		
		14	34901-371-601	BULB (12342/99)	1	2003627	ED
			34901-371-621	H4 BULB (12342/99) MFD. BY PHILIPS (LOCAL PROCUREMENT PART)	1		F
			34901-MC7-601	BULB, HEADLIGHT (H4 JA12V60/55W)	1	2003628	ED
		15	34903-388-611	BULB, POSITION (12V 4W)	1		U
		16	61301-MA6-000	CASE, HEADLIGHT	1		
		17	61302-425-000	COLLAR, HEADLIGHT CASE	2		
		18	61303-MA6-000	NUT, HEADLIGHT CASE	1		
		19	61303-425-010	NUT, HEADLIGHT CASE	1		
		20	61304-292-000	COLLAR, HEADLIGHT SETTING	2		
		21	90151-422-000	BOLT, HEADLIGHT CASE SETTING	2		
		22	93500-03008-1A	SCREW, PAN, 3X8	2		
		23	93500-05008-0H	SCREW, PAN, 5X8	2		

F 4


F-1

Headlight
(CBX400Fc)

Phare
(CBX400Fc)

Scheinwerfer
(CBX400Fc)

Faro delantero
(CBX400Fc)

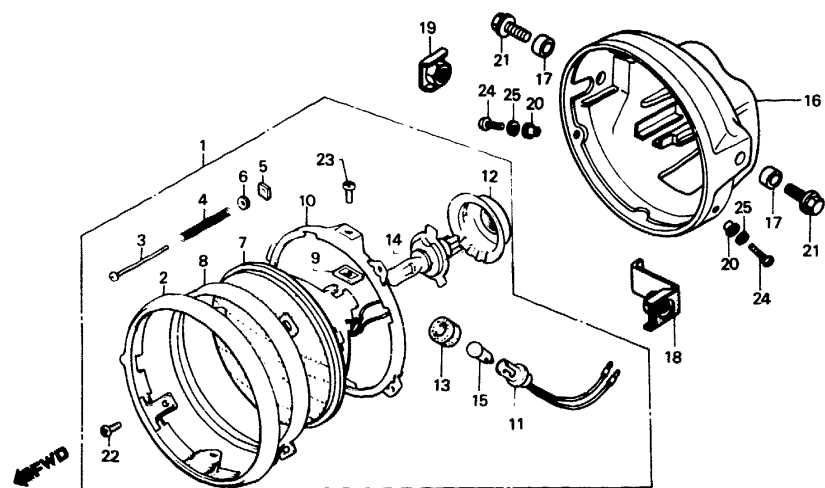

BMA6-21A

Service item	F.R.T.	Ref. No.	Part No.	Description	Regd. No. CBX400 Fc F2c	Serial No.	Area code
		24	93500-05016-0B	SCREW, PAN, 5X16	2		
		25	94111-05000	WASHER, SPRING, 5MM	2		

F 5


F-1-1

**Headlight
(CBX400F2c)**

**Phare
(CBX400F2c)**

**Scheinwerfer
(CBX400F2c)**

**Faro delantero
(CBX400F2c)**

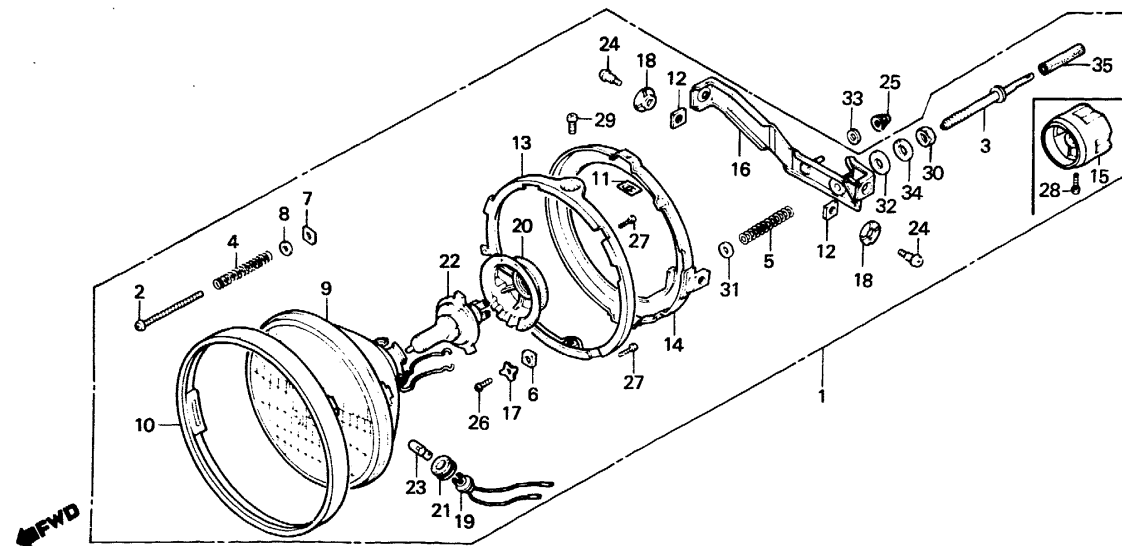

BMA6-21D

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
HEADLIGHT ASSY.	0.2	1	33100-438-851	HEADLIGHT ASSY.	1	2007136	ED
• SOCKET COMP., MARKER LIGHT			33100-438-931	HEADLIGHT ASSY.	1	2007136	F
• H4 BULB(12342/99) MFD. BY PHI-			33100-MA7-830	HEADLIGHT ASSY. (12V 60/55W)	1	2007137	ED
	LIPS		33100-MA7-850	HEADLIGHT ASSY. (12V 60/55W)	1	2007137	F
HEADLIGHT UNIT (INC. RELATIVE PART)	0.3	2	33103-346-670	SCREW, BEAM ADJUSTING	1		
• RING B, MOUNTING		3	33103-438-841	SCREW, BEAM ADJUSTING	1		
BRACKET, HEADLIGHT	0.4	4	33107-300-003	SPRING, HEADLIGHT BEAM	1		
		5	33107-438-841	SPRING, HEADLIGHT BEAM	1		
				ADJUSTING			
				ADJUSTING			
		6	33117-438-841	NUT, BEAM ADJUSTING	1		
		7	33118-438-841	NUT, BEAM ADJUSTING	1		
		8	33119-371-003	WASHER, BEAM ADJUSTING	1		
		9	33120-371-611	HEADLIGHT UNIT	1		
		10	33121-463-771	RING, RETAINING	1		

F 6


F-1-1

Headlight (CBX400F2c)

**Phare
(CBX400F2c)**

Scheinwerfer (CBX400F2c)

Faro delantero (CBX400F2c)

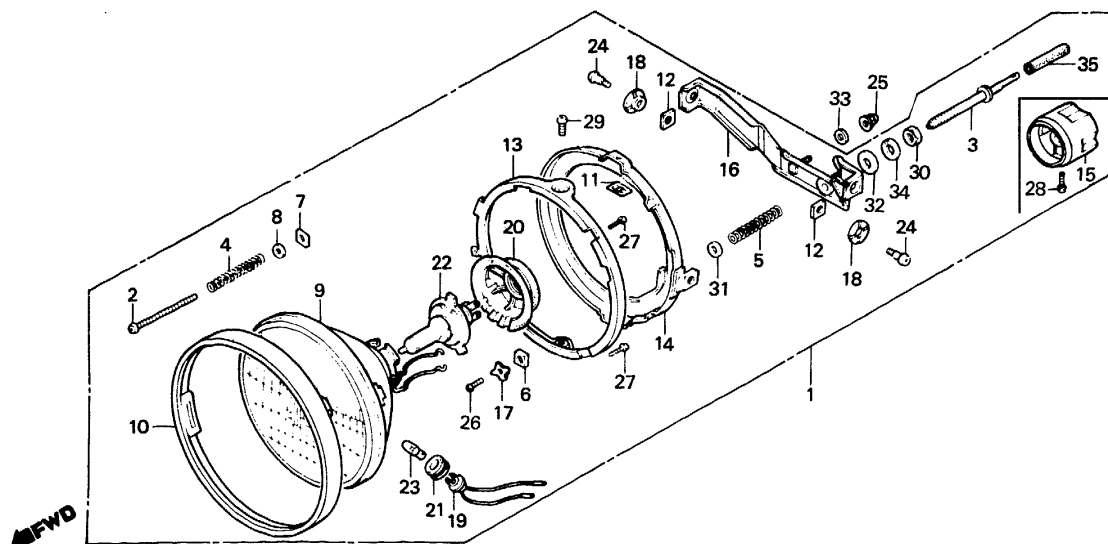

BMA6-21D

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No.		Serial No.	Area code
					CBX400 Fc	F2c		
		11	33128-292-670	NUT, UNIT HOLDER	2			
		12	33128-438-841	NUT, UNIT HOLDER	2			
		13	33153-463-771	RING A, MOUNTING	1			
		14	33154-438-841	RING B, MOUNTING	1			
		15	33155-463-771	KNOB, BEAM ADJUSTING	1		2007136	
		16	33156-438-841	BRACKET, HEADLIGHT	1			
		17	33157-463-771	WASHER, SPRING	1			
		18	33165-463-771	WASHER, HEADLIGHT	2			
		19	33170-390-611	SOCKET COMP., MARKER LIGHT	1			
		20	33180-422-003	COVER, RUBBER	1			
		21	33905-371-601	RUBBER, JOINT	1			
		22	34901-371-601	BULB (12342/99)	1		2003627	ED
			34901-371-621	H4 BULB(12342/99) MFD. BY PHI-LIPS (LOCAL PROCUREMENT PART)	1			F
			34901-MC7-601	BULB, HEADLIGHT (H4 JA12V60/55W)	1		2003628	ED
		23	34903-388-611	BULB, POSITION (12V 4W)	1			
		24	90150-463-771	SCREW, PAN, 5X10	2			

F 7


F-1-1

**Headlight
(CBX400F2c)**

**Phare
(CBX400F2c)**

**Scheinwerfer
(CBX400F2c)**

**Faro delantero
(CBX400F2c)**

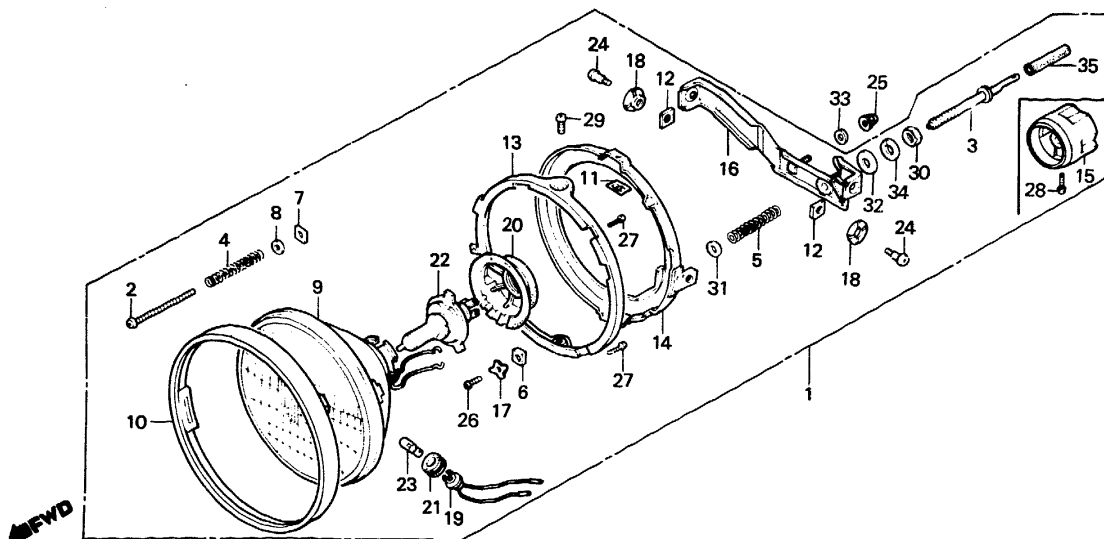

BMA6-21D

Service item	F.R.T.	Ref. No.	Part No.	Description	Regd. No. CBX400 Fc F2c	Serial No.	Area code
		25	90301-693-000	NUT, OPEN STAY, 6MM	1		
		26	93500-03008-0H	SCREW, PAN, 3X8	1		
		27	93500-03012-1A	SCREW, PAN, 3X12	2		
		28	93500-03014-0G	SCREW, PAN, 3X14	1	2007136	
		29	93500-05008-0H	SCREW, PAN, 5X8	2		
		30	94002-12080-0S	NUT, HEX., 12MM	1		
		31	94101-06800	WASHER, PLAIN, 6MM	1		
		32	94101-12800	WASHER, PLAIN, 12MM	1		
		33	94103-06700	WASHER, PLAIN, 6MM	1		
		34	94111-12800	WASHER, SPRING, 12MM	1		
		35	95005-50025-30	TUBE, 5X25	1	2007137	

F 8


F-2

Meter

Compteurs

Messer

Medidor

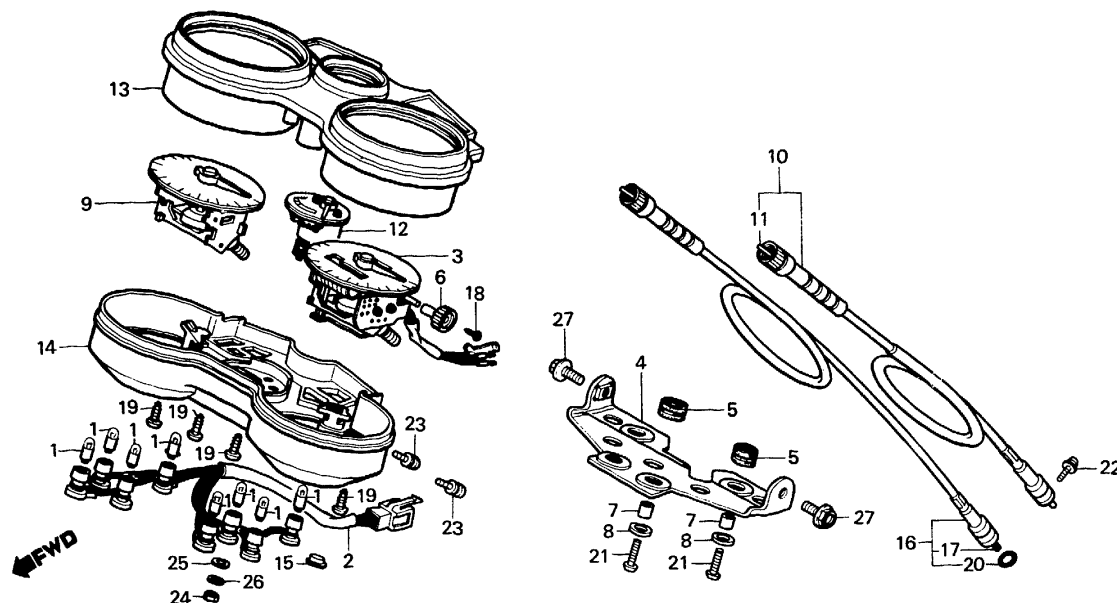

BMA6-22E

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No.		Serial No.	Area code
					CBX400	Fc F2c		
• SOCKET COMP.	0.3	1	34908-GA7-701	BULB, WEDGE BASE (12V3.4W)	8	8		
• COVER, METER UPPER		2	37105-MA6-621	SOCKET COMP.	1	1		
• SPEEDOMETER ASSY.	0.4	3	37200-MA6-621	SPEEDOMETER ASSY.	1	1		
• TACHOMETER ASSY.		4	37211-MA6-008	BRACKET, METER	1	1		
• METER ASSY., FUEL		5	37215-MA6-008	RUBBER, METER CUSHION	4	4		
• BRACKET, METER	0.2							
• CABLE ASSY., TACHOMETER		6	37220-MA6-008	KNOB, TRIP	1	1		
• CABLE, TACHOMETER INNER	0.1	7	37243-MA6-008	COLLAR, METER MOUNTING	4	4		
• CABLE ASSY., SPEEDOMETER		8	37244-MA6-008	WASHER, PLAIN	4	4		
• COVER, METER LOWER	0.5	9	37250-MA6-621	TACHOMETER ASSY.	1	1		ED,F
			37250-MA6-650	TACHOMETER ASSY.	1			U
		10	37260-MA6-000	CABLE ASSY., TACHOMETER	1	1		
		11	37261-438-000	CABLE, TACHOMETER INNER	1	1		
		12	37300-MA6-621	METER ASSY., FUEL	1	1		
		13	37616-MA6-621	COVER, METER UPPER	1	1		ED,F
			37616-MA6-622	COVER, METER UPPER	1			U

F 9


F-2

Meter

Compteurs

Messer

Medidor

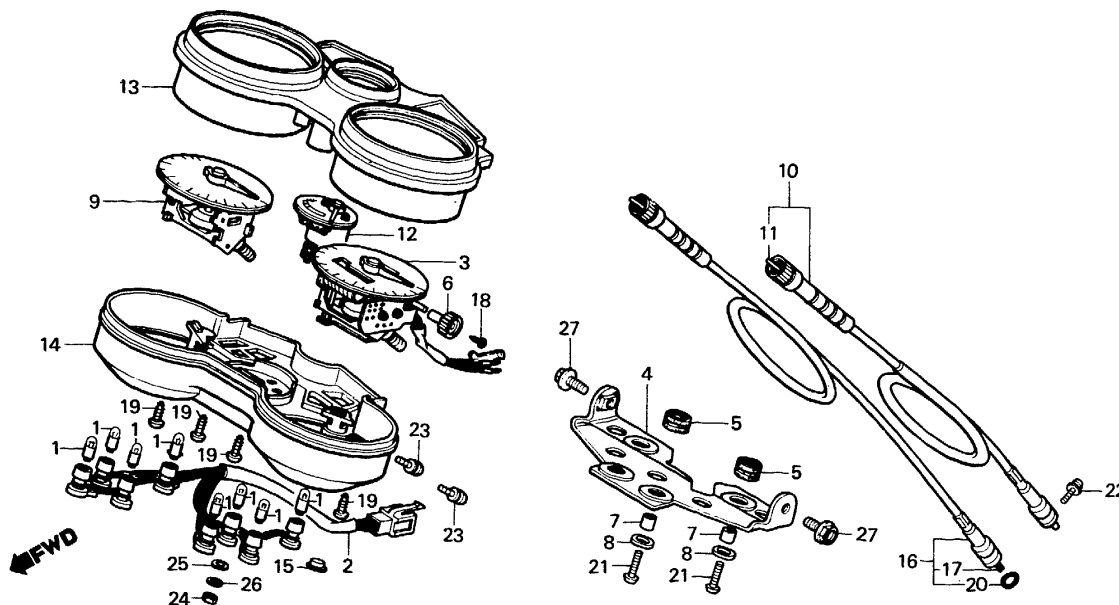

BMA6-22E

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		14	37617-MA6-008	COVER, METER LOWER	1 1		
		15	37618-MB2-008	CAP, SPEED ALARM CORD	1 1		
		16	44830-MA6-000	CABLE ASSY., SPEEDOMETER	1 1		
		17	44831-MA6-000	CABLE, INNER	1 1		
		18	90102-434-671	SCREW, TAPPING	1 1		
		19	90639-MA6-008	SCREW, TAPPING	4 4		
		20	91351-121-710	O-RING	1 1		
		21	93500-06020-0G	SCREW, PAN, 6X20	4 4		
		22	93891-05025-00	SCREW-WASHER, 5X25	1 1		
		23	93893-04008	SCREW-WASHER, 4X8	4 4		
		24	94001-03000-0S	NUT, HEX., 3MM	3 3		
		25	94103-03000	WASHER, PLAIN, 3MM	3 3		
		26	94111-03800	WASHER, SPRING, 3MM	3 3		
		27	95700-08014-07	BOLT, FLANGE, 8X14	2 2		

1985.02.20

E

F9

F 10


F-3

Handle lever • Switch • Cable

Levier de poignée • Interrupteur • Câble

Lenkstangenhebel • Schalter • Kabel

Palanca de manubrio • Puente superior

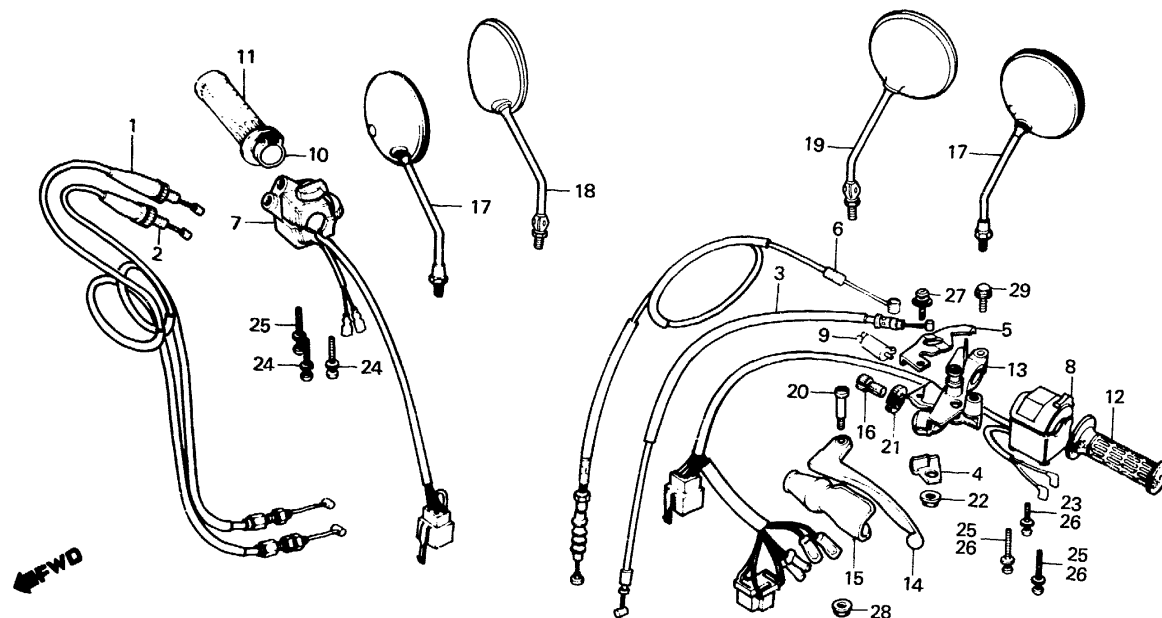

BMA6-23B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX4u0 Fc F2c	Serial No.	Area code
CABLE COMP., THROTTLE (ONE OR ALL)	0.5	1	17910-MA6-000	CABLE COMP. A, THROTTLE	1 1		
• SWITCH ASSY., STARTER KILL		2	17920-MA6-000	CABLE COMP. B, THROTTLE	1 1		
• SWITCH ASSY., WINKER		3	17950-MA6-000	CABLE COMP., CHOKE	1 1		
CABLE COMP., CHOKE	0.3	4	17963-422-000	HOLDER, CHOKE CABLE	1 1		
• CABLE COMP., CLUTCH		5	17964-MA2-000	COVER, CHOKE ARM	1 1		
• PIPE, THROTTLE GRIP		6	22870-MA6-000	CABLE COMP., CLUTCH	1 1		
• BRACKET ASSY., HANDLE LEVER		7	35150-MA6-003	SWITCH ASSY., STARTER KILL	1 1		
SWITCH COMP., FR. LEVER	0.2	8	35200-MA6-003	SWITCH ASSY., WINKER	1 1		
GRIP, R. HANDLE	0.1	9	35330-413-003	SWITCH COMP., FR. LEVER	1 1		
• GRIP, L. HANDLE		10	53141-422-000	PIPE, THROTTLE GRIP	1 1		
• LEVER, L. STEERING HANDLE		11	53165-422-000	GRIP, R. HANDLE	1 1		
		12	53166-422-000	GRIP, L. HANDLE	1 1		
		13	53170-MA2-000	BRACKET ASSY., HANDLE LEVER	1 1		


F-3

Handle lever • Switch • Cable

Levier de poignée • Interrupteur • Câble

Lenkstangenhebel • Schalter • Kabel

Palanca de manubrio • Puente superior

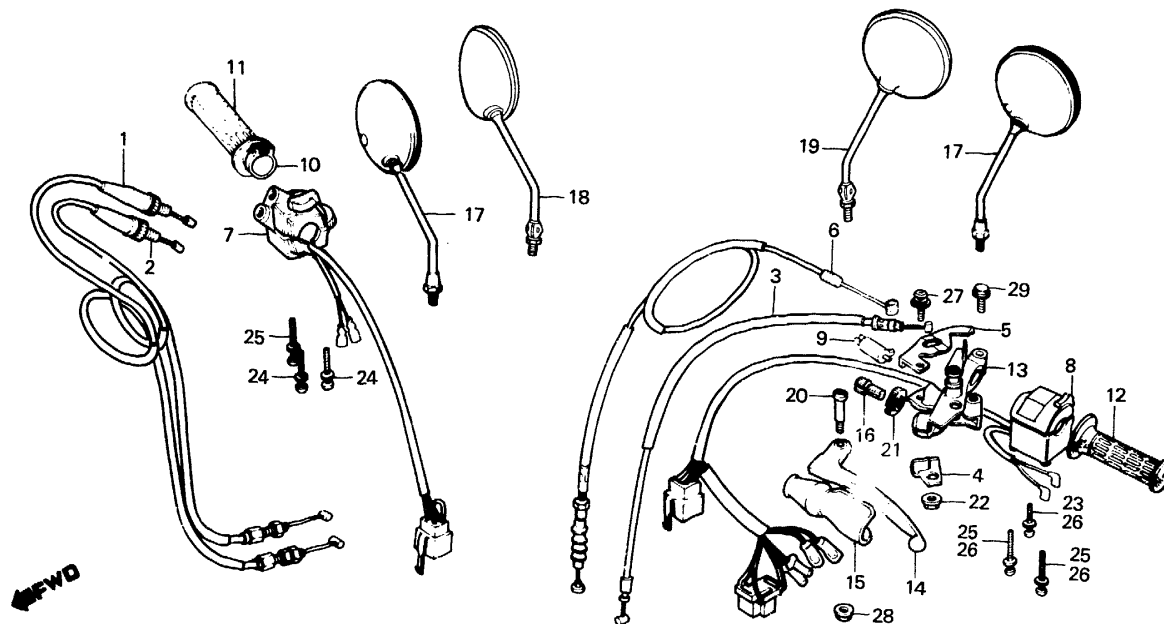

BMA6-23B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No.		Serial No.	Area code
					CBX400 Fc	F2c		
		14	53178-MA6-000	LEVER, L. STEERING HANDLE	1	1		
		15	53180-422-010	BOOT, HANDLE LEVER	1	1		
		16	53192-425-000	BOLT, CABLE ADJUSTING	1	1	2007137	2007136
			53192-268-000	BOLT, WIRE ADJUSTING	1	1		
		17	88110-MA6-003	MIRROR, BACK	2			ED,U
		18	88110-MA6-620	MIRROR, R. BACK	1			F
		19	88120-MA6-620	MIRROR, L. BACK	1			F
		20	90113-438-000	BOLT, L. STEERING HANDLE LEVER	1	1		
				PIVOT				
		21	90321-422-000	NUT, FIXING	1	1	2007137	2007136
			90321-MA6-750	NUT, FIXING	1	1		
		22	90370-MA2-000	NUT-WASHER, 5MM	1	1		
		23	93891-05028-07	SCREW-WASHER, 5X28	1			
		24	93891-05032-07	SCREW-WASHER, 5X32	2	2		
		25	93891-05045-07	SCREW-WASHER, 5X45	3	1		
		26	93891-05050-07	SCREW-WASHER, 5X50		3		
		27	93892-05018-07	SCREW-WASHER, 5X18	1	1		

F 12


F-3

Handle lever • Switch • Cable

Levier de poignée • Interrupteur • Câble

Lenkstangenhebel • Schalter • Kabel

Palanca de manubrio • Puente superior

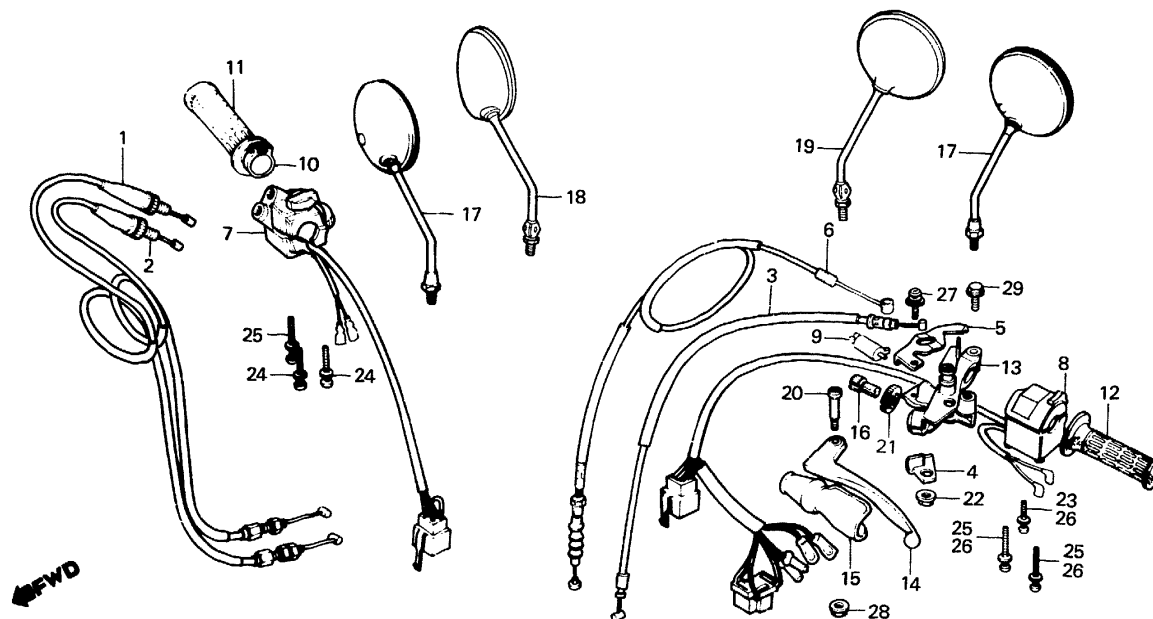

BMA6-23B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		28	94002-06000-0S	NUT, HEX., 6MM	1 1		
		29	95700-06025-07	BOLT, FLANGE, 6X25	1 1		

F 13



F-4

Front brake master cylinder

Maître cylindre de frein avant

Vorderradbremse-Hauptzylinder

Cilindro maestro de freno delantero

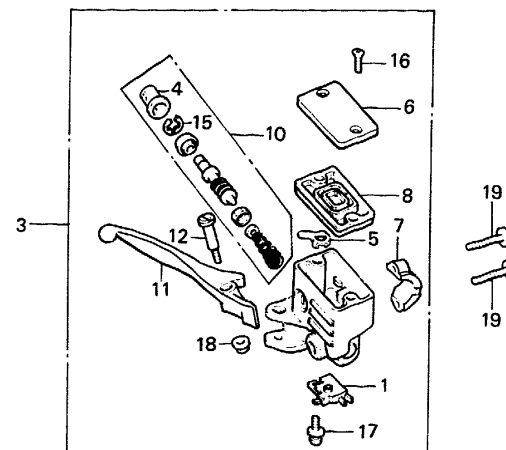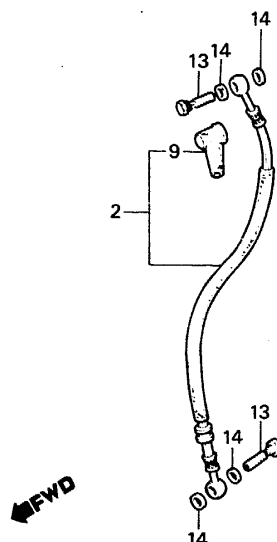

BMA6-24A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
SWITCH ASSY., FR. STOP	0.1	1	35340-MA5-671	SWITCH ASSY., FR. STOP	1 1		
• DIAPHRAGM		2	45125-MA6-003	HOSE ASSY., FR. BRAKE	1 1		
• LEVER COMP., R. STEERING		3	45500-MA6-621	CYLINDER ASSY., FR. BRAKE	1 1		
	HANDLE			MASTER			
HOSE ASSY., FR. BRAKE	0.3	4	45504-410-003	BOOT COMP.	1 1		
• CYLINDER ASSY., FR. BRAKE		5	45512-MA6-006	PROTECTOR	1 1		
	MASTER						
CYLINDER SET, MASTER	0.4	6	45513-MA7-006	CAP	1 1		
		7	45517-MA5-671	HOLDER, MASTER CYLINDER	1 1		
		8	45520-MA5-671	DIAPHRAGM	1 1		
		9	45522-422-000	BOOT, MASTER CYLINDER	1 1		
		10	45530-471-831	CYLINDER SET, MASTER	1 1		
		11	53175-MA6-006	LEVER COMP., R. STEERING	1 1		
		12	90114-MA5-671	BOLT, R. STEERING HANDLE LEVER	1 1		
				HANDLE PIVOT			
		13	90145-961-000	BOLT, OIL, 10X22	2 2		
		14	90545-300-000	WASHER, OIL BOLT	4 4		
		15	90651-MA5-671	CIRCLIP	1 1		

F 14



F-4

Front brake master cylinder

Maître cylindre de frein avant

Vorderradbremse-Hauptzylinder

Cilindro maestro de freno delantero

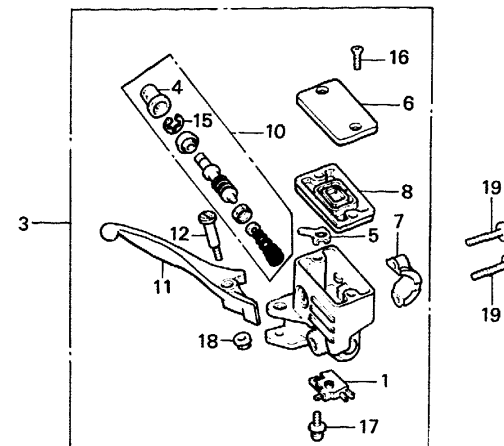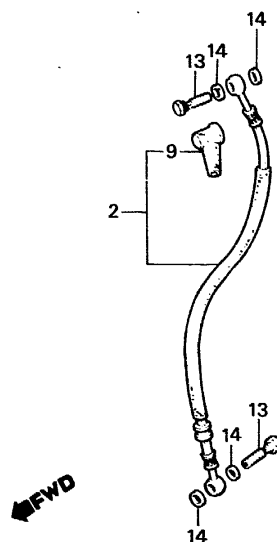

BMA6-24A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		16	93600-04012-1G	SCREW, FLAT, 4X12	2 2		
		17	93893-04012-18	SCREW-WASHER, 4X12	1 1		
		18	94050-06000	NUT, FLANGE, 6MM	1 1		
		19	96000-06025-07	BOLT, FLANGE, 6X25	2 2		

F 15


F-5

Handle pipe • Top bridge

Guidon • Haut de fourche

Lenkrohr • Obere Brücke

Tubo do manubrio • Puente superior

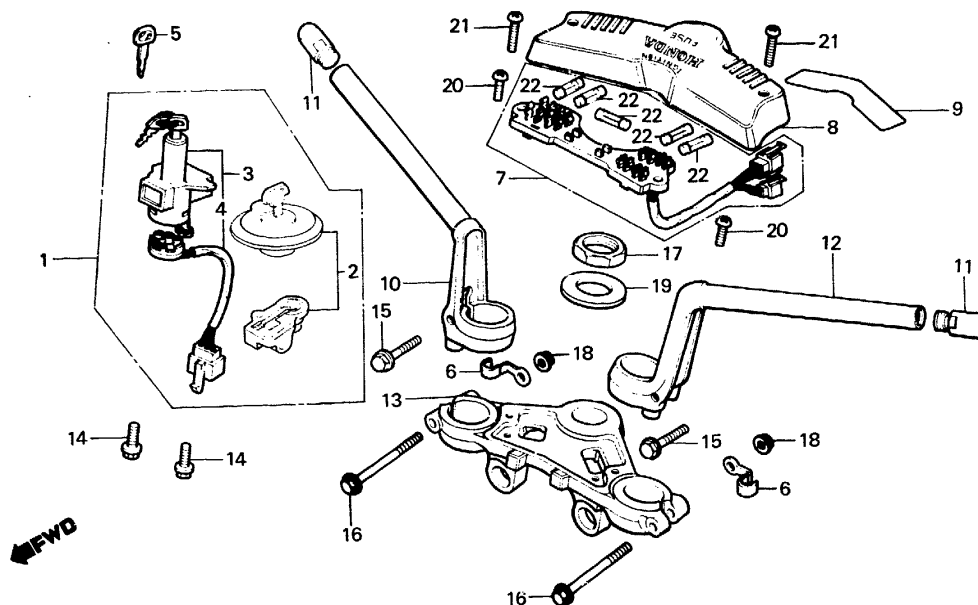

BMA6-25D

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
KEY SET	0.4	1	35010-MA6-000	KEY SET	1 1		F,U
• PIPE, STEERING HANDLE (ADD 0.3 FOR EACH.)		2	35010-MA6-630	KEY SET	1 1		ED
SWITCH ASSY., COMBINATION	0.3	3	35100-MA6-007	SWITCH ASSY., COMBINATION	1 1		F,U
• BASE COMP., CONTACT		4	35100-MA6-631	SWITCH ASSY., COMBINATION	1 1		ED
• PLATE ASSY., FUSE		5	35101-MA6-007	BASE COMP., CONTACT	1 1		
BRIDGE, FORK TOP	0.6	5	35121-MA6-811	KEY, BLANK (TYPE 1)	(1) (1)		
			35122-MA6-811	KEY, BLANK (TYPE 2)	(1) (1)		
		6	35210-MA6-000	CLAMP, SWITCH CORD	2 2		
		7	38200-422-005	PLATE ASSY., FUSE	1 1		
			38200-MA6-005	PLATE ASSY., FUSE	1 1	2007137	
		8	38210-MA6-000	COVER, FUSE PLATE	1 1		
		9	38215-438-300	LABEL, FUSE	1 1		
			38215-438-620	LABEL, FUSE (FRENCH)	1 1		F
		10	53100-MA6-600	PIPE, R. STEERING HANDLE	1 1		

F 16


F-5

Handle pipe • Top bridge

Guidon • Haut de fourche

Lenkrohr • Obere Brücke

Tubo do manubrio • Puente superior

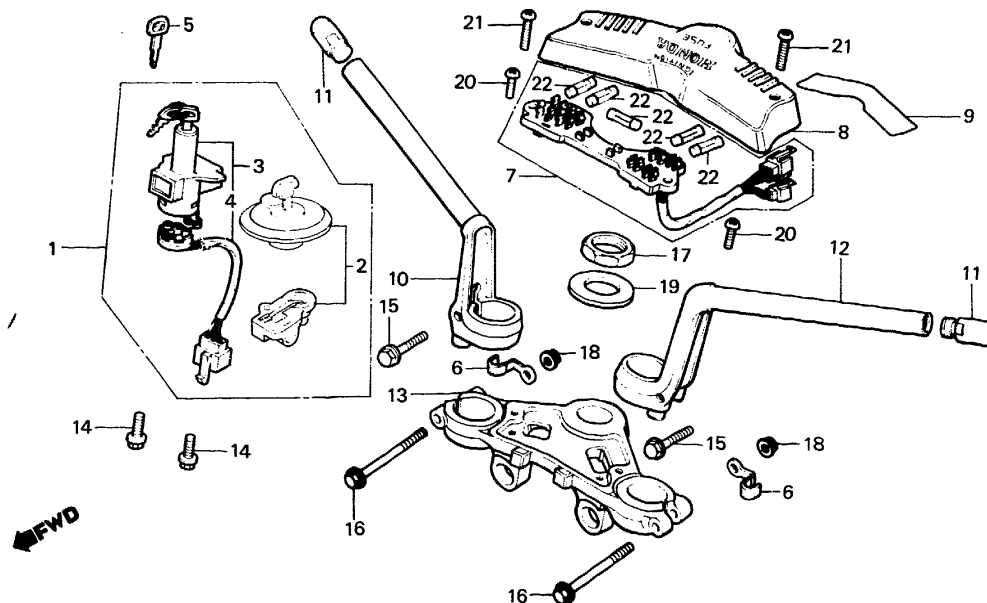

BMA6-25D

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		11	53105-MA6-000	WEIGHT, HANDLE	2 2		
		12	53150-MA6-600	PIPE, L. STEERING HANDLE	1 1		
		13	53231-MA6-000	BRIDGE, FORK TOP	1 1		
			53230-MA6-750	BRIDGE, FORK TOP	1 1	2007137	2007136
		14	90105-MA6-000	BOLT, FLANGE, 8X19	2 2		
		15	90153-438-000	BOLT, STEERING HANDLE SETTING	2 2		
		16	90155-369-000	BOLT, FLANGE, 7X54	2 2		
			90155-MA6-000	BOLT, FLANGE, 7X54	2 2	2007137	2007136
		17	90304-425-000	NUT, STEERING STEM	1 1		
		18	90355-369-000	NUT, FLANGE, 7MM	2 2		
			90355-MA6-000	NUT, FLANGE, 7MM	2 2	2007137	2007136
		19	90503-283-000	WASHER, STEERING STEM	1 1		
		20	93500-05016-0A	SCREW, PAN, 5X16	2 2		
		21	93500-05025-0G	SCREW, PAN, 5X25	2 2		




F-5

Handle pipe • Top bridge

Guidon • Haut de fourche


Lenkrohr • Obere Brücke

Tubo do manubrio • Puente superior

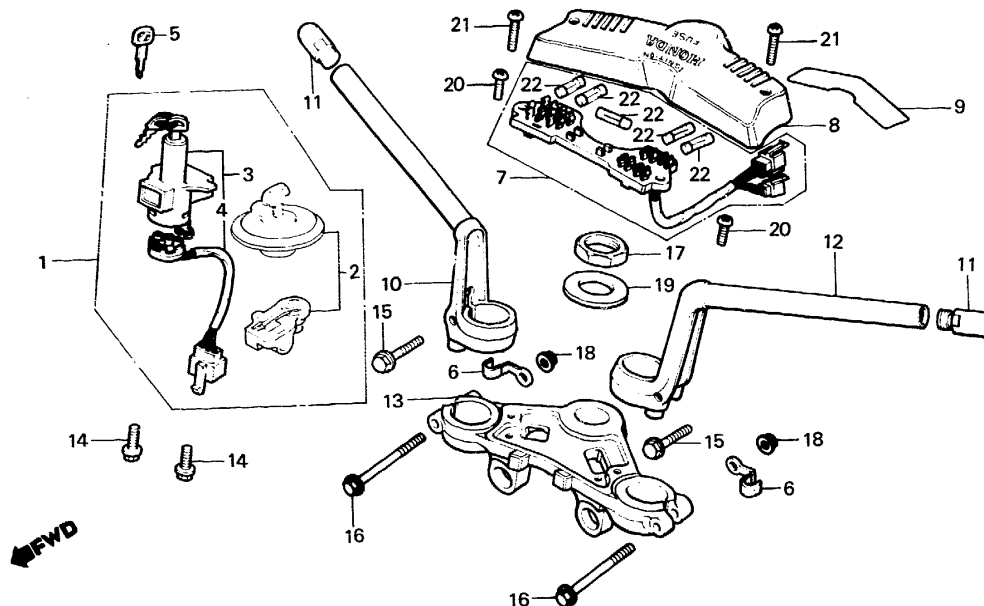

BMA6-25D

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		22	98200-21500	FUSE B (15A)	5 5		




F-6

Steering stem

Tige de direction

Steuerkopfschaft

Varilla de dirección

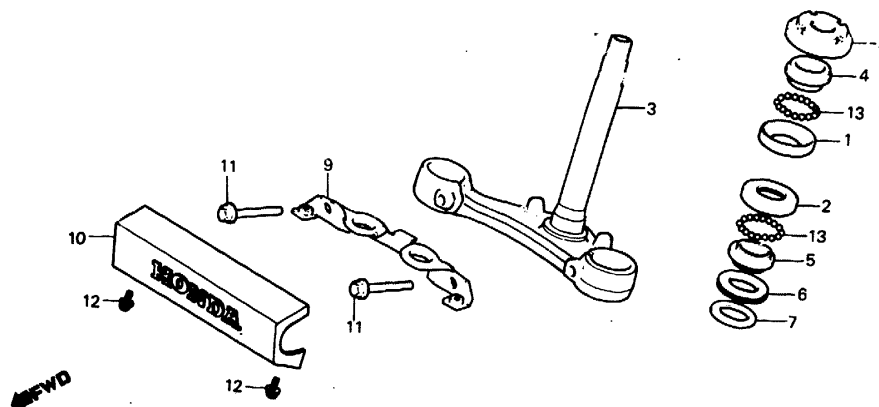

BMA6-26A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
RACE, STEERING BALL (ONE OR ALL)	1.1	1	50301-268-000	RACE, STEERING TOP BALL	1 1		
• RACE, STEERING BOTTOM CONE		2	50302-268-000	RACE, STEERING BOTTOM BALL	1 1		
STEM COMP., STEERING	1.2	3	53200-MA6-000	STEM COMP., STEERING	1 1	2007136	F,U
RACE, STEERING TOP CONE	0.5		53200-MA6-610	STEM COMP., STEERING	1 1	2007136	ED
• THREAD COMP., STEERING HEAD			53200-KE8-000	STEM COMP., STEERING	1 1	2007137	F,U
			53200-MA6-640	STEM COMP., STEERING	1 1	2007137	ED
STAY, FR.	TOP	4	53211-268-000	RACE, STEERING TOP CONE	1 1		
	0.1	5	53212-250-000	RACE, STEERING BOTTOM CONE	1 1		
		6	53214-250-000	DUST SEAL, STEERING HEAD	1 1		
		7	53215-250-000	WASHER, STEERING HEAD	1 1		
		8	53220-286-000	THREAD COMP., STEERING HEAD	1 1		ED,F
			53220-KE8-010	THREAD COMP., STEERING HEAD	1		U

G 3


F-6

Steering stem

Tige de direction


Steuerkopfschaft

Varilla de dirección

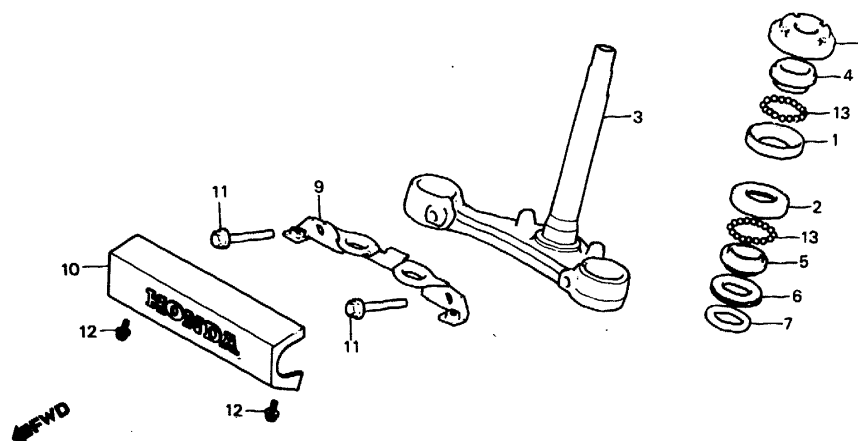

BMA6-26A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		9	61315-MA6-000	STAY, FR.	1 1		
		10	61401-MA6-620	COVER, FR.	1		
		11	93481-08040-00	BOLT-WASHER, 8X40	2 2		
		12	93891-05010-07	SCREW-WASHER, 5X10	2		
		13	96211-08000	BALL, STEEL, #8 (1/4)	37 37		




F-7

Front fender

Garde-boue avant

Vorderer Kotflügel

Parafango delantero

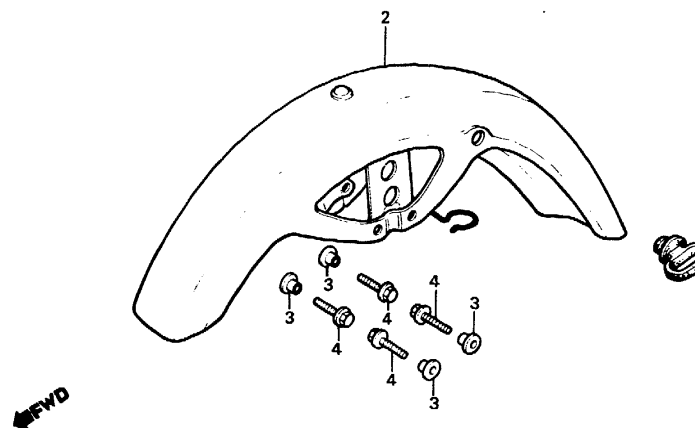

BMA6-27

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
FENDER COMP., FR.	0.2	1	45451-471-000	GROMMET, WIRE	1 1		
		2	61100-MA6-000ZA	FENDER COMP., FR. *R-110*	1 1	2004552	
			61100-MA6-000ZD	FENDER COMP., FR. *NH-121P.A*	1 1	2004552	
			61100-MA6-010ZA	FENDER COMP., FR. *R-110*	1 1	2004553	
			61100-MA6-010ZD	FENDER COMP., FR. *NH-121P.A*	1 1	2004553	
		3	61101-441-000	COLLAR, FR. FENDER SETTING	4 4	2004552	
			61104-MA6-000	COLLAR, FR. FENDER SETTING	4 4	2004553	
		4	95700-06016-08	BOLT, FLANGE, 6X16	4 4		

G 5


F-8

Front fork

Fourche avant

Vordergabel

Horquilla delantero

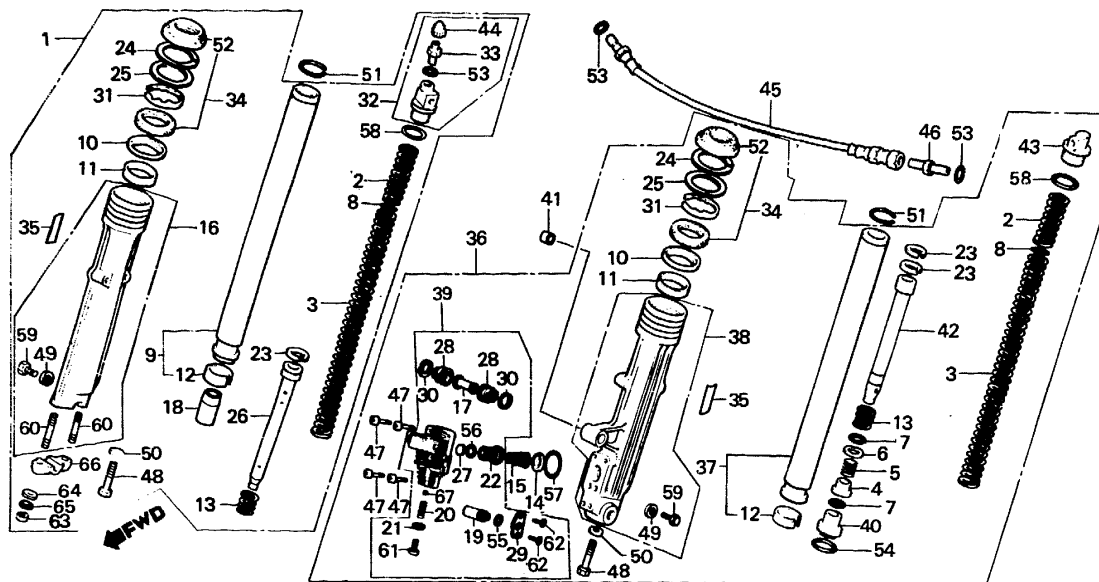

BMA6-28A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
FORK ASSY., FR. (ADD 0.2 FOR EACH.)	0.6	1	51400-MA6-621	FORK ASSY., R. FR.	1 1		
SPRING A, FR. CUSHION (ADD 0.2 FOR EACH.)	0.3	2	51401-MA6-003	SPRING A, FR. CUSHION	2 2		
BOLT ASSY., FR. FORK PIPE COMP., FR. FORK (ADD 0.6 FOR EACH.)	0.9	3	51402-MA6-003	SPRING B, FR. CUSHION	2 2		
CASE COMP., BOTTOM (ADD 0.5 FOR EACH.)		4	51403-MA6-003	VALVE, OIL LOCK	1 1		
SEAL SET, FR. FORK (ADD 0.5 FOR EACH.)		5	51404-MA6-003	SPRING, OIL LOCK VALVE	1 1		
PACKING	0.4	6	51405-MA6-003	SEAT, SPRING	1 1		
ROD, ADJUSTER		7	51405-MC7-003	RING, STOPPER	2 2		
VALVE COMP., AIR	0.1	8	51406-MA6-003	PLATE, SPRING JOINT	2 2		
CASE COMP., L. PISTON	0.5	9	51410-MA6-003	PIPE COMP., FR. FORK	1 1		
HOSE COMP., FR. FORK JOINT	0.2	10	51412-422-003	RING, BACK UP	2 2		
		11	51414-469-003	BUSH, GUIDE (SHOWA)	2 2		
		12	51415-MA6-003	BUSH, SLIDER	2 2		
		13	51416-461-003	SPRING, REBOUND	2 2		
		14	51417-MA6-003	PACKING	1 1		
		15	51418-MA6-003	SPRING, PISTON	1 1		
		16	51421-MA6-003	CASE COMP., R. BOTTOM	1 1		
		17	51423-MA6-003	COLLAR, PISTON	1 1		

G 6


F-8

Front fork

Fourche avant

Vordergabel

Horquilla delantera

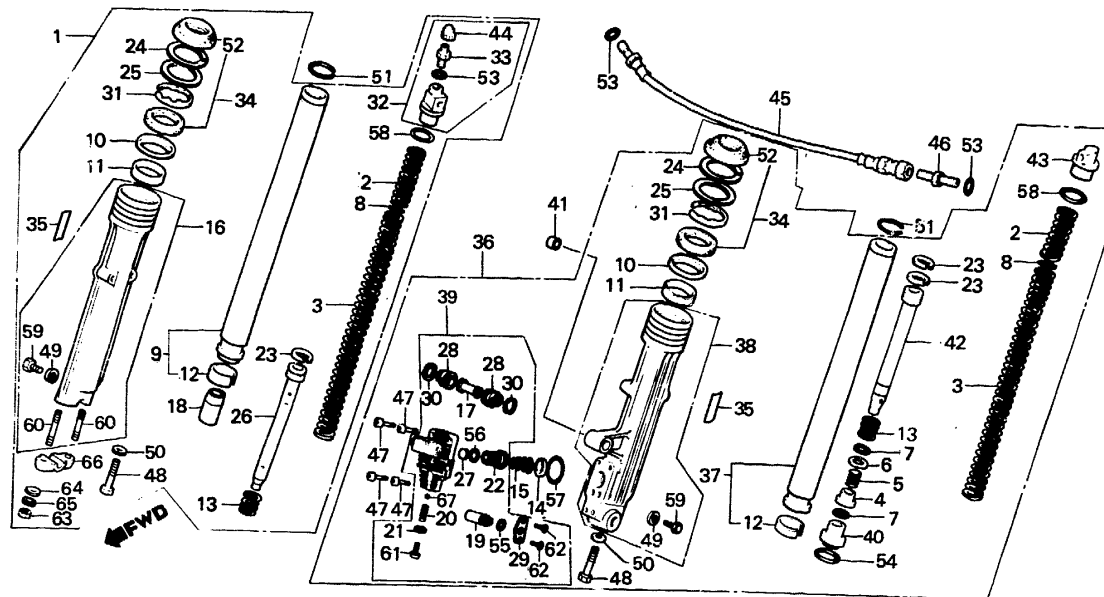

BMA6-28A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		18	51432-MA6-003	PIECE, OIL LOCK	1 1		
		19	51433-MC7-003	ROD, ADJUSTER	1 1		
		20	51434-MC7-003	SPRING, CLICK	1 1		
		21	51435-MC7-003	WASHER, SPECIAL, 5MM	1 1		
		22	51436-MA6-003	PISTON	1 1		
		23	51437-461-003	RING, PISTON	3 3		
		24	51438-MA6-003	HOLDER, GREASE (SHOWA)	2 2	2004433	
		25	51439-MA6-003	WASHER, HOLDER (SHOWA)	2 2	2004433	
		26	51440-MA6-621	PIPE, SEAT	1 1		
			51440-MA6-003	PIPE, SEAT	1 1	2003300	2003299
		27	51441-MC7-003	RUBBER, STOPPER	1 1		
		28	51442-MC7-003	BOOT, PISTON CASE	2 2		
		29	51443-MC7-003	WASHER, R. SIDE	1 1		
		30	51445-MC7-003	HOLDER, BOOT	2 2		
		31	51447-469-003	CIRCLIP, INTERNAL, 51.5	2 2		
		32	51450-MA6-003	BOLT ASSY., FR. FORK	1 1		
		33	51456-469-013	VALVE COMP., AIR (SHOWA)	1 1		

G 7


F-8

Front fork

Fourche avant

Vordergabel

Horquilla delantero

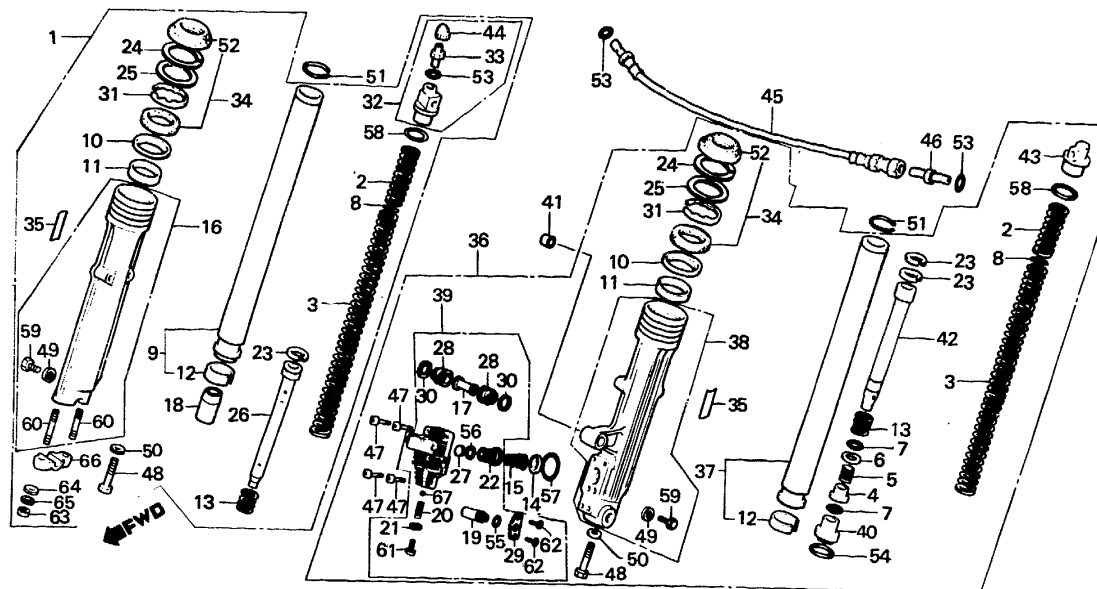

BMA6-28A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		34	51490-MA6-305	SEAL SET, FR. FORK	2 2	2003299 2003300	
		35	51495-MA6-300	MARK, FR. FORK (AIR SUS)	2 2		
		36	51500-MA6-621	FORK ASSY., L. FR.	1 1		
		37	51510-MA6-621	PIPE COMP., FR. FORK	1 1		
			51510-MA6-003	PIPE COMP., L. FR. FORK	1 1		
		38	51521-MA6-003	CASE COMP., L. BOTTOM	1 1		
		39	51522-MA6-003	CASE COMP., L. PISTON	1 1		
		40	51523-MA6-003	PIECE B, OIL LOCK	1 1		
		41	51532-MA6-300	BUSH, PIVOT	2 2		
		42	51540-MA6-003	PIPE B, SEAT	1 1		
		43	51555-MA6-003	BOLT, L. FR. FORK	1 1		
		44	52425-381-771	CAP, AIR VALVE	1 1		
		45	53137-MB7-611	HOSE COMP., FR. FORK JOINT	1 1		
		46	53139-460-840	CONNECTOR	1 1		
		47	90116-MC7-003	BOLT, SOCKET, 6MM	4 4		

G 8


F-8

Front fork

Fourche avant

Vordergabel

Horquilla delantero

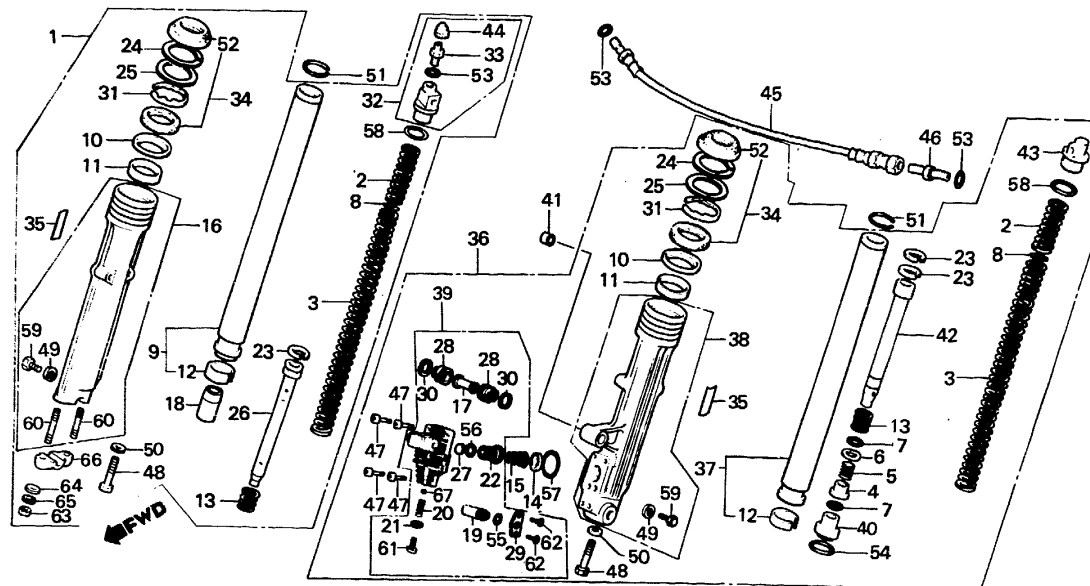

BMA6-28A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		48	90116-283-010	BOLT, SOCKET, 8MM	2 2		
		49	90543-273-000	PACKING, FR. FORK DRAIN COCK	2 2		
		50	90544-283-000	WASHER, SPECIAL, 8MM	2 2		
		51	90601-469-000	RING, SNAP, 31.4MM	2 2		
		52	91254-434-003	DUST SEAL, 35MM	2 2		
		53	91301-469-003	O-RING, 5.8X1.9	3 3		
		54	91304-MA6-003	O-RING, 31.5X2.0 (SHOWA)	1 1		
		55	91304-MC7-003	O-RING B, 6.8X2.5	1 1		
		56	91308-MC7-003	O-RING D, 13.8X2.4	1 1		
		57	91309-MC7-003	O-RING C, 54.4X3.1	1 1		
		58	91356-428-003	O-RING, 25.7X28	2 2		
		59	92000-06008-0A	BOLT, HEX., 6X8	2 2		
		60	92700-08050-3B	BOLT, STUD, 8X50	2 2		
		61	93500-05010-1A	SCREW, PAN, 5X10	1 1		
		62	93600-04010-1B	SCREW, FLAT, 4X10	2 2		
		63	94030-08000	NUT, HEX., 8MM	2 2		

G 9


F-8

Front fork

Fourche avant

Vordergabel

Horquilla delantero

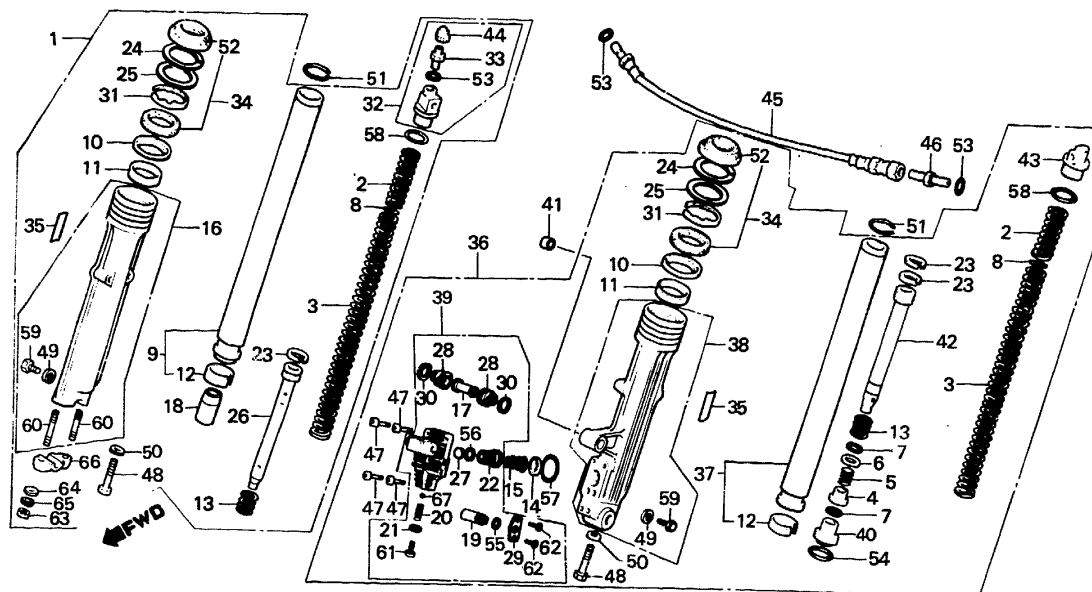

BMA6-28A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		64	94101-08000	WASHER, PLAIN, 8MM	2 2		
		65	94111-08000	WASHER, SPRING, 8MM	2 2		
		66	95014-41100	HOLDER 1B, FR. FORK AXLE	1 1		
		67	96211-05000	BALL, STEEL, #5 (5/32)	1 1		

G 10


F-9

Front brake caliper

Etrier de frein avant

Vorderradbremssattel

Calibrador de freno delantero

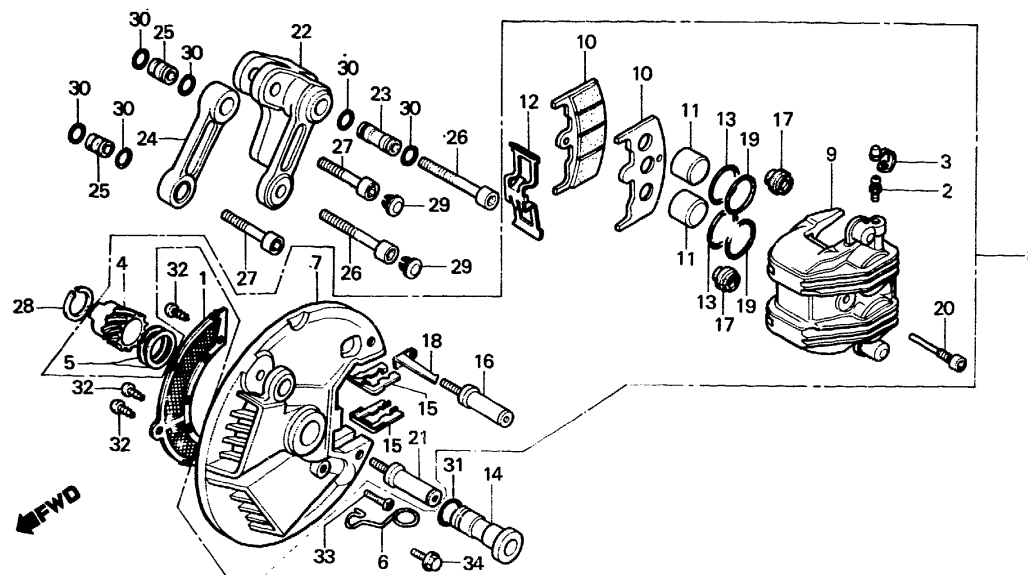

BMA6-29E

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
NET, CALIPER BRACKET	0.4	1	43150-MA6-000	NET, CALIPER BRACKET	1 1		
• GEAR, SPEEDOMETER		2	43352-568-003	SCREW, BLEEDER	1 1		
BRACKET SUB COMP., FR. BRAKE	0.5	3	43353-461-771	CAP, BLEEDER	1 1		
CALIPER ASSY., L. FR.	0.6	4	44806-MA6-003	GEAR, SPEEDOMETER	1 1		
BODY, L. FR. CALIPER	0.9	5	44809-MA6-000	WASHER, SPEEDOMETER GEAR	2 2		
PAD COMP.	0.2						
• ARM, TORQUE		6	44832-MA6-000	CLAMP, SPEEDOMETER CABLE	1 1		
PISTON	0.7	7	451A1-MA6-006	BRACKET COMP., L. FR.	1 1	2004432	
(ADD 0.1 FOR EACH.)			45010-MA6-305	BRACKET COMP., L. FR.	1 1	2004433	2007136
(INC. RELATIVE PART)			45010-MA6-315	BRACKET SUB COMP., FR. BRAKE	1 1	2007137	
ROD COMP., TENSION	0.1	8	45100-MA6-006	CALIPER ASSY., L. FR.	1 1		2004432 ED,F
				(NISSHIN JB)			
			45100-MA6-007	CALIPER ASSY., L. FR.	1 1		2004432
				(NISSHIN ASK)			
			45100-MA6-016	CALIPER ASSY., L. FR.	1 1	2004433	2007136 ED,F
				(NISSHIN JB)			
			45100-MA6-017	CALIPER ASSY., L. FR.	1 1	2004433	2007136
				(NISSHIN ASK)			

G 11


F-9

Front brake caliper

Etrier de frein avant

Vorderradbremssattel

Calibrador de freno delantero

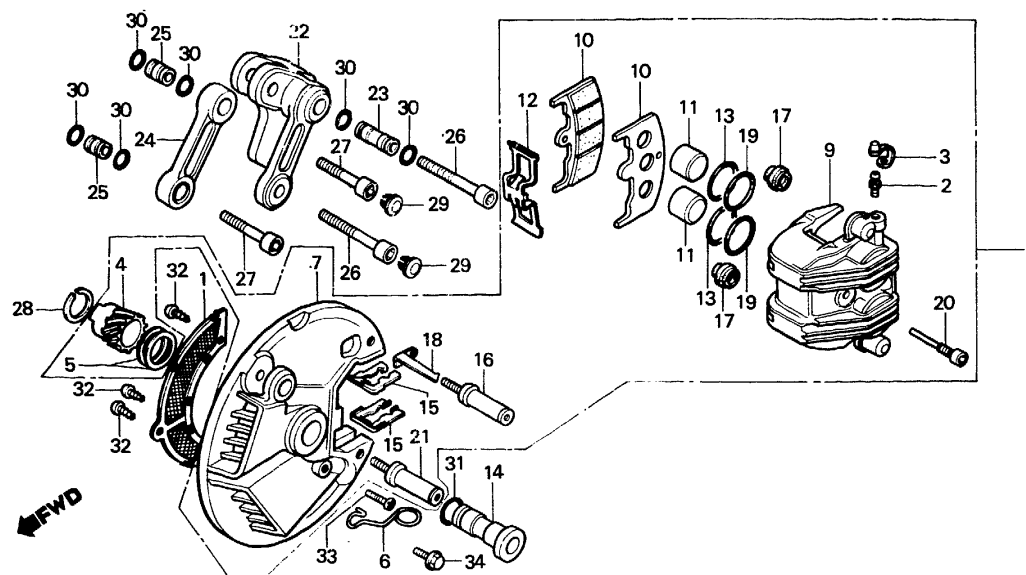

BMA6-29E

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
			45100-MA6-027	CALIPER ASSY., L. FR.	1 1	2007137	
				(NISSHIN ASK)			
		9	45101-MA6-006	BODY, L. FR. CALIPER	1 1	2007136	
			45101-MA6-016	BODY, L. FR. CALIPER	1 1	2007137	
		10	45105-MA6-004	PAD COMP. (JB)	2 2		ED,F
			45105-MA6-007	PAD COMP. (ASK)	2 2		
		11	45107-MA6-006	PISTON	2 2		
		12	45108-MA6-006	SPRING, PAD	1 1		
		13	45109-961-006	DUST SEAL	2 2		
		14	45111-MA6-000	COLLAR, SIDE	1 1		
		15	45112-MA6-006	RETAINER, 11T	2 2		
		16	45131-MA6-006	PIN, BOLT	1 1		
		17	45133-MA6-006	BOOT	2 2		
		18	45145-MA7-006	INDICATOR, L. FR. BRAKE	1 1	2007137	
		19	45209-961-006	SEAL, PISTON	2 2		
		20	45215-MA6-006	PIN, HANGER	1 1		
		21	45231-MA6-006	PIN, BOLT	1 1		
		22	51530-MA6-000	ARM, TORQUE	1 1		

G 12


F-9

Front brake caliper

Etrier de frein avant

Vorderradbremssattel

Calibrador de freno delantero

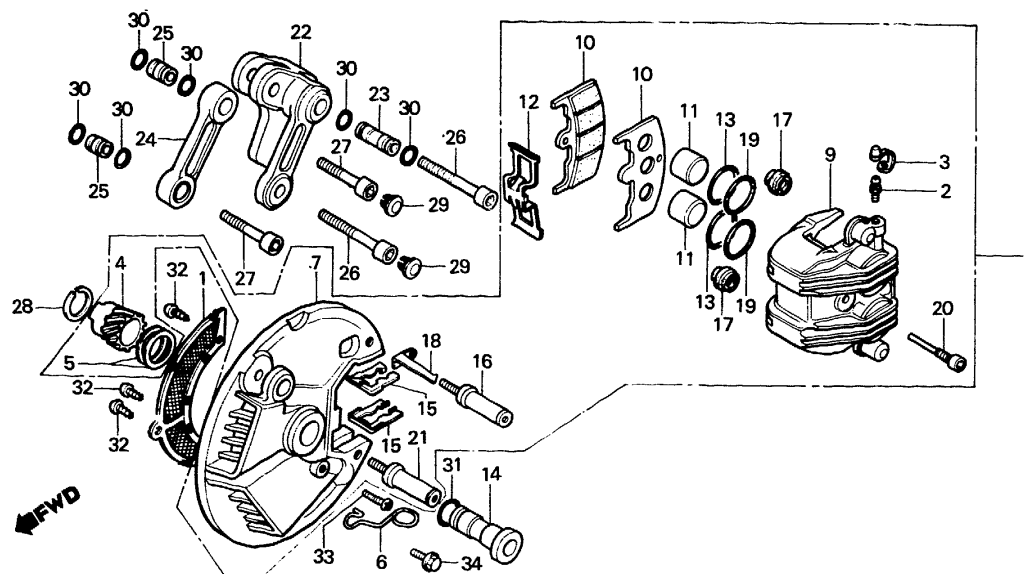

BMA6-29E

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CbX-400 Fc F2c	Serial No.	Area code
		23	51533-MA6-000	COLLAR, TORQUE ARM	1 1		
		24	51535-MA6-000	ROD COMP., TENSION	1 1		
		25	51536-MA6-000	COLLAR, TENSION ROD	2 2		
		26	90120-MA6-000	BOLT, SOCKET, 8X46	2 2		
		27	90130-MA6-000	BOLT, SOCKET, 8X26	2 2		
		28	90651-MA6-000	CIRCLIP, 20MM	1 1		
		29	90851-MA6-000	PLUG, HOLE	4 4		
		30	91301-671-671	O-RING, 1.9X11	6 6		
		31	91303-MA6-000	O-RING, 19.8X1.9	1 1		
		32	93500-04006-1G	SCREW, PAN, 4X6	3 3		
		33	93700-05025-0A	SCREW, OVAL, 5X25	1 1		
		34	95700-06010-17	BOLT, FLANGE, 6X10	1 1	2007136	
			95700-06010-07	BOLT, FLANGE, 6X10	1 1	2007137	

G 13


F-10

Front wheel

Roue avant

Vorderrad

Rueda delantera

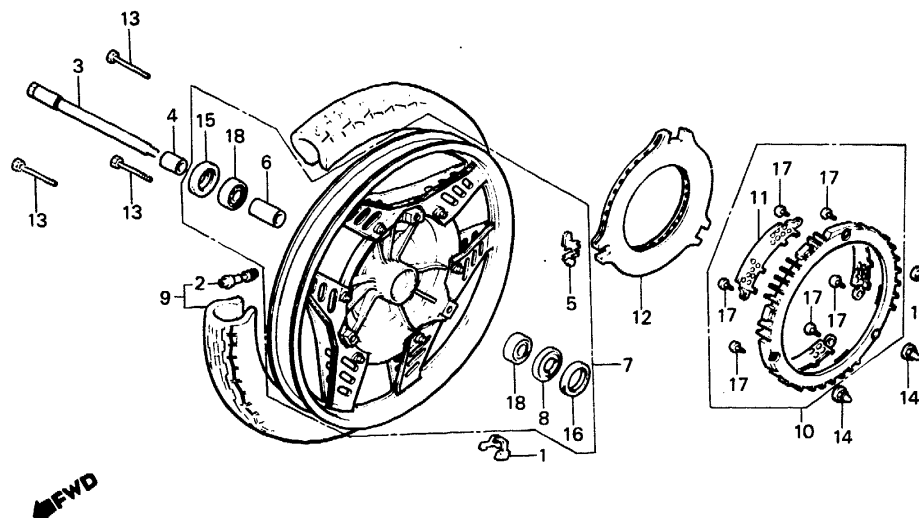

BMA6-30

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
WEIGHT, BALANCE	0.8	1	42704-MC7-000	WEIGHT, BALANCE (10G)	N N		
AXLE, FR. WHEEL	0.3		42705-MC7-000	WEIGHT, BALANCE (20G)	N N		
COLLAR, FR. AXLE DISTANCE	0.5		42706-MC7-000	WEIGHT, BALANCE (30G)	N N		
• BEARING, RADIAL BALL, 6302Z (ADD 0.1 FOR EACH.)		2	42753-425-003	VALVE, RIM (BS)	1 1	2003907	
WHEEL COMP., FR.	1.1		42753-425-004	VALVE, RIM (DUNLOP)	1 1		
• TIRE ASSY., FR.		3	44301-MA6-000	AXLE, FR. WHEEL	1 1		
COVER COMP., FR. DISK	0.4	4	44311-413-000	COLLAR, FR. WHEEL	1 1		
• PLATE, FR. BRAKE DISK		5	44602-MA6-000	SPRING, DISK PLATE	3 3		
• OIL SEAL, 26X42X7		6	44620-286-000	COLLAR, FR. AXLE DISTANCE	1 1		
		7	44650-MA6-620	WHEEL COMP., FR.	1 1		
		8	44680-410-000	44650-MA6-621	1 1		
		9	44710-MA6-003	RETAINER, GEAR BOX	1 1	2003907	
				TIRE ASSY., FR. (3.60H18-4PR BS)	1 1		
			44710-MA6-004	TIRE ASSY., FR. (3.60H18-4PR DUNLOP)	1 1		
		10	45140-MA6-000	COVER COMP., FR. DISK	1 1	2007136	
			45140-MA6-750	COVER COMP., FR. DISK	1 1	2007137	

G 14


F-10

Front wheel

Roue avant

Vorderrad

Rueda delantera

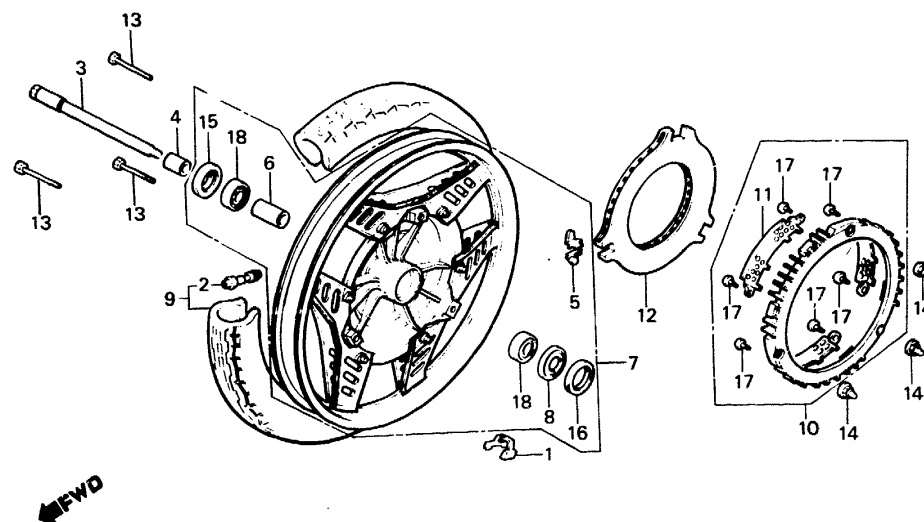

BMA6-30

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc FZc	Serial No.	Area code
		11	45142-MA6-000	NET, FR. DISK COVER	3 3		
		12	45251-MA6-000	PLATE, FR. BRAKE DISK	1 1		
		13	90128-MA6-000	BOLT, HEX., 6X73	3 3		2007136
			90128-KE8-000	BOLT, SOCKET, 6X66.5	3 3	2007137	
		14	90301-MA6-003	NUT, FLANGE CAP, 6MM	3 3		2007136
			90302-KE8-003	NUT, CAP, 6MM	3 3	2007137	
		15	91252-230-005	OIL SEAL, 26X42X7	1 1		
		16	91258-410-006	DUST SEAL, 40X50X5 (NIPPON)	1 1		
			91258-410-013	DUST SEAL, 40X50X5 (ARAI)	1 1		
		17	93500-04006-1G	SCREW, PAN, 4X6	6 6		
		18	96120-63020-10	BEARING, RADIAL BALL, 6302Z	2 2		

G 15


F-11

Rear brake master cylinder

Maître cylindre de frein arrière

Hinterradbremse-Hauptzylinder

Cilindro mastro trasero

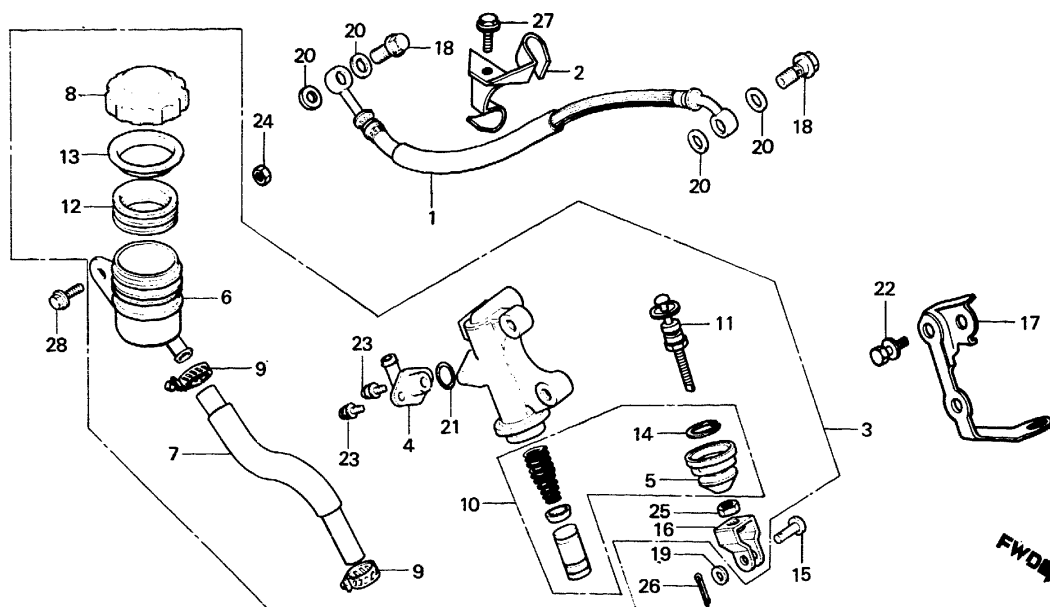

BMA6-31

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
HOSE, RR. BRAKE	0.4	1	43310-MA6-003	HOSE, RR. BRAKE	1 1		
CYLINDER ASSY., RR. BRAKE	0.5	2	43437-MA6-000	CLAMPER A, RR. BRAKE HOSE	1 1		
		3	43500-MA6-621	CYLINDER ASSY., RR. BRAKE	1 1		
CUP, MASTER CYLINDER OIL	0.2	6	43511-MA6-006	CUP, MASTER CYLINDER OIL	1 1		
HOSE, MASTER CYLINDER	0.6	7	43512-MA6-000	HOSE, MASTER CYLINDER	1 1		
PISTON SET	0.1	8	43513-461-771	CAP, OIL CUP	1 1		
DIAPHRAGM		9	43514-445-771	CLAMP, MASTER CYLINDER OIL	2 2		
		10	43520-MA3-641	PISTON SET	1 1		
		11	43530-MB9-006	ROD COMP., PUSH	1 1		
		12	45520-300-000	DIAPHRAGM	1 1		
		13	45521-300-010	PLATE, DIAPHRAGM	1 1		
		14	46182-500-013	CIRCLIP	1 1		
		15	46503-371-000	PIN, BRAKE ROD	1 1		

G 16


F-1 1

Rear brake master cylinder

Maître cylindre de frein arrière

Hinterradbremse-Hauptzylinder

Cilindro mastro trasero

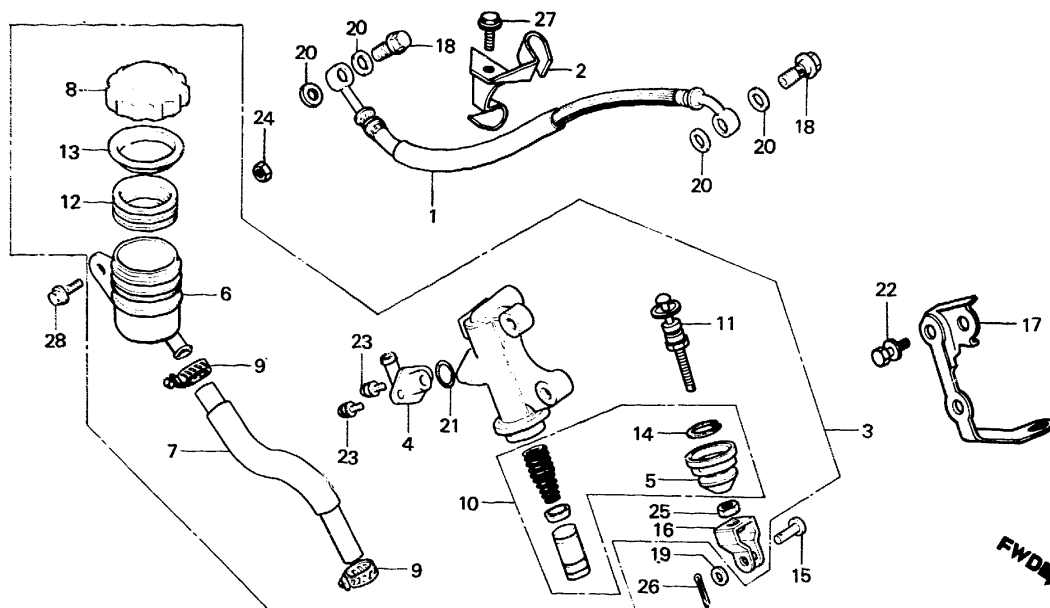

BMA6-31

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No.		Serial No.	Area code
					CBX400 Fc	FZc		
		16	46504-445-771	JOINT, BRAKE ROD	1	1		
		17	50146-MA6-000	STAY, STOP SWITCH	1	1		
		18	90145-961-000	BOLT, OIL, 10X22	2	2		
		19	90501-310-000	WASHER, 7X12	1	1		
		20	90545-300-000	WASHER, OIL BOLT	4	4		
		21	91212-422-006	O-RING, 14.8X2.4	1	1		
		22	93491-08012-07	BOLT-WASHER, 8X12	1	1		
		23	93893-04012-18	SCREW-WASHER, 4X12	2	2		
		24	94001-06000-0S	NUT, HEX., 6MM	1	1		
		25	94002-08000-0S	NUT, HEX., 8MM	1	1		
		26	94201-16150	PIN, SPLIT, 1.6X15	1	1		
		27	95700-06010-10	BOLT, FLANGE, 6X10	1	1		
		28	95700-06014-08	BOLT, FLANGE, 6X14	1	1		

H 1


F-12

Rear brake caliper

Etrier de frein arrière

Hinterradbremssattel

Calibrador de freno trasero

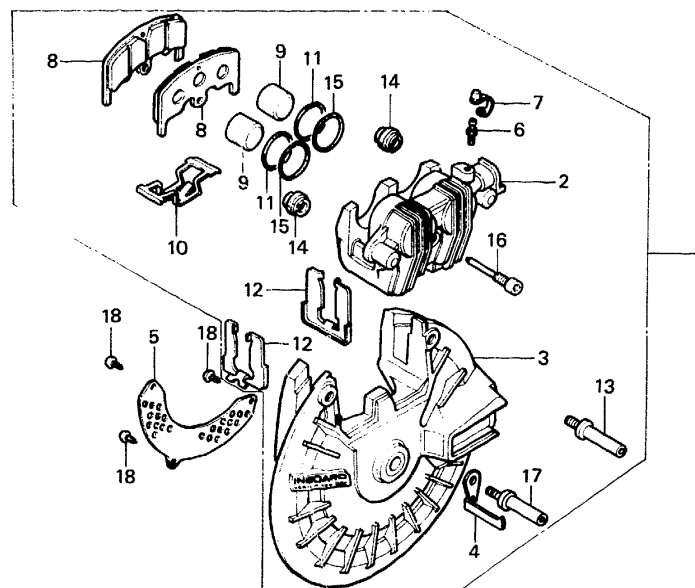

BMA6-32C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
CALIPER ASSY., RR.	0.7	1	43100-MA6-006	CALIPER ASSY., RR.	1 1	2004432	ED,F
CALIPER COMP., RR.	1.0			(NISSHIN JB)			
BRACKET COMP., RR.	0.6		43100-MA6-007	CALIPER ASSY., RR.	1 1	2004432	
PAD COMP.	0.2			(NISSHIN ASK)			
PISTON	0.9		43100-MA6-016	CALIPER ASSY., RR.	1 1	2004433	2007136 ED,F
(ADD 0.1 FOR EACH.)				(NISSHIN JB)			
(INC. RELATIVE PART)			43100-MA6-017	CALIPER ASSY., RR.	1 1	2004433	2007136
				(NISSHIN ASK)			
			43100-MA6-026	CALIPER ASSY., RR.	1 1	2007137	ED,F
				(NISSHIN JB)			
			43100-MA6-027	CALIPER ASSY., RR.	1 1	2007137	
				(NISSHIN ASK)			
		2	43101-MA6-006	CALIPER COMP., RR.	1 1	2007136	
			43101-MA6-016	CALIPER COMP., RR.	1 1	2007137	
		3	43110-MA6-006	BRACKET COMP., RR.	1 1	2004432	
			43110-MA6-016	BRACKET COMP., RR.	1 1	2004433	2007136
			43110-MA6-026	BRACKET COMP., RR.	1 1	2007137	
		4	43145-MA6-006	INDICATOR, RR. BRAKE	1 1	2007137	
		5	43150-MA6-000	NET, CALIPER BRACKET	1 1		
		6	43352-568-003	SCREW, BLEEDER	1 1		

H 2


F-12

Rear brake caliper

Etrier de frein arrière

Hinterradbremssattel

Calibrador de freno trasero

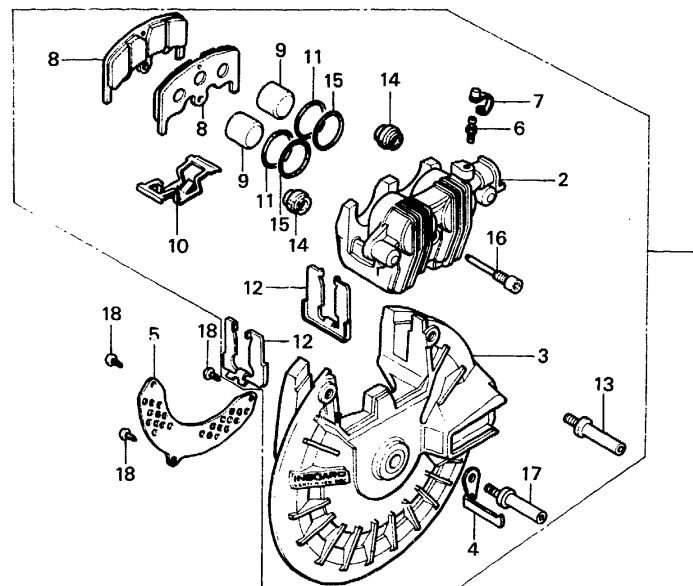

BMA6-32C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No.		Serial No.	Area code
					CBX400	Fc F2c		
		7	43353-461-771	CAP, BLEEDER	1	1		
		8	45105-MA6-004	PAD COMP. (JB)	2	2		ED,F
			45105-MA6-007	PAD COMP. (ASK)	2	2		
		9	45107-MA3-006	PISTON	2	2		
		10	45108-MA6-006	SPRING, PAD	1	1		
		11	45109-166-006	DUST SEAL	2	2		
		12	45112-MA6-006	RETAINER, 11T	2	2		
		13	45131-MA6-006	PIN, BOLT	1	1		
		14	45133-MA6-006	BOOT	2	2		
		15	45209-166-006	SEAL, PISTON	2	2		
		16	45215-MA6-006	PIN, HANGER	1	1		
		17	45231-MA6-006	PIN, BOLT	1	1		
		18	93500-04006-1G	SCREW, PAN, 4X6	3	3		

H 3


F-13

Rear wheel

Roue arrière

Hinterrad

Rueda trasera

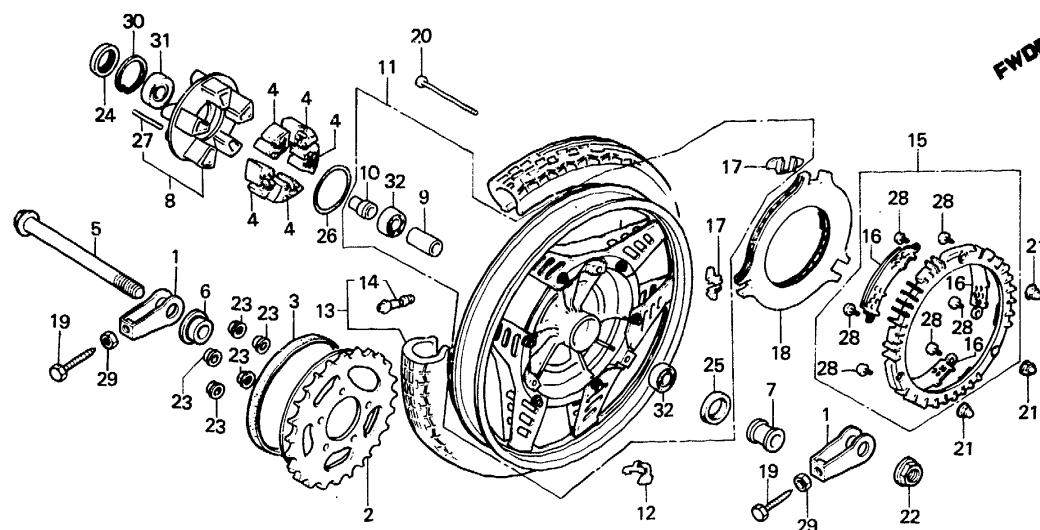

BMA6-33C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
SPROCKET COMP., FINAL DRIVEN	0.6	1	40543-MA6-000	ADJUSTER, DRIVE CHAIN	2 2		
• COLLAR A, RR. AXLE DISTANCE		2	41200-MA6-620	SPROCKET COMP., FINAL DRIVEN	1 1		
• BEARING, RADIAL BALL, 6303U (ADD 0.1 FOR EACH.)				(45T)			
DAMPER, RR. WHEEL (ONE OR ALL)	0.7	3	41212-MA6-000	ARRESTER, NOISE	1 1		
AXLE, RR. WHEEL	0.4	4	41241-MA6-000	DAMPER, RR. WHEEL	5 5		
FLANGE ASSY., DRIVEN	0.8	5	42301-MA6-000	AXLE, RR. WHEEL	1 1		
WHEEL COMP., RR.	1.2	6	42312-MC4-000	COLLAR, RR. WHEEL	1 1		
• TIRE ASSY., RR.		7	42313-MA6-000	COLLAR, RR. BRAKE PANEL SIDE	1 1		
WEIGHT, BALANCE	0.9	8	42610-MA6-620	FLANGE ASSY., DRIVEN	1 1		
COVER COMP., RR. DISK	0.5	9	42620-MC4-000	COLLAR A, RR. AXLE DISTANCE	1 1		
• PLATE, FR. BRAKE DISK		10	42625-MA6-000	COLLAR B, RR. AXLE DISTANCE	1 1		
		11	42650-MA6-621	WHEEL COMP., RR.	1 1		
		12	42704-MC7-000	WEIGHT, BALANCE (10G)	N N		
			42705-MC7-000	WEIGHT, BALANCE (20G)	N N		
			42706-MC7-000	WEIGHT, BALANCE (30G)	N N		

H 4


F-13

Rear wheel

Roue arrière

Hinterrad

Rueda trasera

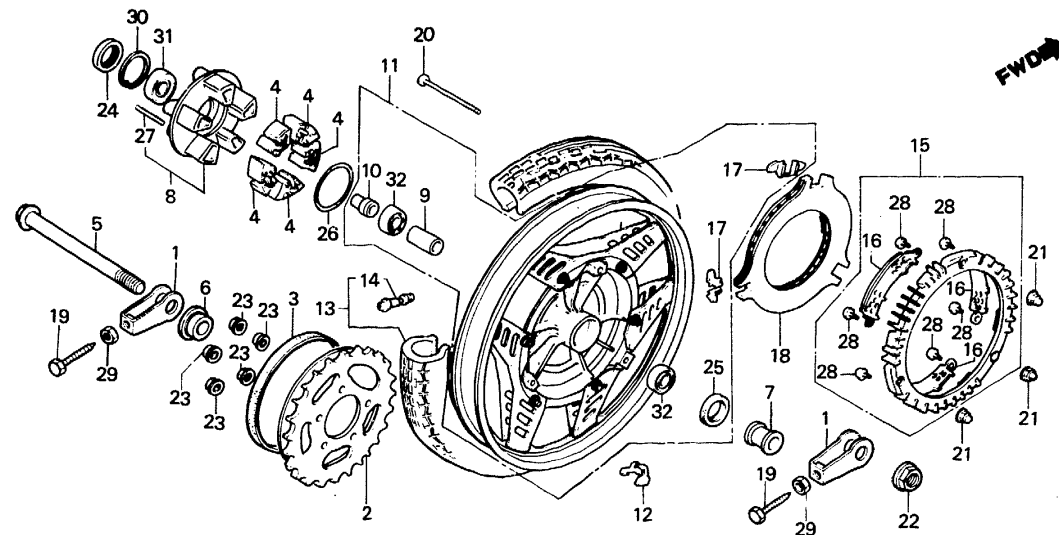

BMA6-33C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		13	42710-MA6-621	TIRE ASSY., RR. (4.10H18-4PR BS)	1 1	2003907	
			42710-MA6-622	TIRE ASSY., RR. (4.10H18-4PR DUNLOP)	1 1		
		14	42753-425-003	VALVE, RIM (BS)	1 1	2003907	
			42753-425-004	VALVE, RIM (DUNLOP)	1 1		
		15	43140-MA6-000	COVER COMP., RR. DISK	1 1	2007136	
			43140-MA6-750	COVER COMP., RR. DISK	1 1	2007137	
		16	43142-MA6-000	NET, RR. BRAKE DISK COVER	3 3		
		17	44602-MA6-000	SPRING, DISK PLATE	3 3		
		18	45251-MA6-000	PLATE, FR. BRAKE DISK	1 1		
		19	90119-300-000	BOLT, CHAIN ADJUSTING	2 2		
		20	90129-MA6-000	BOLT, HEX., 6X85	3 3	2007136	
			90129-KE7-000	BOLT, SOCKET, 6X78.5	3 3	2007137	
		21	90301-MA6-003	NUT, FLANGE CAP, 6MM	3 3	2007136	
			90302-KE8-003	NUT, CAP, 6MM	3 3	2007137	
		22	90305-MC0-003	NUT, RR. AXLE U, 16MM	1 1		
		23	90308-357-000	NUT, HEX., 10MM	5 5		

H 5


F-13

Rear wheel

Roue arrière

Hinterrad

Rueda trasera

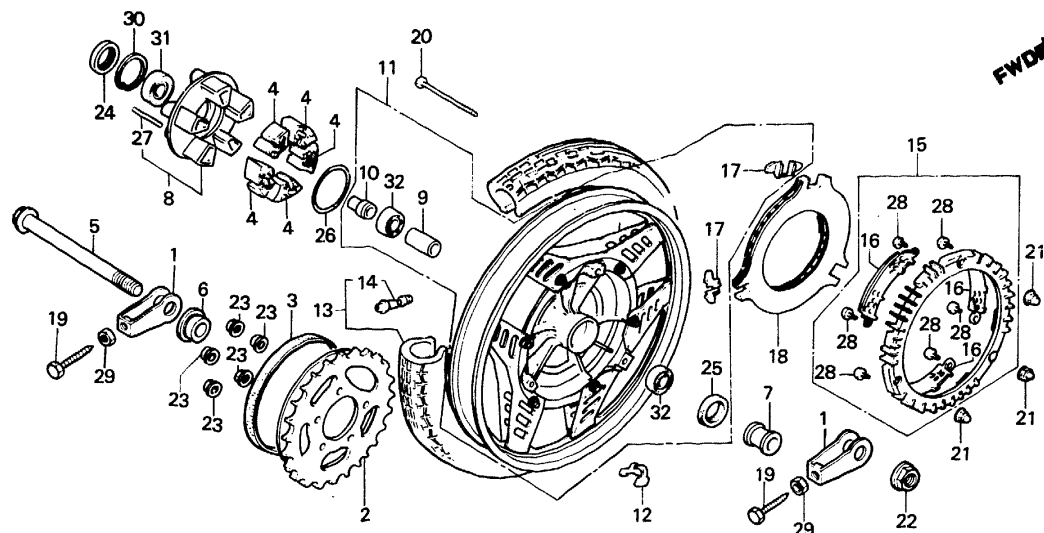

BMA6-33C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		24	91252-MC4-003	OIL SEAL, 28X47.2X7 (ARAI)	1 1		
			91252-MC4-005	OIL SEAL, 28X47.2X7 (NIPPON)	1 1		
		25	91253-443-761	DUST SEAL, 30X47X8	1 1		
			91253-443-762	DUST SEAL, 30X47X8	1 1		
		26	91302-MA6-003	O-RING, 61X2	1 1		
		27	92716-10045-0E	BOLT, STUD, 10X45	5 5		
		28	93500-04006-1G	SCREW, PAN, 4X6	6 6		
		29	94001-08000-0S	NUT, HEX., 8MM	2 2		
		30	94520-47000	CIRCLIP, INTERNAL, 47MM	1 1		
		31	96120-62040-10	BEARING, RADIAL BALL, 6204	1 1		
		32	96140-63030-10	BEARING, RADIAL BALL, 6303U	2 2		

H 6


F-14

Fuel tank

Réservoir d'essence

Benzintank

Tanque de combustible

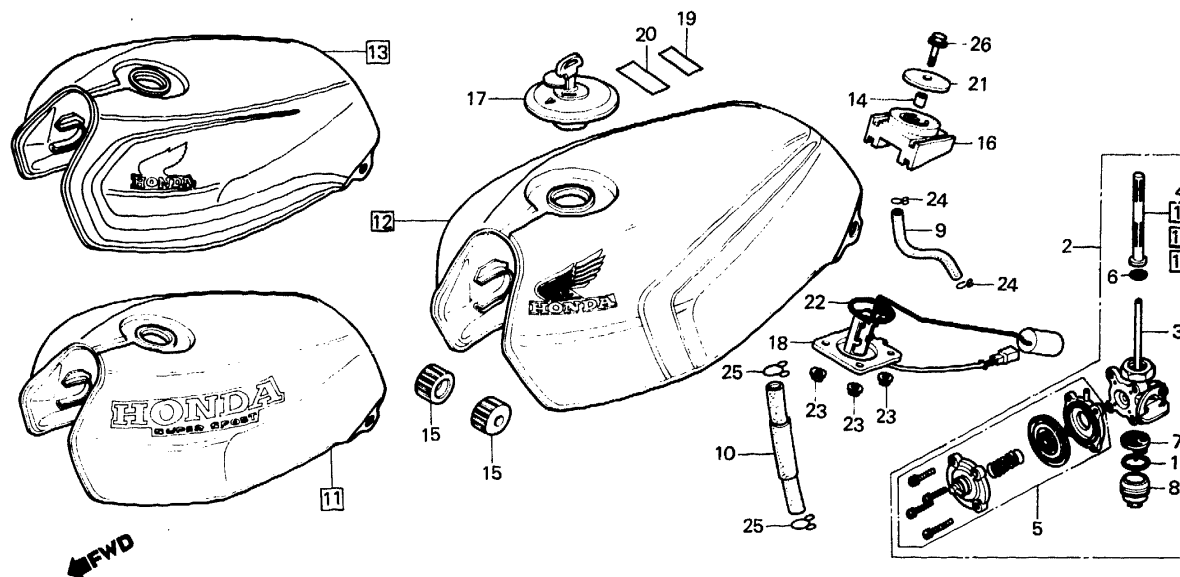

BMA6-34C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
COCK ASSY., FUEL	0.2	1	16173-001-004	PACKING, FUEL STRAINER CUP	1 1		
• BODY COMP., COCK		2	16950-MA6-015	COCK ASSY., FUEL	1 1		
• SCREEN SET, FUEL STRAINER		3	16951-MA6-015	BODY COMP., COCK	1 1		
COVER SET, COCK	0.1	4	16952-MA6-005	SCREEN SET, FUEL STRAINER	1 1		
• CUP, FILTER		5	16953-449-751	COVER SET, COCK	1 1		
(INC. RELATIVE PART)							
TANK SET, FUEL	0.4	6	16958-MA1-731	O-RING	1 1		
METER UNIT, FUEL	0.3	7	16959-461-751	CUP, FILTER	1 1		
		8	16967-GA6-671	CUP, FUEL STRAINER	1 1		
		9	16972-MA6-000	TUBE, VACUUM	1 1		
		10	16990-MA6-000	TUBE, FUEL	1 1		
		11	175A1-MA6-000ZA	TANK SET, FUEL *R-110* (MONZA RED)	1		
		12	175A1-MA6-620ZA	TANK SET, FUEL *TYPE 1* (PEARL WHITE/RED)	1 1		




F-14

Fuel tank

Réservoir d'essence

Benzintank

Tanque de combustible

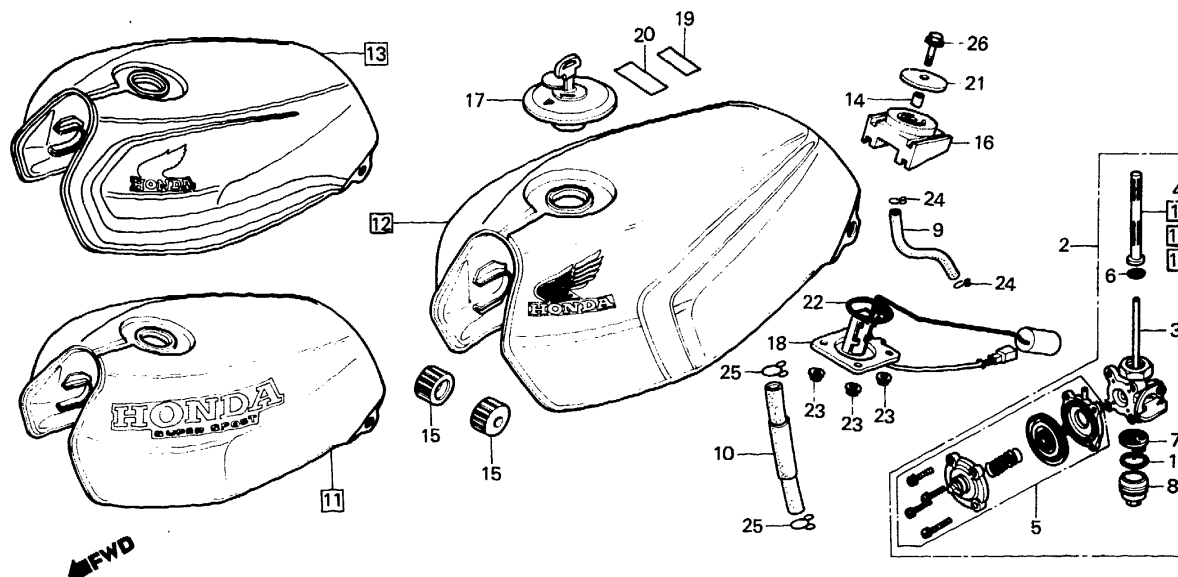

BMA6-34C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
			175A1-MA6-620ZB	TANK SET, FUEL *TYPE 2* (PEARL WHITE/BLUE)	1 1		
		13	175A1-MA6-630ZA	TANK SET, FUEL *NH-121P-A* (PEARL SHELL WHITE)	1 1		ED
			175A1-MA6-630ZB	TANK SET, FUEL *R-110, TYPE-2* (MONZA RED)	1 1		ED
		14	17514-155-010	COLLAR, FUEL TANK RR. MOUNTING	1 1		
		15	17611-286-000	CUSHION, FUEL TANK FR.	2 2		
		16	17613-MA6-000	CUSHION, FUEL TANK RR.	1 1		
		17	17620-460-037	CAP COMP., FUEL FILLER	1 1		
		18	37800-MA6-008	METER UNIT, FUEL	1 1		
		19	87517-MA6-620ZA	LABEL, FR. FORK CAUTION *NH-0* (FRENCH)	1 1	2007136	F


F-14

Fuel tank

Réservoir d'essence

Benzintank

Tanque de combustible

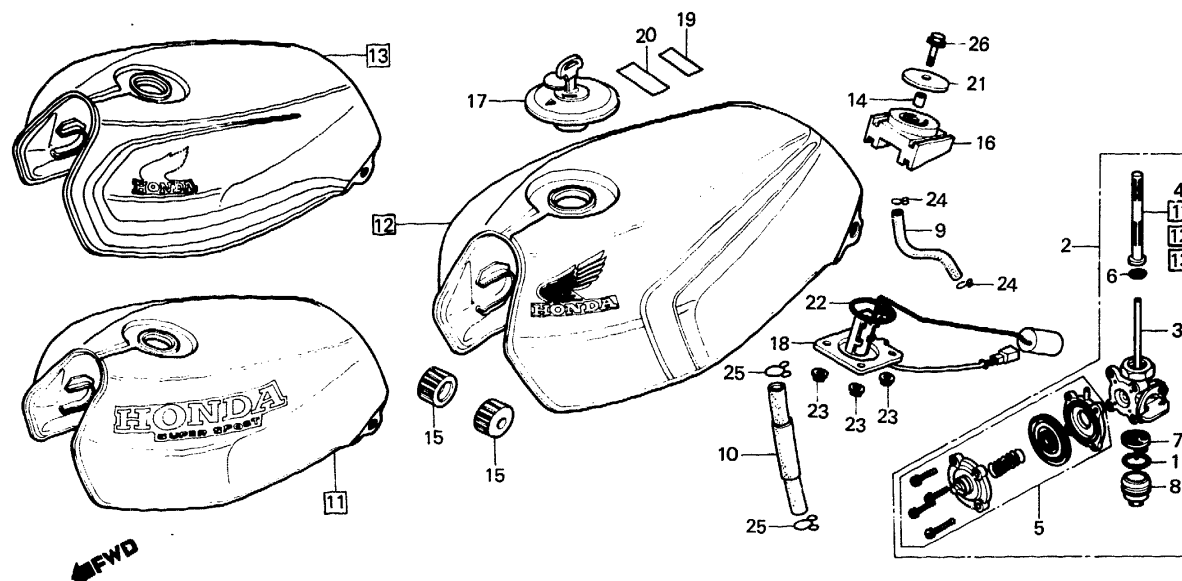

BMA6-34C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
			87517-MA6-630ZA	LABEL, FR. FORK CAUTION *NH-0*	1 1	2007136	ED,U
			87517-MA6-630ZB	LABEL, FR. FORK CAUTION *NH-1*	1 1	2007136	ED,U
			87517-MA6-760ZA	LABEL, AIR PRESSURE CAUTION	1 1	2007137	
			87517-MA6-760ZB	LABEL, AIR PRESSURE CAUTION	1 1	2007137	ED,U
				NH-0			
				NH-1			
		20	87560-181-760ZB	MARK, DRIVE CAUTION *NH-0*	1 1		ED,U
			87560-463-830ZB	MARK, DRIVE CAUTION *NH-0*	1 1		F
				(FRENCH)			
		21	90502-461-000	WASHER, 8.3X38	1 1		
		22	91305-MC7-000	O-RING, 39.5X5	1 1		
		23	94050-06000	NUT, FLANGE, 6MM	4 4		
		24	95002-02070	CLIP B7, TUBE	2 2		
		25	95002-02120	CLIP B12, TUBE	2 2		
		26	95700-08032-00	BOLT, FLANGE, 8X32	1 1		


F-15

Seat

Siege

Sitz

Asiento

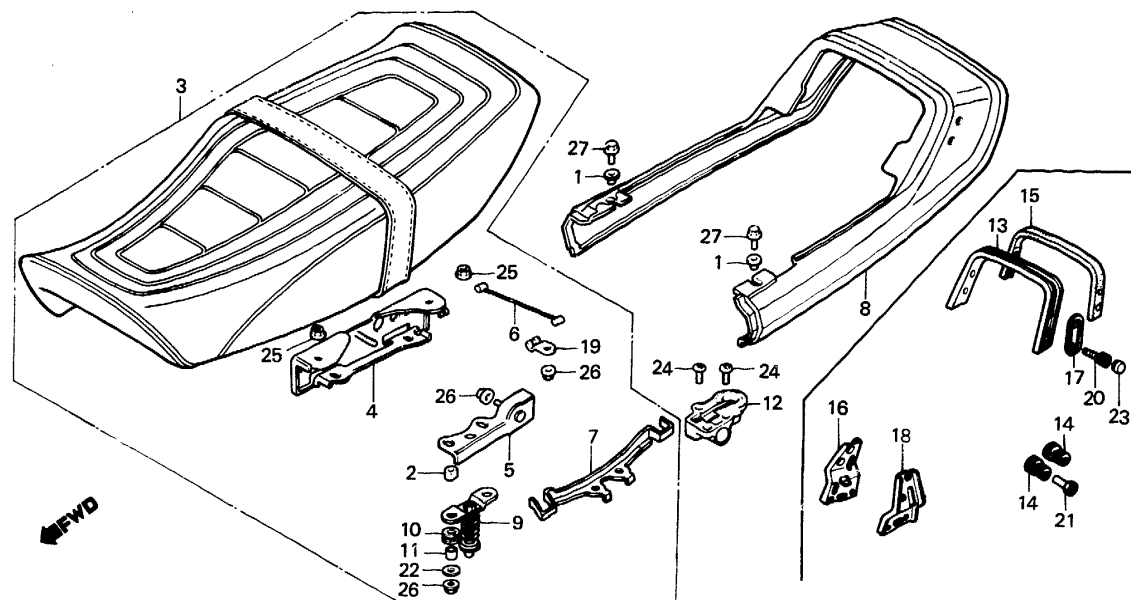

BMA6-35G

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
SEAT COMP., DOUBLE (INC. RELATIVE PART) • COWL COMP., SEAT • LOCK ASSY., SEAT	0.1	1	61101-441-000	COLLAR, FR. FENDER SETTING	2 2	2007137	2007136
		2	77121-438-000	COLLAR, SEAT RR. STAY	2 2		
		3	77200-MA6-600	SEAT COMP., DOUBLE	1 1		
		4	77200-MA6-760	SEAT COMP., DOUBLE	1 1		
		5	77202-MA6-000	HINGE COMP., SEAT	1 1		
			77207-MA6-000	STAY, SEAT LOCK	1 1	2007137	2007136
		6	77208-MA6-000	STOPPER, SEAT	1 1		
			77208-MA6-750	STOPPER, SEAT	1 1		
		7	77209-MA6-750	COVER, HELMET HOOK	1 1		
		8	77220-MA6-600ZA	COWL COMP., SEAT *R-110* (MONZA RED)	1		
			77220-MA6-620ZA	COWL COMP., SEAT *TYPE-1* (PEARL WHITE/RED)	1 1		
			77220-MA6-620ZB	COWL COMP., SEAT *TYPE-2* (PEARL WHITE/BLUE)	1 1		

H 10


F-15

Seat

Siege

Sitz

Asiento

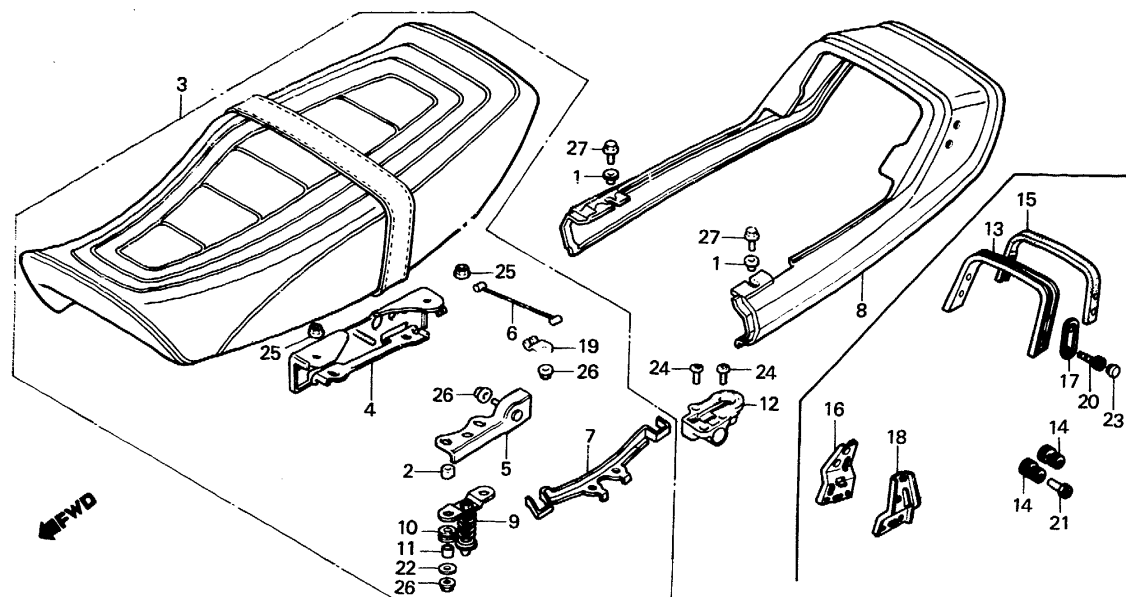

BMA6-35G

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
			77220-MA6-630ZA	COWL COMP., SEAT *NH-121P-A* (PEARL SHELL WHITE)	1 1		ED
			77220-MA6-630ZB	COWL COMP., SEAT *R-110, TYPE-2*	1 1		ED
		9	77220-340-011	BAR ASSY., SEAT LOCK (MONZA RED/STRIPE)	1 1		
		10	77228-340-001	RUBBER, SEAT LOCK BAR CUSHION	2 2		
		11	77229-340-001	COLLAR, SEAT LOCK BAR	2 2		
		12	77230-MA6-007	LOCK ASSY., SEAT	1 1		
		13	77310-MA2-770	RAIL, RR. GRAB	1 1		
			77310-MA6-640	RAIL, RR. GRAB	1 1		
		14	77313-MA6-601	GROMMET, RR. COWL	4 4	2007137	2007136
		15	77320-MA2-770	PAD, GRAB RAIL	1 1		
		16	77330-MA6-600	BRACKET, R. RR. GRAB RAIL	1 1		

H 11


F-15

Seat

Siege

Sitz

Asiento

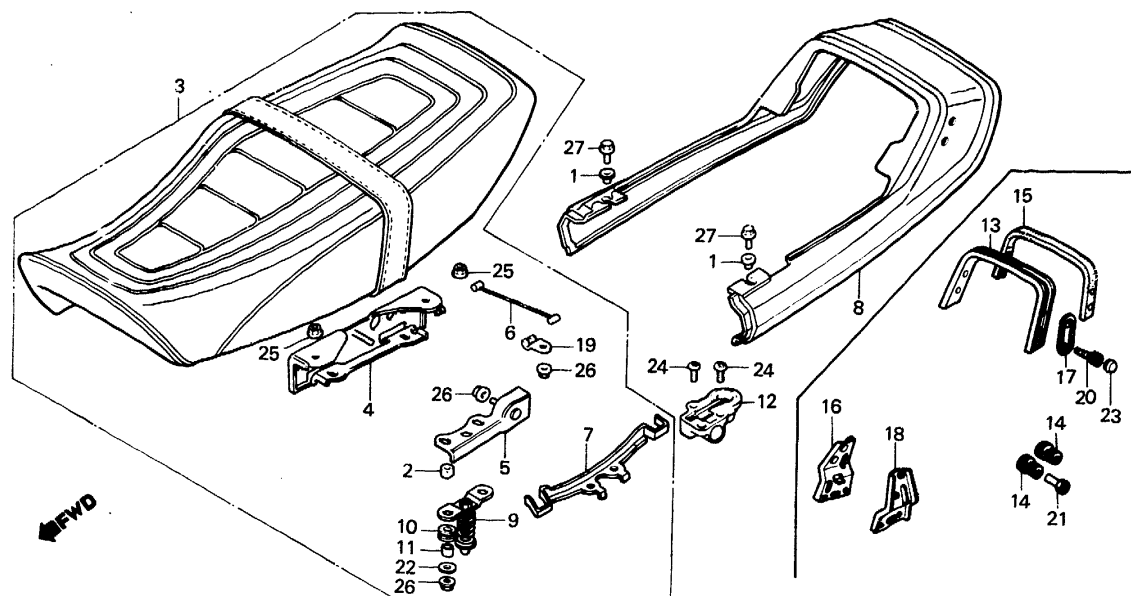

BMA6--35G

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		17	77331-MA2-770	WASHER	2 2		
		18	77340-MA6-600	BRACKET, L. RR. GRAB RAIL	1 1		
		19	81222-GA7-810	STAY, LID STOPPER	1 1		
		20	90001-MA2-770	BOLT, SOCKET, 6X16	4 4		
		21	90300-MA6-600	NUT, GRAB RAIL SETTING	4 4		
		22	90514-700-000	WASHER, TANK COLLAR LOCKING	2 2		
		23	91456-MA2-770	CAP, SOCKET BOLT	4 4		
		24	93500-06012-1G	SCREW, PAN, 6X12	2 2		
			93500-06012-1A	SCREW, PAN, 6X12	2 2		
		25	94050-06000	NUT, FLANGE, 6MM	2 2	2007137	2007136
		26	94050-06080	NUT, FLANGE, 6MM	5 5		
		27	95700-06012-00	BOLT, FLANGE, 6X12	2 2		

H 12


F-16

Side cover • Battery

Couvercle latéral • Batterie

Seitendeckel • Batterie

Cubierta lateral • Batería

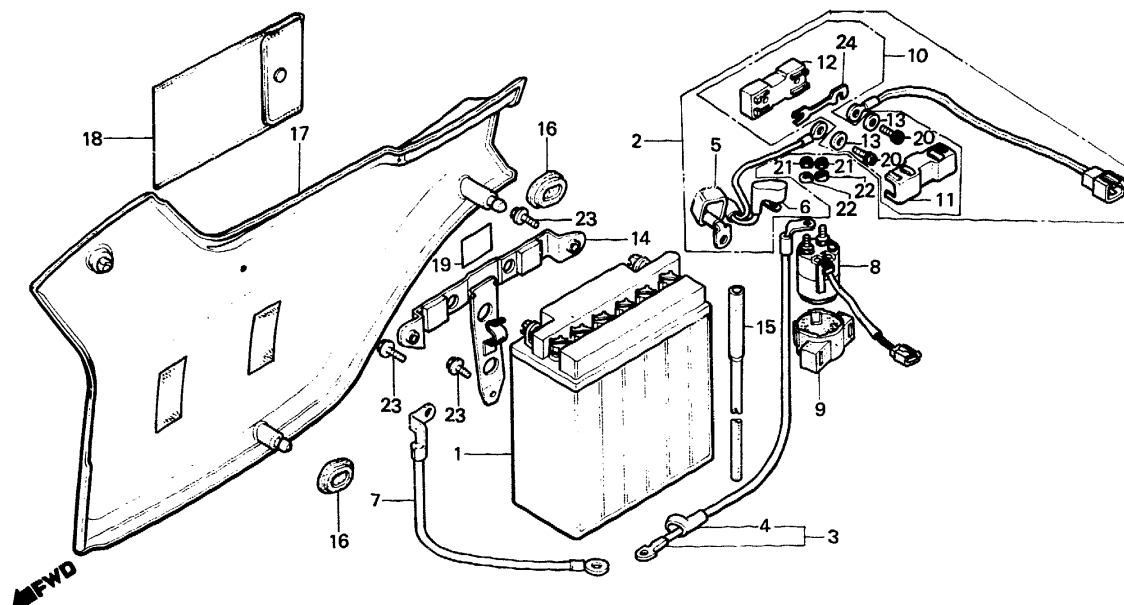

BMA6-36B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
BATTERY, 12V12	0.1	1	31500-413-721	BATTERY, 12V12	1 1		
CABLE, STARTER BATTERY	0.2	2	32401-MA6-000	CABLE, STARTER BATTERY	1 1		
• CABLE, STARTER MOTOR		3	32410-MA6-000	CABLE, STARTER MOTOR	1 1		
• CABLE, BATTERY EARTH		4	32411-253-000	COVER, STARTING MOTOR TERMINAL	1 1		
• SWITCH ASSY., STARTER MAGNETIC		5	32412-426-000	COVER, MAGNETIC SWITCH	1 1		
				TERMINAL			
		6	32412-471-000	COVER, BATTERY TERMINAL	1 1		
		7	32601-MA6-000	CABLE, BATTERY EARTH	1 1		
		8	35850-G85-671	SWITCH ASSY., STARTER MAGNETIC	1 1		
			35850-MA6-750	SWITCH ASSY., STARTER MAGNETIC	1 1	2007137	2007136
		9	35856-425-000	RUBBER, MAGNETIC SHOCK	1 1		
		10	38250-MA6-005	BOX, MAIN FUSE	1 1		
		11	38251-MA6-005	COVER	1 1		
		12	38252-MA6-005	BASE COMP.	1 1		
		13	38253-422-005	WASHER, PLAIN, 3X10	2 2		

H 13


F-16

Side cover • Battery

Couvercle latéral • Batterie

Seitendeckel • Batterie

Cubierta lateral • Batería

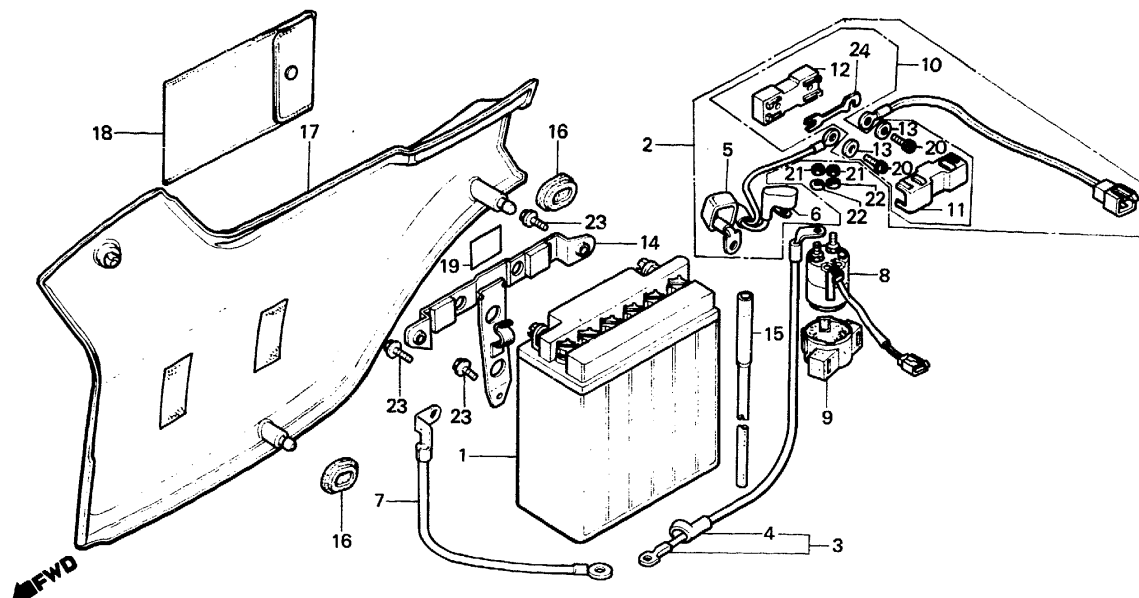

BMA6-36B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		14	50327-MA6-000	PLATE, BATTERY SUPPORT	1 1		
		15	50328-MA6-000	TUBE, BATTERY	1 1		
		16	83551-300-000	GROMMET, AIR CLEANER CASE	3 3		
		17	83610-MA6-000ZA	COVER COMP., R. SIDE *R-110* (MONZA RED)	1		
			83610-MA6-620ZA	COVER COMP., R. SIDE *TYPE-1* (PEARL WHITE/RED)	1		
			83610-MA6-620ZB	COVER COMP., R. SIDE *TYPE-2* (PEARL WHITE/BLUE)	1		
			83610-MA6-630ZA	COVER COMP., R. SIDE (PEARL SHELL WHITE) *NH-121P-A*	1		ED
			83610-MA6-630ZB	COVER COMP., R. SIDE (MONZA RED/STRIPE) *R-110, TYPE-2*	1		ED

H 14


F-16

Side cover • Battery

Couvercle latéral • Batterie

Seitendeckel • Batterie

Cubierta lateral • Batería

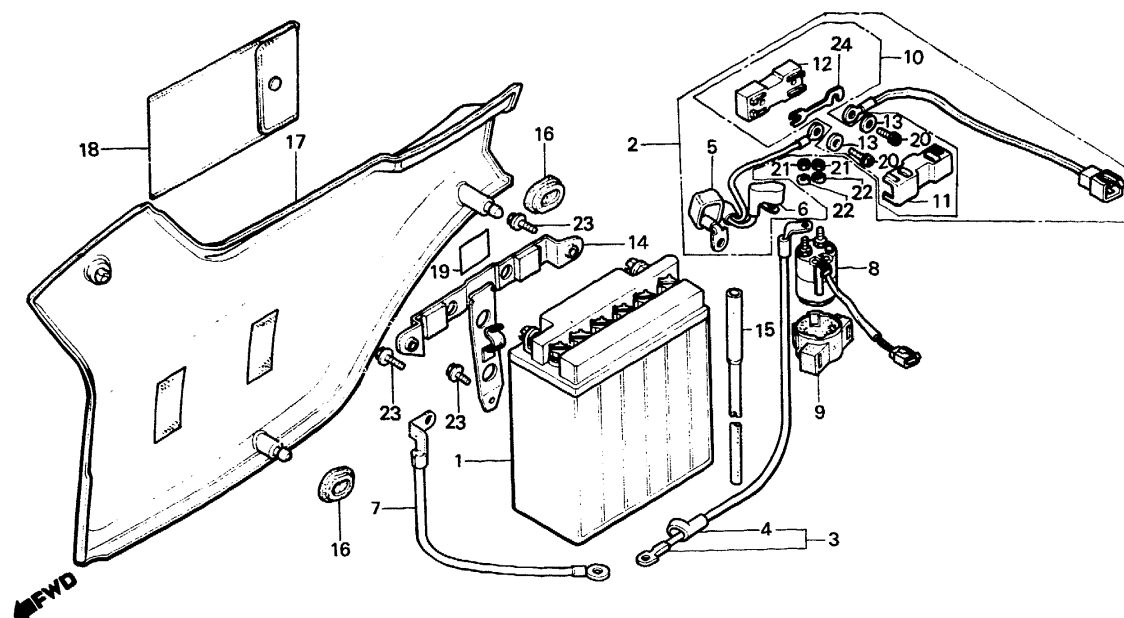

BMA6-36B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
			83610-MA6-720ZA	COVER COMP., R. SIDE *TYPE-1* (PEARL WHITE/RED)	1		
			83610-MA6-720ZB	COVER COMP., R. SIDE *TYPE-2* (PEARL WHITE/BLUE)	1		
			83610-MA6-730ZA	COVER COMP., R. SIDE *NH-121P-A*	1		ED
			83610-MA6-730ZB	COVER COMP., R. SIDE *R-110* (MONZA RED/STRIPE)	1		ED
		18	83642-355-000	BAG, OWNERS MANUAL	1 1		
		19	87506-MA6-600	MARK, BATTERY CAUTION	1 1		ED,U
		20	87506-MA6-720	MARK, BATTERY CAUTION	1 1		F
			93500-03008-0H	SCREW, PAN, 3X8	2 2		
		21	94002-06000-0S	NUT, HEX., 6MM	2 2		
		22	94111-06000	WASHER, SPRING, 6MM	2 2		

H 15


F-16

Side cover • Battery

Couvercle latéral • Batterie

Seitendeckel • Batterie

Cubierta lateral • Batería

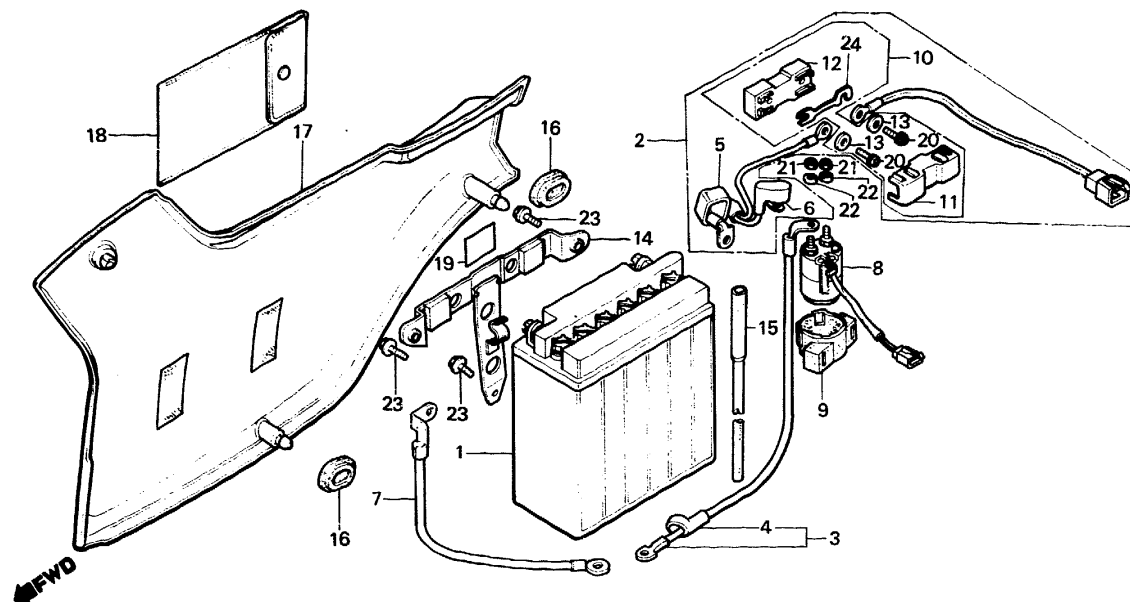

BMA6-36B

Service item	F.R.T.	Ref. No.	Part No.	Description	Regd. No. CBX400 Fc F2c	Serial No.	Area code
		23	95700-06012-00	BOLT, FLANGE, 6X12	3 3		
		24	98200-53000	FUSE F (30A)	2 2		

H 16



F-17

Side cover

Couvercle latéral

Seitendeckel

Cubierta lateral

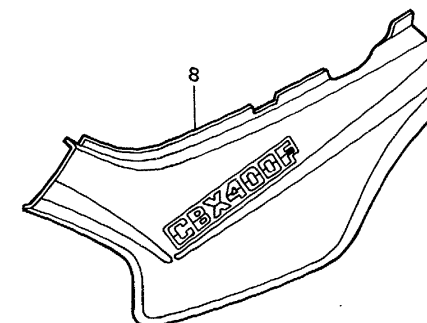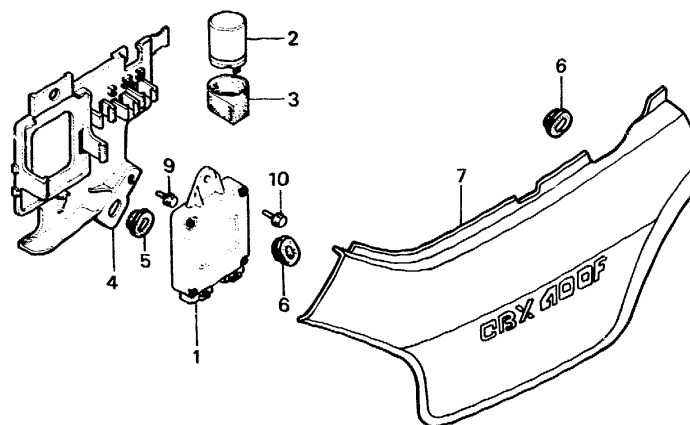

BMA6-37B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
SPARK UNIT	0.3	1	30400-MA6-620	SPARK UNIT	1 1		
RELAY COMP., WINKER	0.1	2	38301-415-004	RELAY COMP., WINKER (MITSUBA)	1 1		
PLATE, ELECTRIC BASE	0.2	3	38306-292-000	SUSPENSION, WINKER RELAY	1 1		
		4	50330-MA6-000	PLATE, ELECTRIC BASE	1 1	2007136	
		5	50330-MA6-750	PLATE, ELECTRIC BASE	1 1	2007137	
		6	83551-MA6-000	GROMMET, SIDE COVER	1 1		
		7	83551-300-000	GROMMET, AIR CLEANER CASE	2 2		
			83710-MA6-000ZA	COVER COMP., L. SIDE *R-110* (MONZA RED)	1		
			83710-MA6-620ZA	COVER COMP., L. SIDE *TYPE-1* (PEARL WHITE/RED)	1		
			83710-MA6-620ZB	COVER COMP., L. SIDE *TYPE-2* (PEARL WHITE/BLUE)	1		

I 1


F-17

Side cover

Couvercle latéral

Seitendeckel

Cubierta lateral

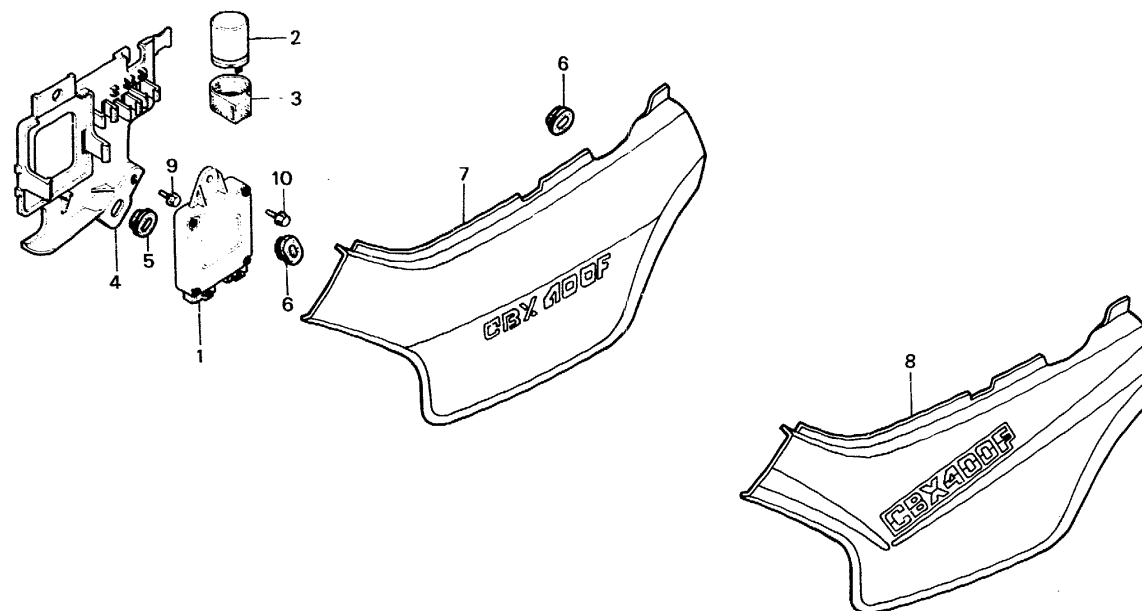

BMA6-37B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
			83710-MA6-720ZA	COVER COMP., L. SIDE *TYPE-1* (PEARL WHITE/RED)	1		
			83710-MA6-720ZB	COVER COMP., L. SIDE *TYPE-2* (PEARL WHITE/BLUE)	1		
		8	83710-MA6-630ZA	COVER COMP., L. SIDE *NH-121P-A* (PEARL SHELL WHITE)	1		ED
			83710-MA6-630ZB	COVER COMP., L. SIDE *R-110, TYPE-2* (MONZA RED/STRIPE)	1		ED
			83710-MA6-730ZA	COVER COMP., L. SIDE *NH-121P-A* (PEARL SHELL WHITE)	1		ED
			83710-MA6-730ZB	COVER COMP., L. SIDE *R-110* (MONZA RED/STRIPE)	1		ED
		9	90111-162-000	BOLT, FLANGE, 6MM	1 1	2007137	2007136
			95700-06014-00	BOLT, FLANGE, 6X14	1 1		
		10	95700-06012-00	BOLT, FLANGE, 5X12	1 1		

I 2


F-18

Air cleaner

Filtre à air

Luftfilter

Limpiador de aire

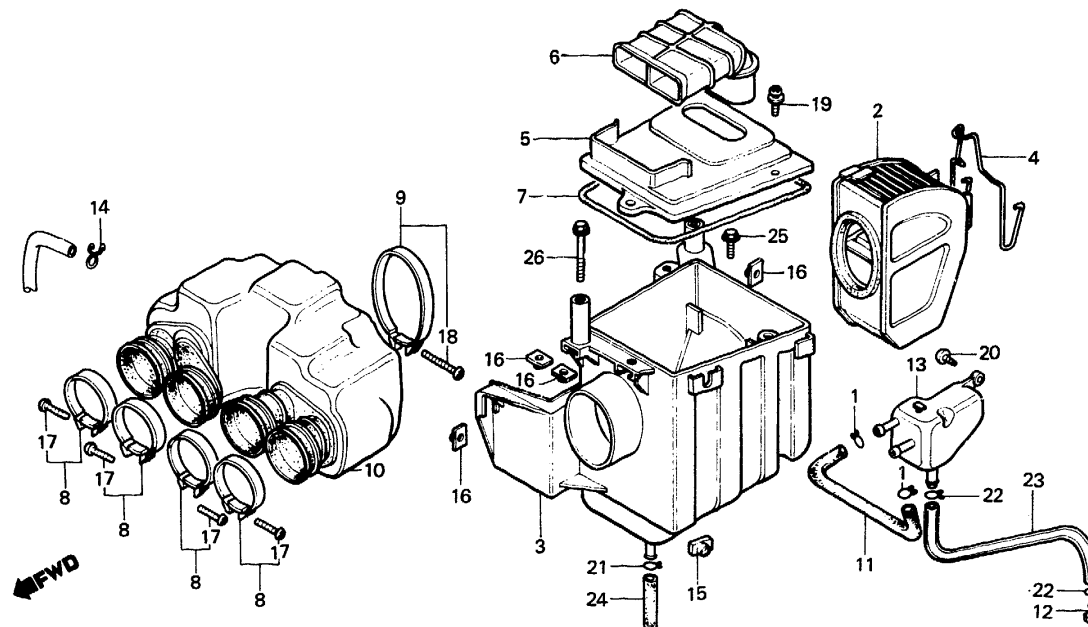

BMA6-38

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
ELEMENT, AIR CLEANER	0.1	1	15772-292-010	CLIP, BREATHER TUBE	2 2	2007136	
CASE, AIR CLEANER	0.8	2	17211-MA6-000	ELEMENT, AIR CLEANER	1 1		
COVER, AIR CLEANER CASE	0.2		17211-MA6-750	ELEMENT, AIR CLEANER	1 1		
DUCT B, AIR CLEANER IN.		3	17215-MA6-000	CASE, AIR CLEANER	1 1		
CHAMBER COMP., AIR CLEANER	1.1	4	17216-MA6-000	SPRING, AIR CLEANER ELEMENT	1 1	2007136	
TANK, STORAGE	0.3						
		5	17217-MA6-000	COVER, AIR CLEANER CASE	1 1		
		6	17218-MA6-000	DUCT B, AIR CLEANER IN.	1 1		
		7	17219-MA6-000	SEAL, AIR CLEANER COVER	1 1	2007137	
		8	17255-MA6-000	BAND, AIR CLEANER CONNECTING	4 4		
		9	17256-MA6-000	BAND, AIR CLEANER CASE SEAL	1 1		
		10	17300-MA6-000	CHAMBER COMP., AIR CLEANER	1 1		
			17300-MA6-750	CHAMBER COMP., AIR CLEANER	1 1		

I 3


F-18

Air cleaner

Filtre à air

Luftfilter

Limpiador de aire

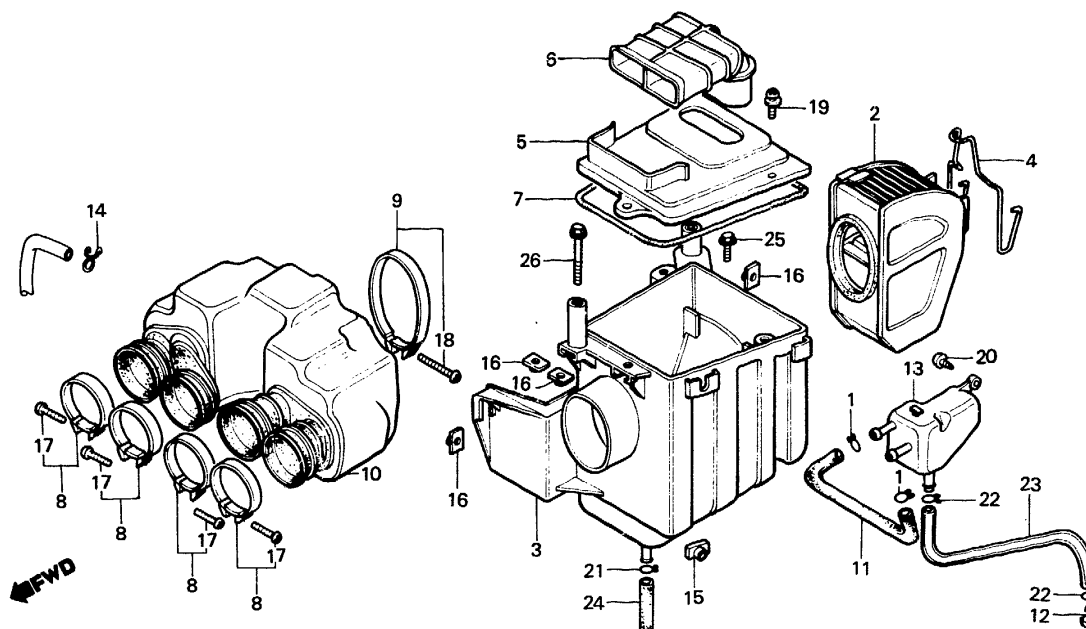

BMA6-38

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		11	17366-MA6-000	TUBE, CHAMBER JOINT	1 1		
		12	17370-419-700	PLUG, BREATHER TUBE	1 1		
		13	17551-MA6-000	TANK, STORAGE	1 1		
		14	18534-634-670	CLIP, AIR HOSE, 16	1 1		
		15	61304-162-013	NUT, HEADLIGHT SETTING	1 1		
		16	90301-471-000	NUT, AIR CLEANER CASE	4 4		
		17	93500-05016-0G	SCREW, PAN, 5X16	4 4		
		18	93500-05020-0G	SCREW, PAN, 5X20	1 1		
		19	93891-06016-00	SCREW-WASHER, 6X16	3 3		
		20	93903-25320	SCREW, TAPPING, 5X16	1 1		
		21	95002-02120	CLIP B12, TUBE	1 1		
		22	95002-02130	CLIP B12.5, TUBE	2 2		
		23	95003-23275-31	TUBE, 8X2750	1 1		
		24	95005-80120-20	TUBE, 8X120	1 1		
		25	95700-06012-00	BOLT, FLANGE, 6X12	2 2		
		26	95700-06050-00	BOLT, FLANGE, 6X50	1 1		

I 4


F-19

Exhaust muffler

Pot d'échappement

Auspufftopf

Silenciador

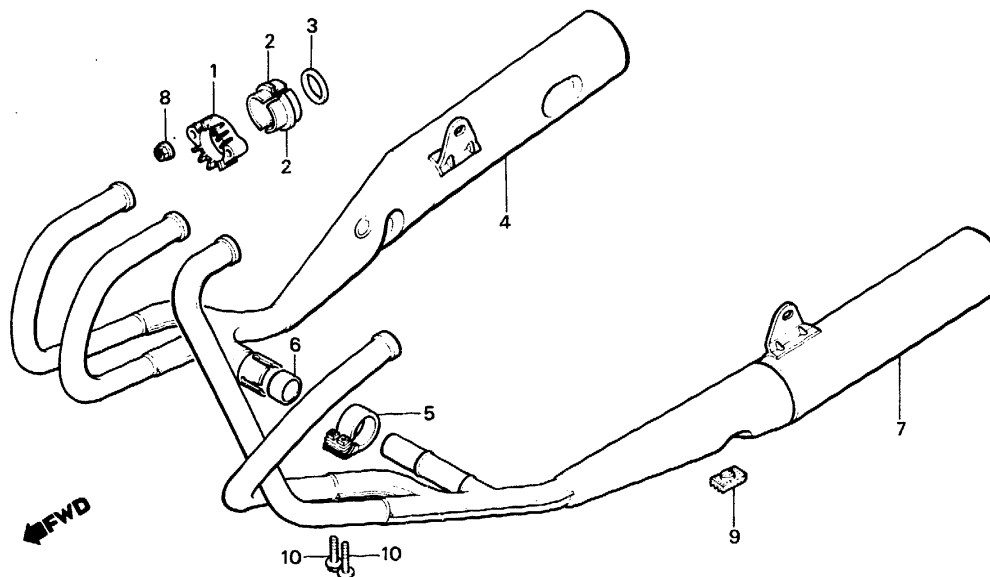

BMA6-39

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
MUFFLER COMP., EX. (ADD 0.2 FOR EACH.)	0.3	1	18231-MA6-000	JOINT, EX. PIPE	4 4		
		2	18233-460-000	COLLAR, EX. PIPE JOINT	8 8		
		3	18291-236-000	GASKET, EX. PIPE	4 4		
		4	18350-MA6-601	MUFFLER COMP., R. EX.	1 1		
		5	18373-438-000	BAND, R. MUFFLER	1 1		
		6	18391-438-000	PACKING, MUFFLER	1 1		
		7	18450-MA6-601	MUFFLER COMP., L. EX.	1 1		
		8	94050-06000	NUT, FLANGE, 6MM	8 8		
		9	95011-64000	RUBBER D, STAND STOPPER	1 1		
		10	95800-08032-00	BOLT, FLANGE, 8X32	2 2		

I 5


F-20

Brake pedal • Change pedal

Pédale de frein • Pédale de changement

Bremspedal • Schaltpedal

Pedal de freno • Pedal de cambio

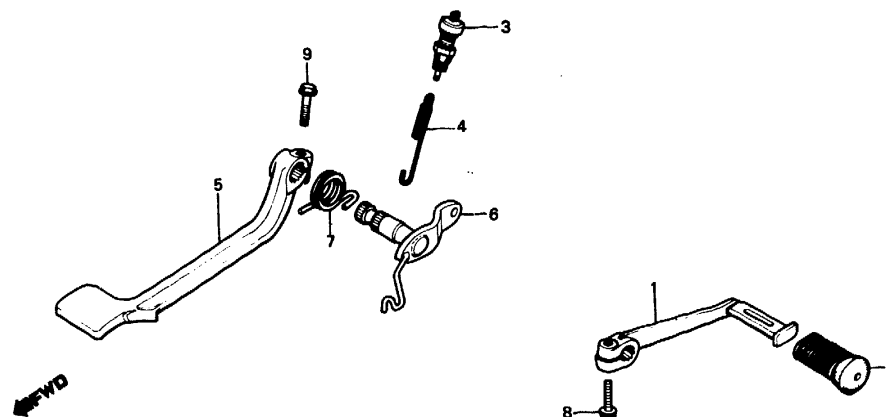

BMA6-40A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
PEDAL, GEAR CHANGE	0.1	1	24700-MA6-000	PEDAL, GEAR CHANGE	1 1		
PEDAL, RR. BRAKE		2	24781-419-000	RUBBER, GEAR CHANGE PEDAL	1 1		
SWITCH ASSY., RR. STOP	0.2	3	35350-166-000	SWITCH ASSY., RR. STOP	1 1		
SPINDLE COMP., RR. BRAKE	0.3	4	35357-426-610	SPRING, STOP SWITCH	1 1		
		5	46500-MA6-000	PEDAL, RR. BRAKE	1 1		
		6	46510-MA6-000	SPINDLE COMP., RR. BRAKE	1 1		
		7	46514-MA6-000	SPRING, BRAKE PEDAL	1 1		
		8	95700-06020-00	BOLT, FLANGE, 6X20	1 1		
		9	95700-08028-00	BOLT, FLANGE, 8X28	1 1		

I 6


F-21

Step

Repose pieds

Tritt

Estribo

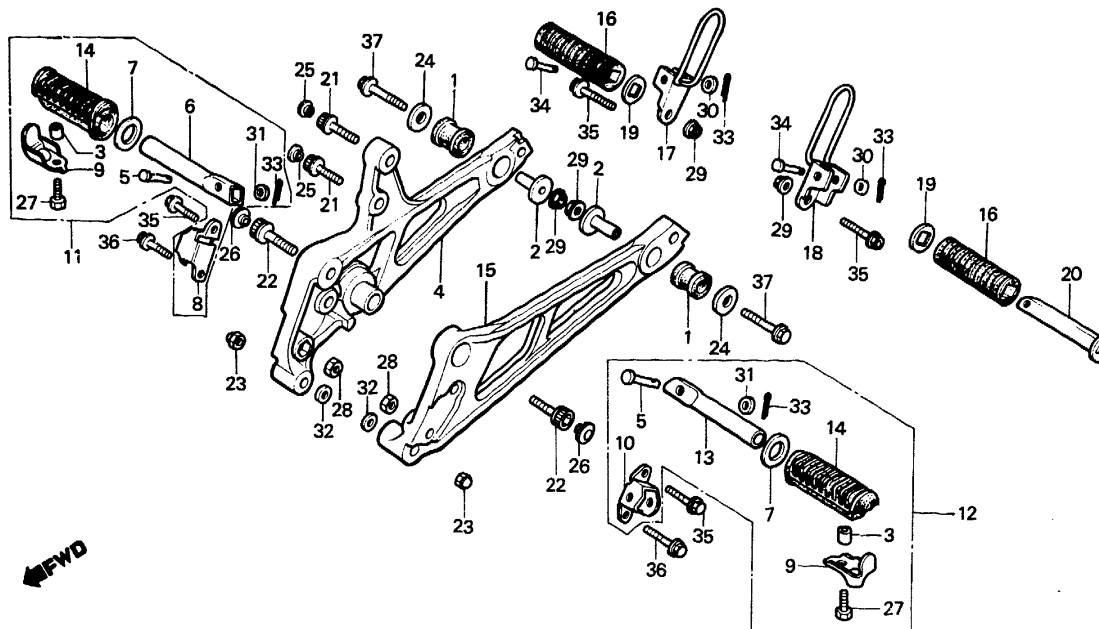

BMA6-41B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
HOLDER COMP., R. STEP	0.3	1	18421-MA6-000	RUBBER, MUFFLER MOUNTING	2 2		
BAR, R. STEP	0.1	2	18422-MA6-000	COLLAR, MUFFLER MOUNTING	2 2		
(INC. RELATIVE PART)		3	37243-323-000	COLLAR, METER SETTING	2 2		
• STEP ASSY., R. MAIN		4	50600-MA6-000	HOLDER COMP., R. STEP	1 1		
• STEP ASSY., L. MAIN		5	50603-033-000	PIN, STEP BAR JOINT	2 2		
• BAR, L. STEP		6	50612-MA6-000	BAR, R. STEP	1 1		
(INC. RELATIVE PART)		7	50614-413-000	WASHER, MAIN STEP	2 2		
• BAR, PILLION STEP		8	50618-MA6-000	BRACKET, R. STEP	1 1		
(INC. RELATIVE PART)		9	50619-MA6-000	STOPPER, STEP RUBBER	2 2		
HOLDER, L. STEP	0.2	10	50628-MA6-000	BRACKET, L. STEP	1 1		
		11	50630-MA6-000	STEP ASSY., R. MAIN	1 1		
		12	50640-MA6-000	STEP ASSY., L. MAIN	1 1		
		13	50643-MA6-000	BAR, L. STEP	1 1		
		14	50661-425-670	RUBBER, STEP	2 2		

I 7


F-21

Step

Repose pieds

Tritt

Estribo

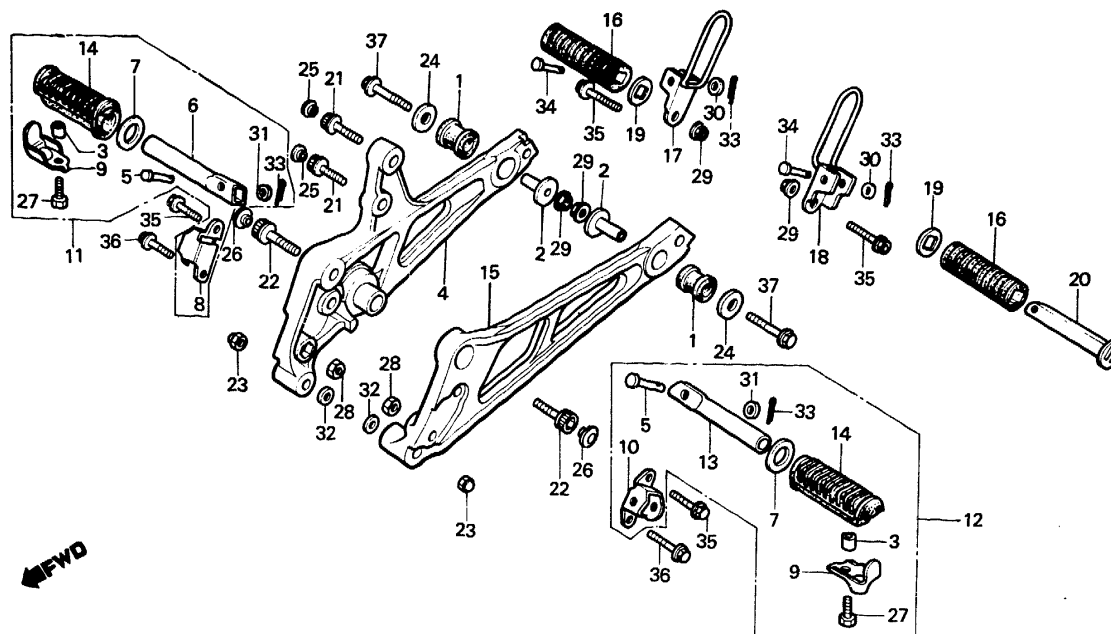

BMA6-41B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		15	50700-MA6-000	HOLDER, L. STEP	1 1		
		16	50710-377-000	RUBBER, PILLION STEP	2 2		
		17	50711-MA6-000	BRACKET, R. PILLION STEP	1 1		
		18	50712-MA6-000	BRACKET, L. PILLION STEP	1 1		
		19	50712-413-000	WASHER, PILLION STEP	2 2		
		20	50715-MA6-000	BAR, PILLION STEP	2 2		
		21	90105-422-000	BOLT, SOCKET, 8X28	2 2	2007137	2007136
			90105-MA6-750	BOLT, SOCKET, 8X28	2 2		
		22	90106-MA6-000	BOLT, SOCKET, 10X32	2 2	2007137	2007136
			90106-MA6-750	BOLT, SOCKET, 10X32	2 2		
		23	90208-438-000	NUT, FLANGE CAP, 8MM	2 2		
		24	90504-MA6-000	WASHER, 8.5X26	2 2		
		25	91455-MA6-750	CAP, SOCKET BOLT, 8MM	2 2	2007137	

I 8


F-21

Step

Repose pieds

Tritt

Estribo

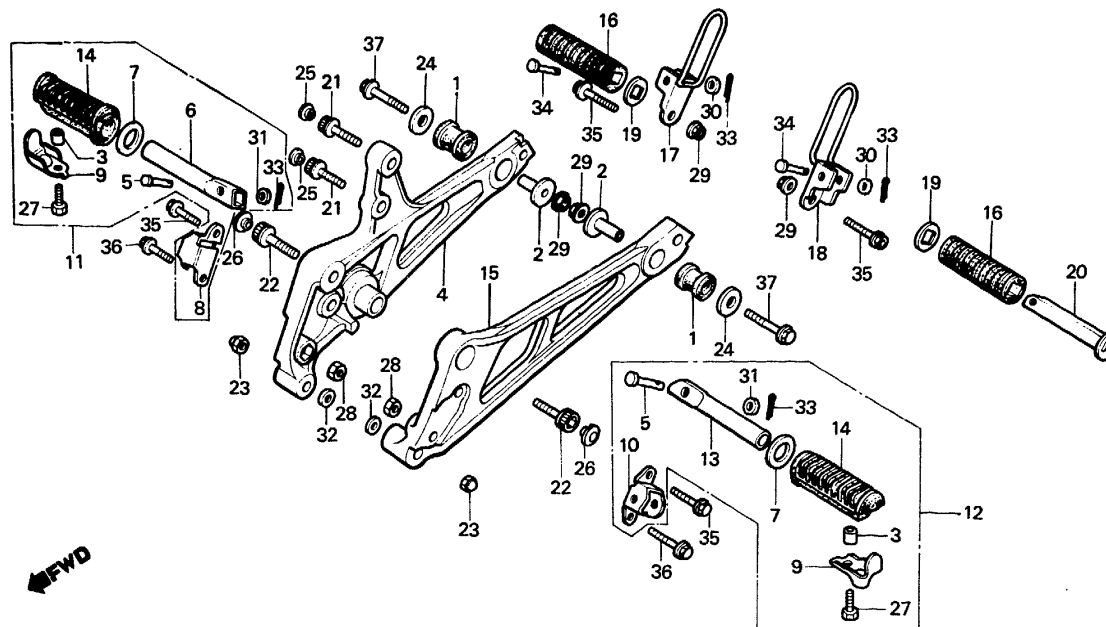

BMA6-41B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		26	91456-MA6-750	CAP, SOCKET BOLT, 8MM	2 2	2007137	
		27	92000-06016-1A	BOLT, HEX., 6X16	2 2		
		28	94030-08080	NUT, HEX., 8MM	2 2		
		29	94050-08000	NUT, FLANGE, 8MM	4 4		
		30	94101-06000	WASHER, PLAIN, 6MM	2 2		
		31	94101-08000	WASHER, PLAIN, 8MM	2 2		
		32	94101-08200	WASHER, PLAIN, 8MM	2 2		
		33	94201-16150	PIN, SPLIT, 1.6X15	4 4		
		34	95015-81000	PIN A, PILLION STEP	2 2		
		35	95700-08028-00	BOLT, FLANGE, 8X28	4 4		
		36	95700-08035-00	BOLT, FLANGE, 8X35	2 2		
		37	95700-08045-00	BOLT, FLANGE, 8X45	2 2		

I 9


F-22

Stand

Bequille

Ständer

Estante

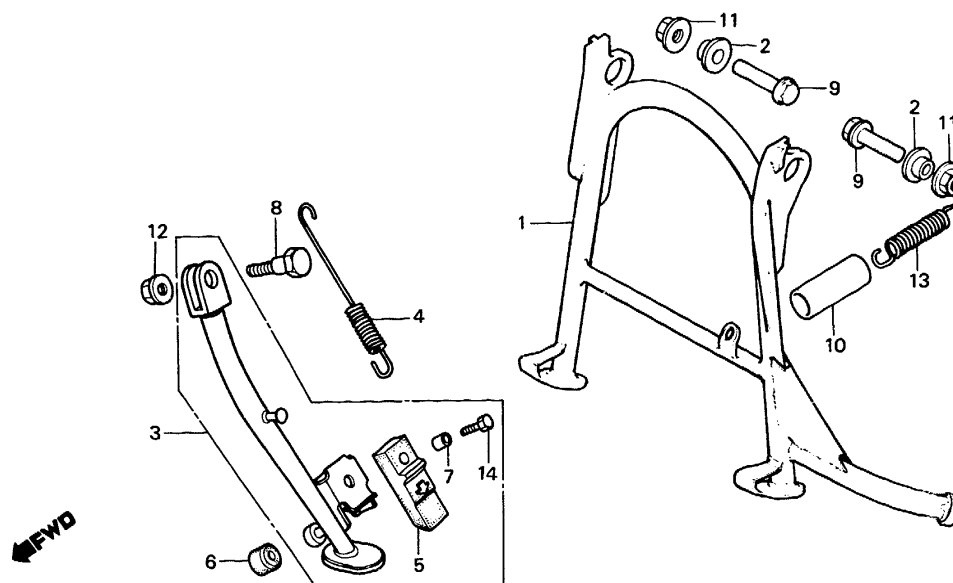

BMA6-42A

Service item	F.R.T.	Ref. No.	Part No.	Description	Regd. No. CBX400 Fc F2c	Serial No.	Area code
STAND COMP., MAIN	0.5	1	50500-MA6-000	STAND COMP., MAIN	1 1		
BAR ASSY., SIDE STAND	0.2	2	50503-MA6-000	COLLAR, MAIN STAND	2 2		
• SPRING G, MAIN STAND		3	50540-MA6-600	BAR ASSY., SIDE STAND	1 1		
SPRING, SIDE STAND	0.1	4	50543-MA6-000	SPRING, SIDE STAND	1 1		
		5	50548-356-700	RUBBER, STAND	1 1		
		6	50548-438-000	RUBBER, SIDE STAND	1 1		
		7	50549-356-700	COLLAR, STAND RUBBER SETTING	1 1		
		8	90108-223-000	SCREW, SIDE STAND PIVOT	1 1		
		9	90119-671-000	BOLT, FR. RADIUS ROD	2 2		
		10	90125-410-000	COVER, MAIN STAND SPRING	1 1		
		11	90304-GA6-003	NUT, AXLE, 10MM	2 2		
		12	94050-10000	NUT, FLANGE, 10MM	1 1		

I 10


F-22

Stand

Bequille

Ständer

Estante

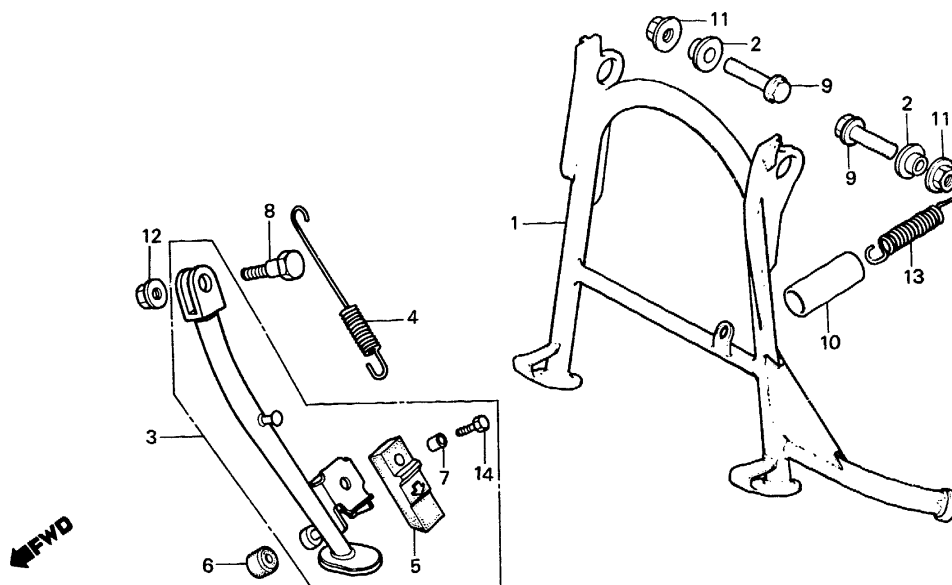

BMA6-42A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		13	95014-71702	SPRING G, MAIN STAND	1 1		
		14	95700-06028-00	BOLT, FLANGE, 6X28	1 1		


F-23

Rear fork • Chain case

Fourche arrière • Carter de chaîne

Hintere Schwinge • Kettenschutz

Horquilla trasera • Caja de cadena

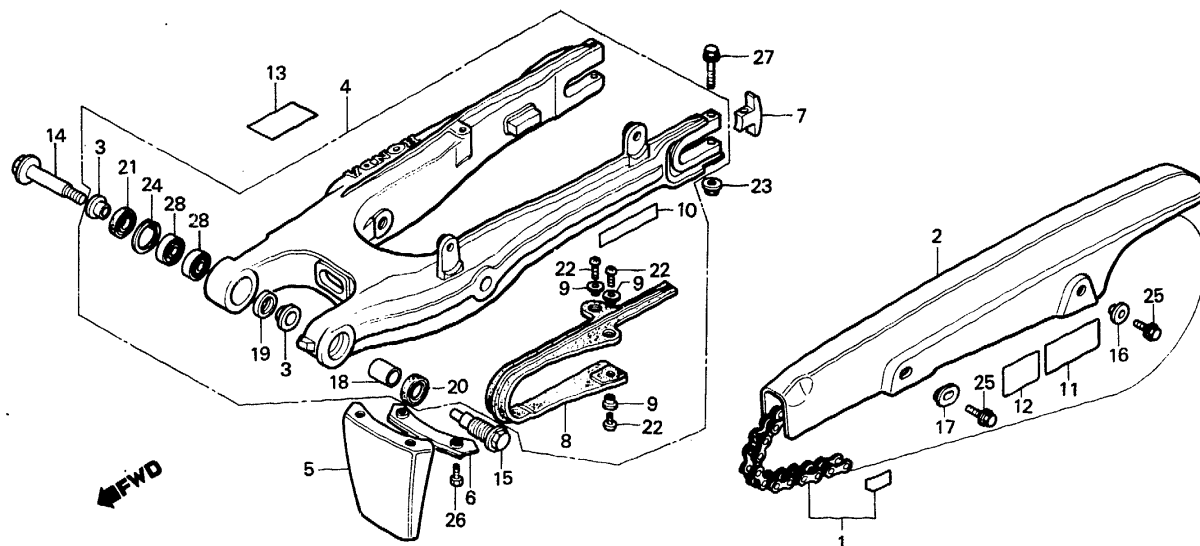

BMA6-43B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
CHAIN SET, DRIVE	0.9	1	405A3-MA6-621	CHAIN SET, DRIVE	1 1	2007137	2007136
CASE, DRIVE CHAIN	0.1			(50HL-104LE, DAIDO)			
FORK ASSY., RR.	1.3		405A3-460-791	CHAIN SET, DRIVE	1 1		
• BEARING, RR. FORK PIVOT				(50S0-104 TAKASAGO)			
(ONE OR ALL)		2	40510-MA6-000	CASE, DRIVE CHAIN	1 1		
SLIDER, CHAIN	0.3	3	52102-MA6-000	COLLAR, RR. FORK PIVOT	2 2		
		4	52110-MA6-000	FORK ASSY., RR.	1 1		
			52110-MA6-750	FORK ASSY., RR.	1 1		
		5	52118-MA6-000	GUARD, RR. CUSHION	1 1		
		6	52119-MA6-000	PLATE, RR. CUSHION GUARD	1 1		
		7	52136-MA6-000	STOPPER, CHAIN ADJUSTER	2 2		
		8	52170-MA6-000	SLIDER, CHAIN (A)	1 1		
		9	64203-166-610	COLLAR, FAIRING STAY	3 3		
		10	87503-MA2-300	EMBLEM, RR. FORK	2 2		ED,F
		11	87505-MA6-620	MARK, TIRE CAUTION	1 1		F
			87505-MA7-600	MARK, TIRE CAUTION	1 1		ED,U

I 12


F-23

Rear fork • Chain case

Fourche arrière • Carter de chaîne

Hintere Schwinge • Kettenschutz

Horquilla trasera • Caja de cadena

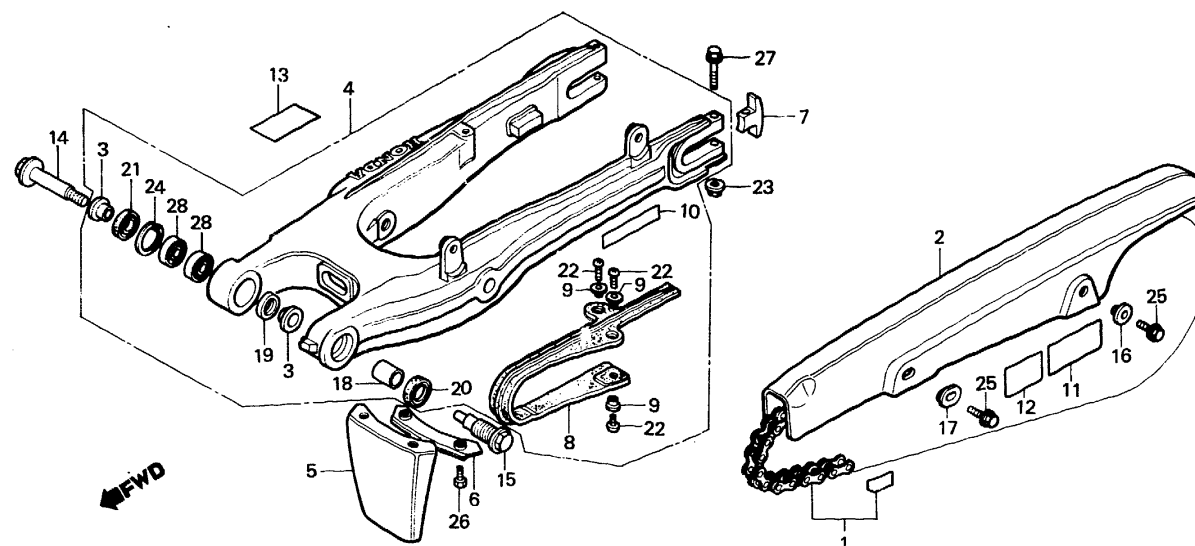

BMA6-43B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		12	87507-443-630	MARK, DRIVE CHAIN CAUTION	1 1		ED,U
			87507-443-690	MARK, DRIVE CHAIN CAUTION	1 1		F
		13	87518-MA6-620	LABEL, RR. CUSHION CAUTION	1 1	2007136	F
				(FRENCH)			
			87518-MA6-630	LABEL, RR. CUSHION CAUTION	1 1		ED
		14	90121-MA6-000	BOLT, R. RR. FORK PIVOT	1 1		
		15	90221-MA6-000	BOLT, L. RR. FORK PIVOT	1 1		
		16	90512-422-000	WASHER, CHAIN CASE SETTING	1 1		
		17	90513-405-000	WASHER, 6X9	1 1		
		18	91071-MA0-003	BEARING, RR. FORK PIVOT (TOYO)	1 1		
			91071-MA0-004	BEARING, RR. FORK PIVOT	1 1		
				(TOMUSON)			


F-23

Rear fork • Chain case

Fourche arrière • Carter de chaîne

Hintere Schwinge • Kettenschutz

Horquilla trasera • Caja de cadena

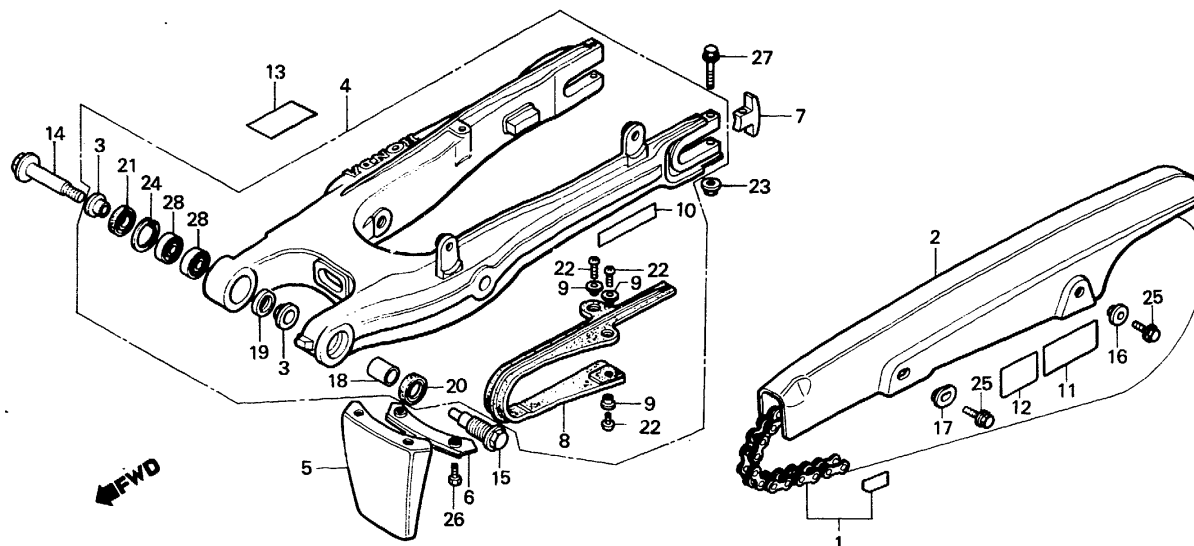

BMA6-43B

Service item	F.R.T.	Ref. No.	Part No.	Description	Regd. No. CBX400 Fc F2c	Serial No.	Area code
		19	91203-148-003	OIL SEAL, 24X34X5.5	1 1		
			91203-148-005	OIL SEAL, 24X34X5.5	1 1		
		20	91213-MA6-003	DUST SEAL, 21X35X7 (ARAI)	1 1		
			91213-MA6-006	DUST SEAL, 21X35X7 (NIPPON)	1 1		
		21	91214-MA6-003	DUST SEAL, 24X40X5.5 (ARAI)	1 1		
			91214-MA6-006	DUST SEAL, 24X40X5.5 (NIPPON)	1 1		
		22	93500-05008-1H	SCREW, PAN, 5X8	3 3		
		23	94050-06000	NUT, FLANGE, 6MM	2 2		
		24	94520-40000	CIRCLIP, INTERNAL, 40MM	1 1		
		25	95700-06012-07	BOLT, FLANGE, 6X12	2 2		
		26	95700-06012-08	BOLT, FLANGE, 6X12	2 2		
		27	95800-06060-10	BOLT, FLANGE, 6X60	2 2	2007136	
			95800-06060-00	BOLT, FLANGE, 6X60	2 2	2007137	

I 14


F-23

Rear fork • Chain case

Fourche arrière • Carter de chaîne

Hintere Schwinge • Kettenschutz

Horquilla trasera • Caja de cadena

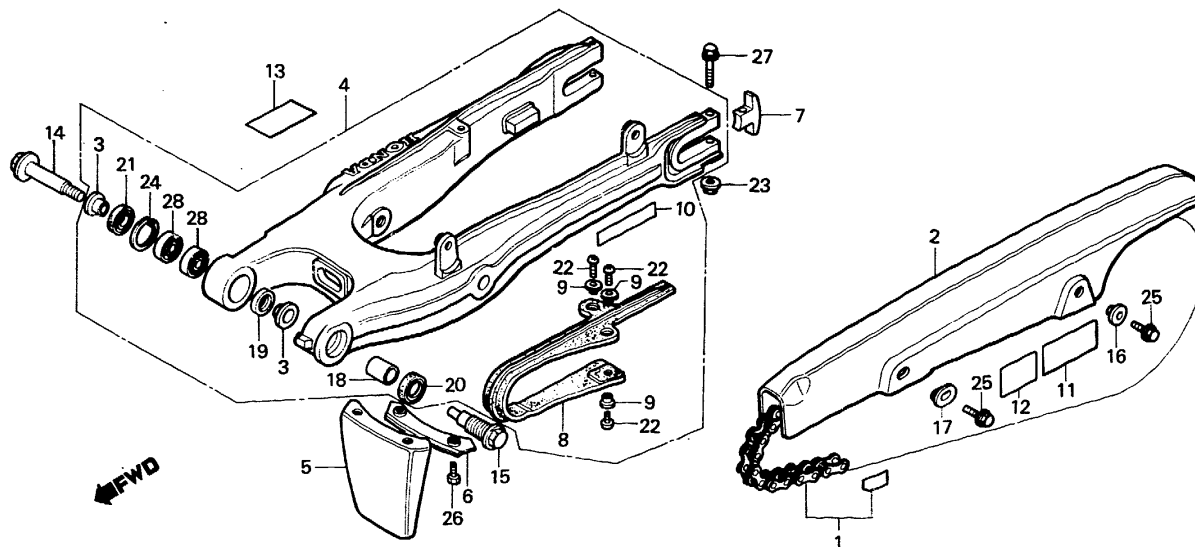

BMA6-43B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		28	96100-62030-10	BEARING, BALL, 6203	2 2		

I 15


F-24

Rear cushion

Amortisseur arrière

Hinterer Stoßdämpfer

Amortiguador trasero

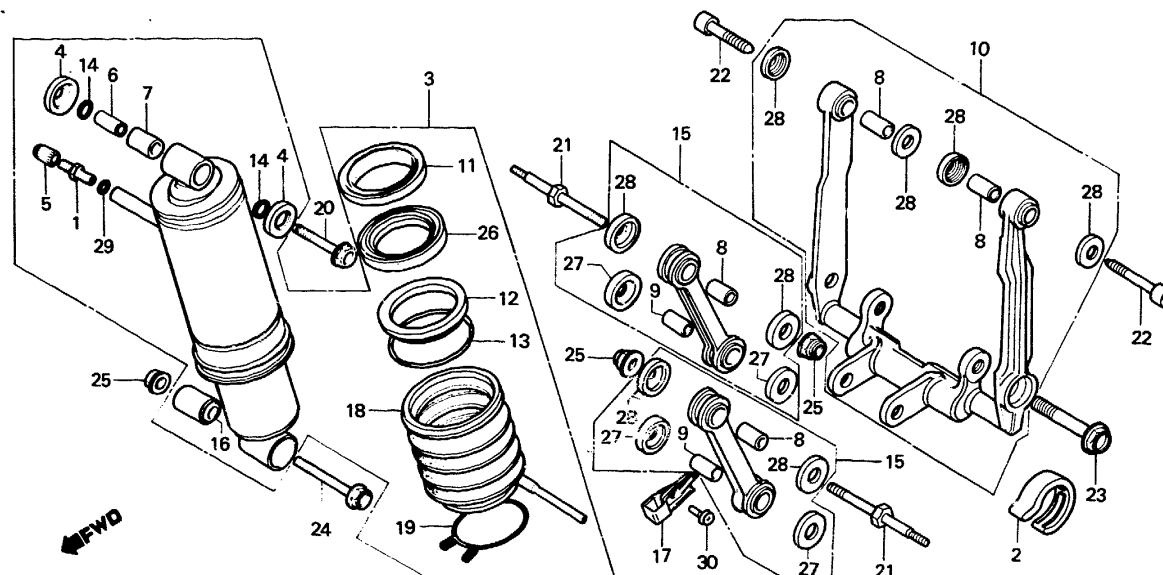

BMA6-44A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CbX400 Fc FZc	Serial No.	Area code
VALVE COMP., AIR	0.2	1	51456-469-013	VALVE COMP., AIR (SHOWA)	1 1	2007136	
CUSHION ASSY., RR.	0.8	2	52180-MA6-000	SLIDER, CHAIN (B)	1 1		
ARM ASSY., CUSHION	0.6	3	52400-MA6-621	CUSHION ASSY., RR.	1 1		
ROD ASSY., CUSHION CONNECTING			52400-MA6-761	CUSHION ASSY., RR.	1 1		
BUSH, DAMPER	0.9	4	52406-MC7-003	CAP	2 2		
OIL SEAL	1.2	5	52425-169-003	CAP, AIR VALVE (SHOWA)	1 1	2005263	2005262
		6	52452-MA1-731	METAL, BUSH	1 1		
		7	52453-MA1-731	COLLAR, BUSH	1 1		
		8	52462-MA2-000	COLLAR, CONNECTING ROD PIVOT	4 4		
		9	52462-MA6-000	COLLAR, CONNECTING ROD PIVOT	2 2		
		10	52470-MA6-000	ARM ASSY., CUSHION	1 1		
		11	52472-MA6-003	BUSH, GUIDE	1 1		
		12	52474-MA6-003	RING, BACK UP	1 1		
			52474-MA6-013	RING, BACK UP	1 1		
		13	52475-MA6-003	RING B, STOPPER	1 1		
			52475-MA6-013	RING B, STOPPER	1 1	2005263	

I 16


F-24

Rear cushion

Amortisseur arrière

Hinterer Stoßdämpfer

Amortiguador trasero

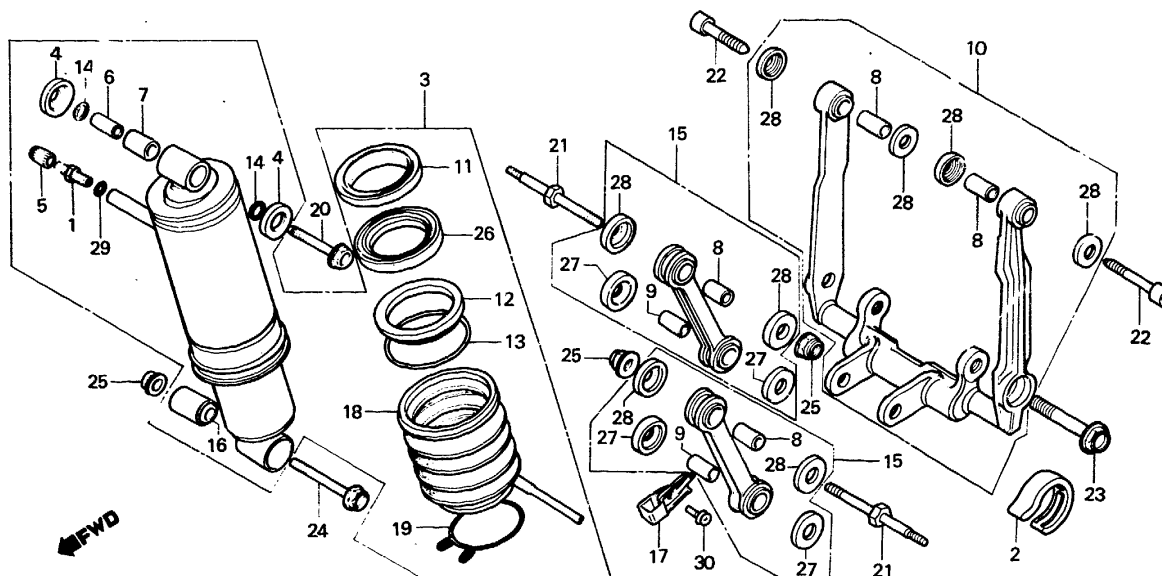

BMA6-44A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. C8X400 Fc F2c	Serial No.	Area code
		14	52479-17C7-003	O-RING, 14.5X1.5	2 2		
		15	52463-MA6-000	ROD ASSY., CUSHION CONNECTING	2 2		
		16	52485-MA2-003	BUSH, DAMPER	1 1		
		17	52501-MA2-000	CLAMP, DRAIN PIPE	1 1		2007136
		18	52611-MA6-003	BOOT COMP., RR. CUSHION	1 1		2007136
			52611-MA6-751	BOOT COMP., RR. CUSHION	1 1	2007137	
		19	52612-MA6-003	BAND, BOOT	1 1		
		20	90152-MA1-000	BOLT, FLANGE, 10X64	1 1		
		21	90185-MA6-000	BOLT, CONNECTING ROD	2 2		
		22	90186-MA6-000	BOLT, CUSHION ARM	2 2		
		23	90187-MA6-000	BOLT, FLANGE, 12X53	2 2		
		24	90188-MA6-000	BOLT, FLANGE, 10X79	1 1		
		25	90304-GA6-003	NUT, AXLE, 10MM	3 3		
		26	91257-MA6-003	OIL SEAL	1 1		

J 1


F-24

Rear cushion

Amortisseur arrière

Hinterer Stoßdämpfer

Amortiguador trasero

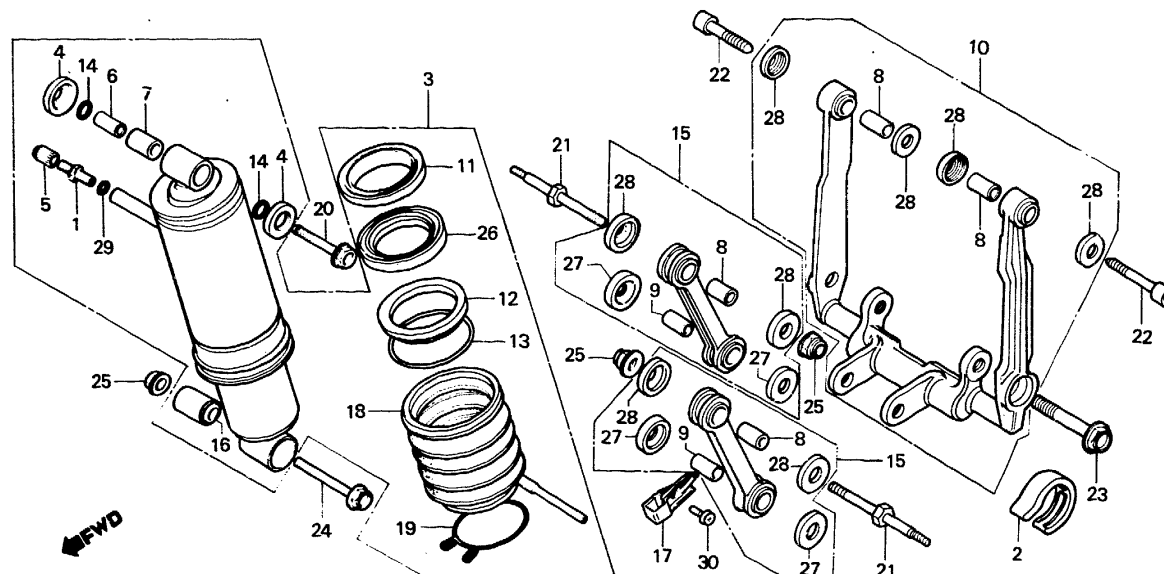

BMA6-44A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		27	91261-MA0-003	SEAL, CUSHION ARM PIVOT	4 4		
			91261-MA0-005	SEAL, CUSHION ARM PIVOT	4 4		
		28	91262-MA0-003	SEAL, RR. CUSHION CONNECTING ROD PIVOT	8 8		
			91262-MA0-005	SEAL, RR. CUSHION CONNECTING ROD PIVOT	8 8		
		29	91301-469-003	O-RING, 5.8X1.9	1 1		
		30	93891-05010-08	SCREW-WASHER, 5X10	1 1	2007136	

J 2


F-25

Rear fender

Garde-boue arrière

Hinterer Kotflügel

Parafango traseño

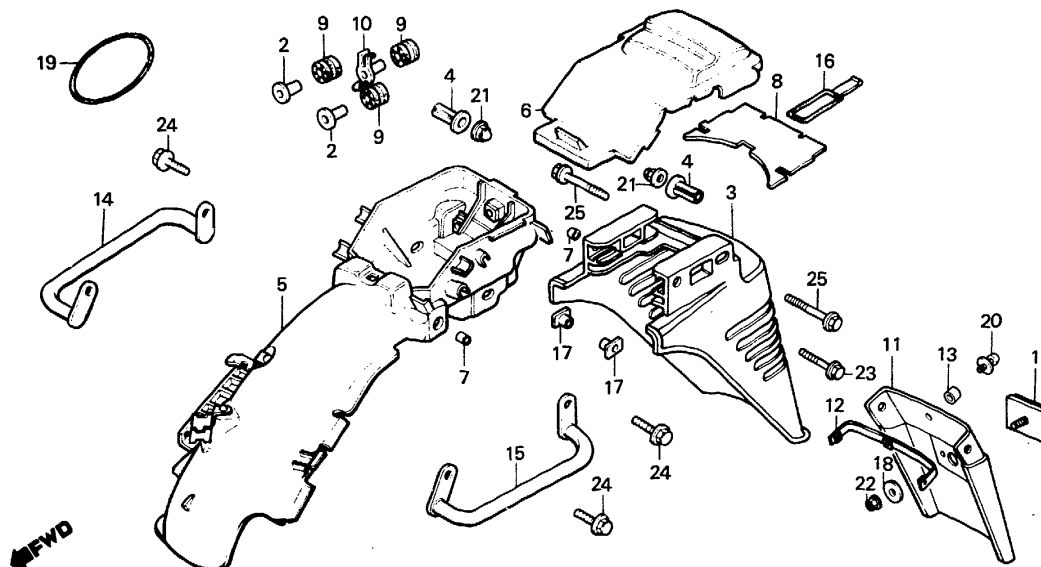

BMA6-45B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
FENDER A, RR.	0.2	1	33741-415-601	REFLECTOR, RR. REFLEX	1 1		
FENDER COMP. B, RR.	0.7	2	61104-428-000	COLLAR, FR. FENDER	2 2		
COVER, GLOVE BOX	0.1	3	80100-MA6-600	FENDER A, RR.	1 1		F
MUDGUARD, RR. FENDER			80100-MA6-630	FENDER A, RR.	1 1		ED,U
PIPE, R. RR. GRIP		4	80102-MA6-000	COLLAR, RR. FENDER SETTING (A)	2 2		
PIPE, L. RR. GRIP		5	80105-MA6-000	FENDER COMP. B, RR.	1 1	2007137	2007136
			80105-MA6-750	FENDER COMP. B, RR.	1 1		
		6	80106-MA6-000	COVER, GLOVE BOX	1 1		
		7	80108-MA6-000	COLLAR B, RR. FENDER	4 4		
		8	80111-MA6-750	PLATE, TOOL SETTING	1 1	2007137	
		9	80112-MA6-000	CUSHION, TAILLIGHT	3 3		
		10	80114-MA6-000	WASHER, TOOL SETTING	1 1		
		11	80121-MA6-630	MUDGUARD, RR. FENDER	1 1		ED,U
		12	80122-MA6-630	STAY, MUDGUARD	1 1		ED,U
		13	80122-315-730	COLLAR, MUDGUARD SETTING	3 3		ED,U

J 3


F-25

Rear fender

Garde-boue arrière

Hinterer Kotflügel

Parafango trasero

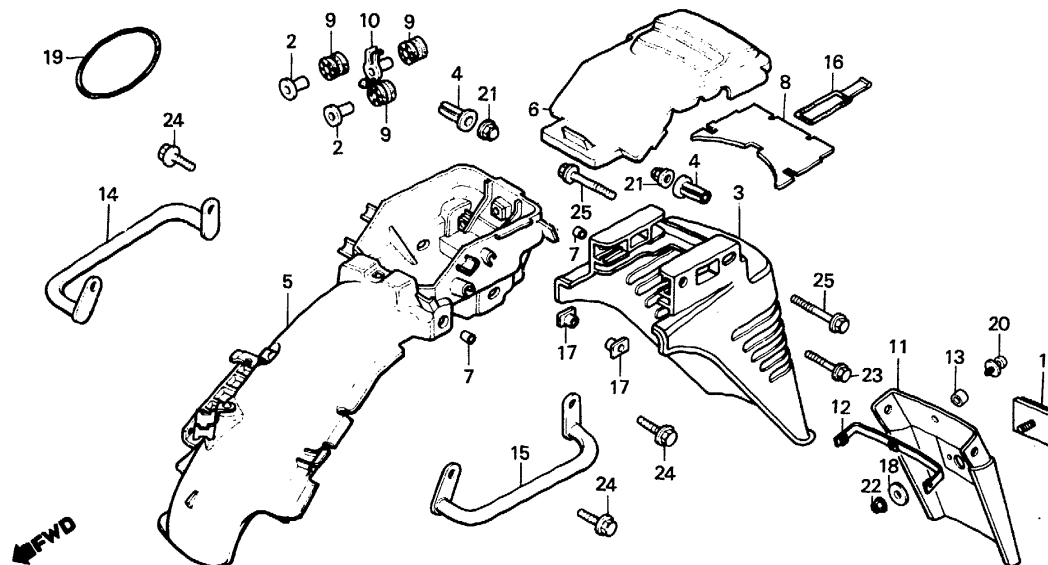

BMA6-45B

Service item	F.R.T.	Ref. No.	Part No.	Description	Regd. No. CBX400 Fc F2c	Serial No.	Area code
		14	84100-MA6-601	PIPE, R. RR. GRIP	1 1		
		15	84200-MA6-601	PIPE, L. RR. GRIP	1 1		
		16	89001-MA6-750	BAND, TOOL	1 1	2007137	
		17	90301-471-000	NUT, AIR CLEANER CASE	2 2		
		18	90401-373-770	WASHER, 6X20	1 1		ED,U
		19	91351-MA6-000	O-RING, 45X3.5	1 1	2007136	
		20	93894-06016-07	SCREW-WASHER, 6X16	3 3		ED,U
		21	94021-08000-0S	NUT, CAP, 8MM	2 2		
			94050-08000	NUT, FLANGE, 8MM	2 2	2007137	
		22	94050-06080	NUT, FLANGE, 6MM	1 1		ED,U
		23	95700-06025-00	BOLT, FLANGE, 6X25	2 2		
		24	95700-08016-00	BOLT, FLANGE, 8X16	4 4		
		25	95700-08050-00	BOLT, FLANGE, 8X50	2 2		

J 4


F-26

Winker

Clignotant

Blinker

Luz intermitente

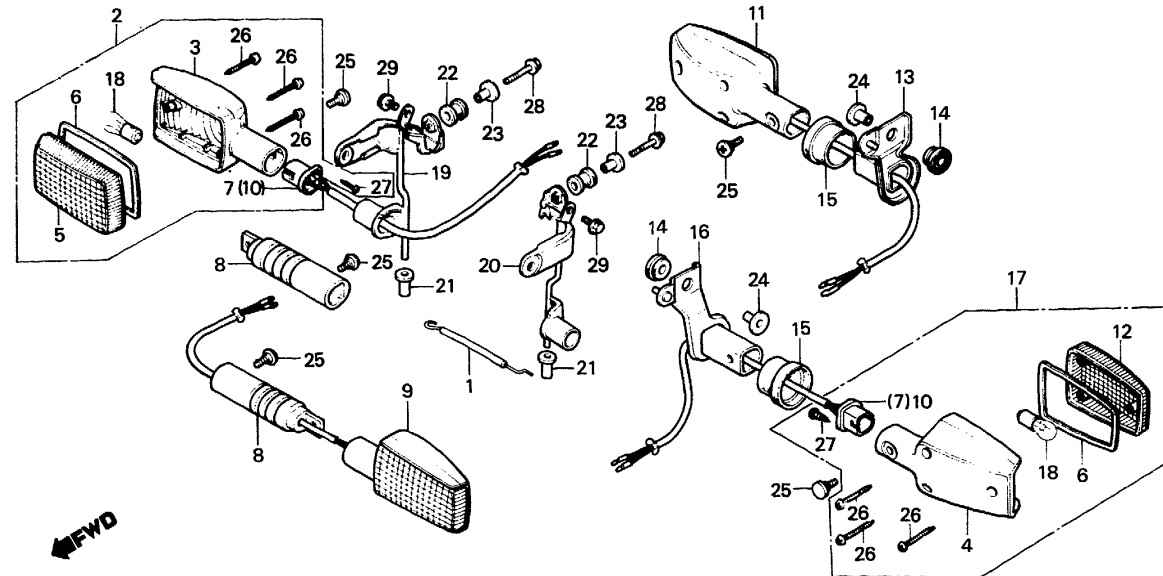

BMA6-46A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
WINKER ASSY. (ADD 0.1 FOR EACH.) (INC. RELATIVE PART) (EXC. RELATED PARTS BELOW)	0.2	1	32814-MA6-000	CLIP, WIRE HARNESS	1		
		2	33400-MA6-620	WINKER ASSY., R. FR.	1 1		ED,F U
		3	33400-MB0-003	WINKER ASSY., R. FR. (12V 23W)	1		
		4	33401-MA6-003	BASE, FR. WINKER	2 2		
		5	33401-MA6-621	BASE, WINKER	2 2		ED,F U
BULB (WHEN SERVICING COMP., UNIT, F.R.T. IS 0.2.)	0.1	6	33401-MA6-003	BASE, FR. WINKER	2		
		7	33402-MA6-003	LENS, WINKER	2 2		ED,F U
BRACKET, R. HEADLIGHT CASE (ADD 0.2 FOR EACH.)	0.4	8	33402-MA6-013	LENS, WINKER	2		
		9	33406-MA6-003	PACKING, LENS	4 4		
		10	33410-MA6-621	SOCKET COMP., R. WINKER	2 2		
		11	33441-MA6-620	STAY COMP., FR. WINKER	2		
		12	33450-MA6-620	WINKER ASSY., L. FR.	1 1		ED,F U
		13	33450-MB0-003	WINKER ASSY., L. FR. (12V 23W)	1		

J 5


F-26

Winker

Clignotant

Blinker

Luz intermitente

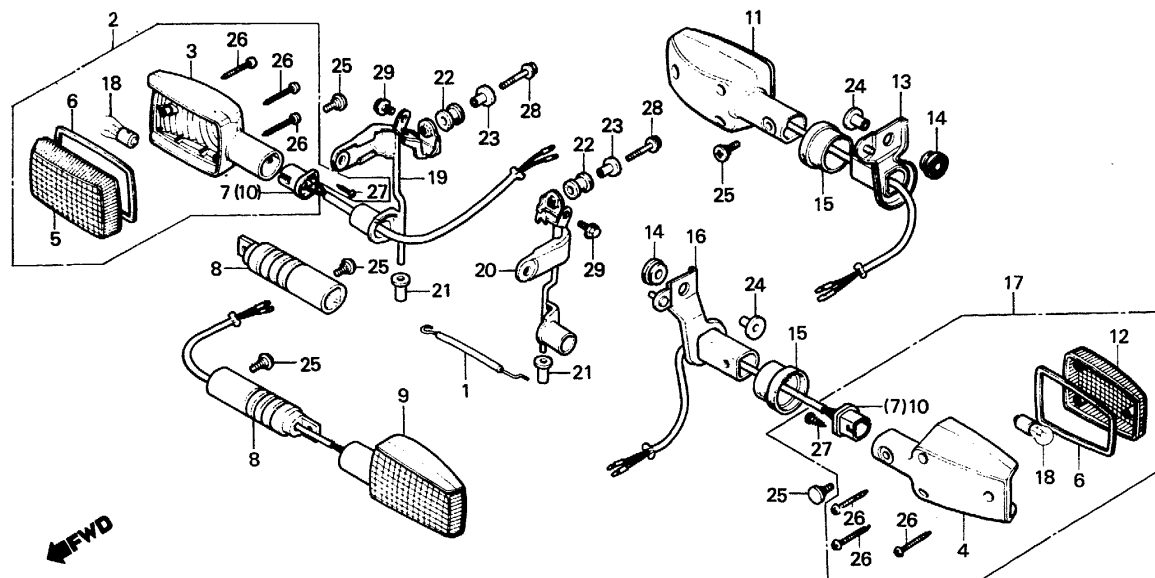

BMA6-46A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		10	33460-MA6-621	SOCKET COMP., L. WINKER	2 2		
		11	33600-MA6-621	WINKER ASSY., R. RR. (12V 23W)	1 1		ED,F
			33400-MB0-003	WINKER ASSY., R. FR. (12V 23W)	1 1		U
		12	33602-MA6-621	LENS, RR. WINKER	2 2		ED,F
			33402-MA6-013	LENS, WINKER	2 2		U
		13	33605-MA6-600	STAY, R. RR. WINKER	1 1		
		14	33606-MA6-600	RUBBER, RR. WINKER MOUNTING	2 2		
		15	33607-MA6-600	COVER, RR. WINKER	2 2		
		16	33615-MA6-600	STAY, L. RR. WINKER	1 1		
		17	33650-MA6-621	WINKER ASSY., L. RR. (12V 21W)	1 1		ED,F

J 6


F-26

Winker

Clignotant

Blinker

Luz intermitente

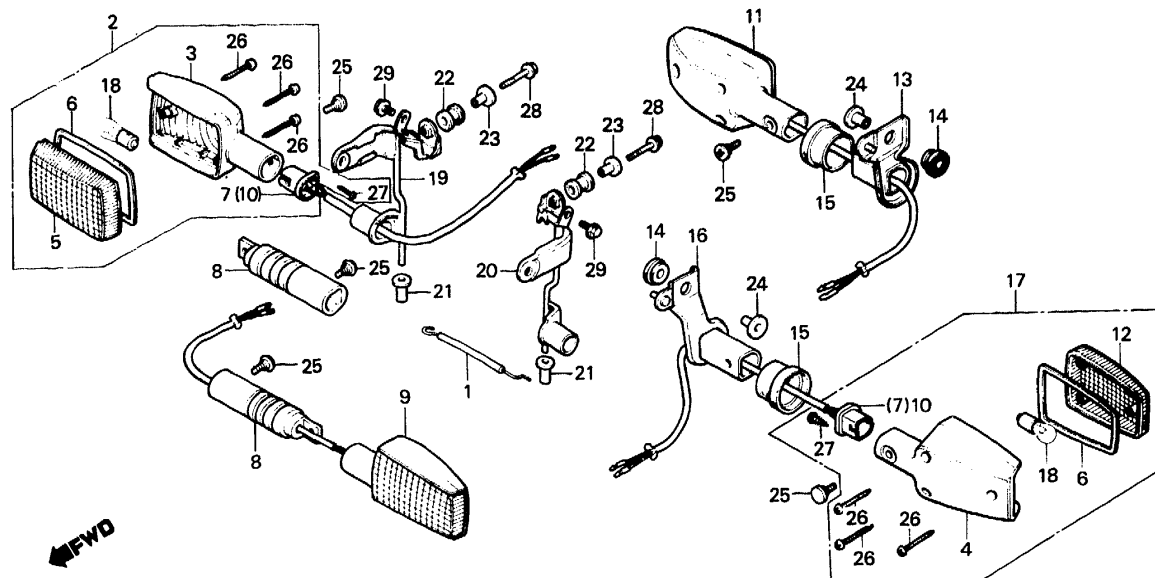

BMA6-46A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
			33450-MB0-003	WINKER ASSY., L. FR. (12V 23W)	1		U
		18	34908-634-611	BULB (12V21W)	4 4		
		19	61311-MA6-000	BRACKET, R. HEADLIGHT CASE	1	2000889	
			61311-MA6-620	BRACKET, R. HEADLIGHT CASE	1	2000890	
		20	61312-MA6-000	BRACKET, L. HEADLIGHT CASE	1	2000889	
			61312-MA6-620	BRACKET, L. HEADLIGHT CASE	1	2000890	
		21	61313-422-000	GROMMET B, HEADLIGHT	2 2		
		22	61318-MA6-000	RUBBER, HEADLIGHT BRACKET	2 2		
				MOUNTING			
		23	61319-MA6-000	COLLAR, 6.2X16	2 2		
		24	90370-MA6-600	COLLAR, RR. WINKER	2 2		
		25	90380-MA6-000	SCREW, SPECIAL, 6X11	6 4	2005262	
			90380-MA6-010	SCREW, SPECIAL, 6X12	6 4	2005263	
		26	91901-MA6-000	SCREW, TAPPING, 3X25	12 12		

J 7


F-26

Winker

Clignotant

Blinker

Luz intermitente

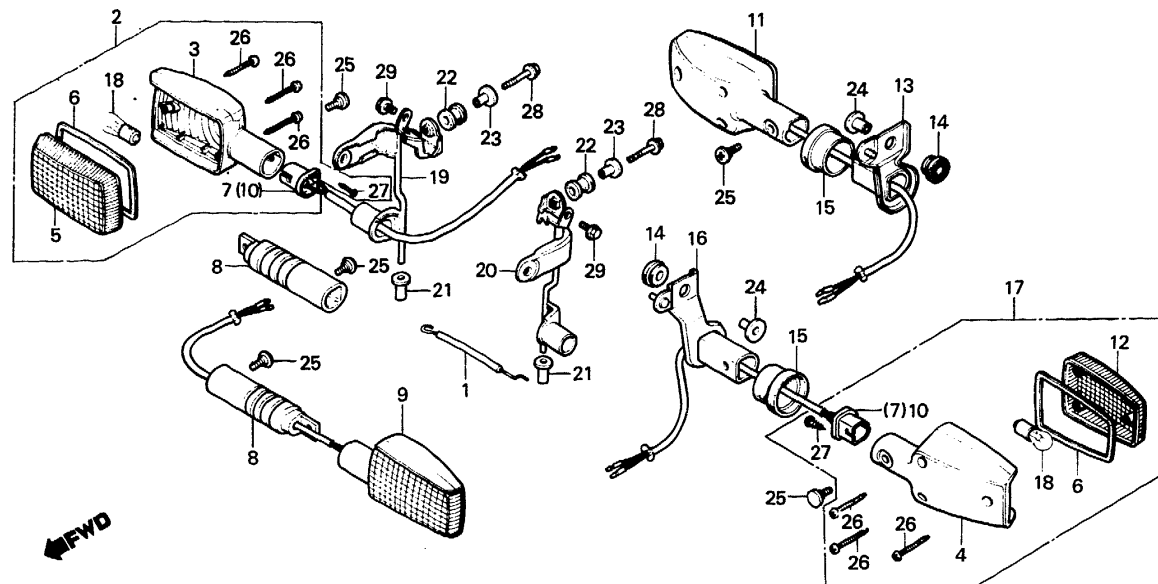

BMA6-46A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		27	93901-32320	SCREW, TAPPING, 3X12	4 4		
		28	95700-06028-00	BOLT, FLANGE, 6X28	2 2		
		29	95700-08014-07	BOLT, FLANGE, 8X14	2 2		

J 8


F-27

Taillight

Feu arrière

Rücklicht

Luz trasera

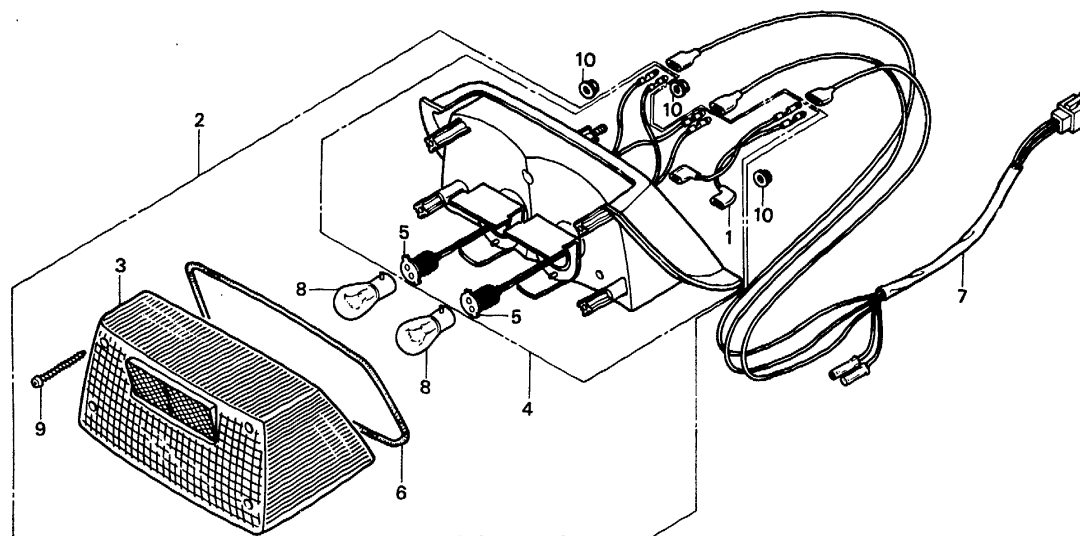

BMA6-47A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
TAILLIGHT UNIT	0.2	1	32112-GA7-003	SUB CORD B	2 2		
• BASE COMP., TAILLIGHT		2	33701-MA6-621	TAILLIGHT UNIT	1 1	2000867	ED,F
• SUB CORD, TAILLIGHT			33701-MA6-622	TAILLIGHT UNIT	1 1	2000868	ED,F
BULB, TAILLIGHT	0.1		33701-MA7-651	TAILLIGHT UNIT	1		U
		3	33702-MA6-621	LENS COMP., TAILLIGHT	1 1	2000867	
			33702-MA6-622	LENS COMP., TAILLIGHT	1 1	2000868	
		4	33703-MA6-621	BASE COMP., TAILLIGHT	1 1		ED,F
			33703-MA7-651	BASE COMP., TAILLIGHT	1		U
		5	33708-147-003	CORD COMP., TAILLIGHT	2 2		
		6	33709-MA6-621	PACKING, TAILLIGHT LENS	1 1		
		7	33711-MA6-620	SUB CORD, TAILLIGHT	1 1		
		8	34906-447-711	BULB, TAILLIGHT (12V21/5W)	2 2		
		9	93901-34610	SCREW, TAPPING, 4X25	4 4		
		10	94050-06000	NUT, FLANGE, 6MM	3 3		

J 9



F-28

Wire harness • Ignition coil

Faisceau électrique • Bobine d'allumage

Kabelbaum • Zündspule

**Eauipo de alambre •
Bobina de encendido**

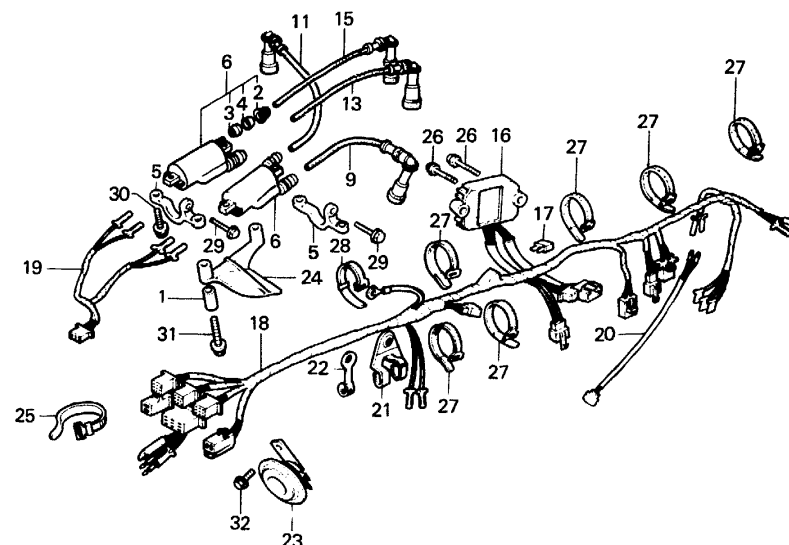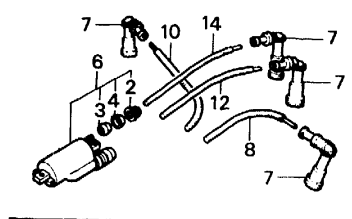

FWD

BMA6-48D

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
COIL COMP., IGNITION (ADD 0.1 FOR EACH.)	0.3	1	17202-415-000	COLLAR, AIR CLEANER BRACKET	2 2		
• RECTIFIER ASSY., REGULATOR		2	30501-428-003	CAP, SCREW	4 4		
• HARNESS A, SUB WIRE		3	30502-428-003	SEAL, RUBBER	4 4		
CORD, HIGH TENSION	0.2	4	30503-428-003	WASHER, CAP	4 4		
(WHEN SERVICING COMP., UNIT, F.R.T. 'S 0.3.)		5	30505-MA6-000	BRACKET, IGNITION COIL	2 2		
• RECTIFIER ASSY., SILICON		6	30510-MA6-003	COIL COMP., IGNITION	2 2		
HARNESS, WIRE	1.2	7	30700-MA6-000	CAP ASSY., NOISE SUPPRESSOR	4 4	2007136	
HORN COMP., HIGH	0.1	8	30751-MA6-000	CORD, HIGH TENSION (1-1)	1 1	2007136	
		9	30751-MA6-750	CORD, HIGH TENSION (1-1)	1 1	2007137	
		10	30752-MA6-000	CORD, HIGH TENSION (2-4)	1 1	2007136	
		11	30752-MA6-750	CORD, HIGH TENSION (2-4)	1 1	2007137	
		12	30753-MA6-000	CORD, HIGH TENSION (3-2)	1 1	2007136	
		13	30753-MA6-750	CORD, HIGH TENSION (3-2)	1 1	2007137	
		14	30754-MA6-000	CORD, HIGH TENSION (4-3)	1 1	2007136	
		15	30754-MA6-750	CORD, HIGH TENSION (4-3)	1 1	2007137	

J 10



F-28

Wire harness • Ignition coil

Faisceau électrique • Bobine d'allumage

Kabelbaum • Zündspule

**Eauipo de alambre •
Bobina de encendido**

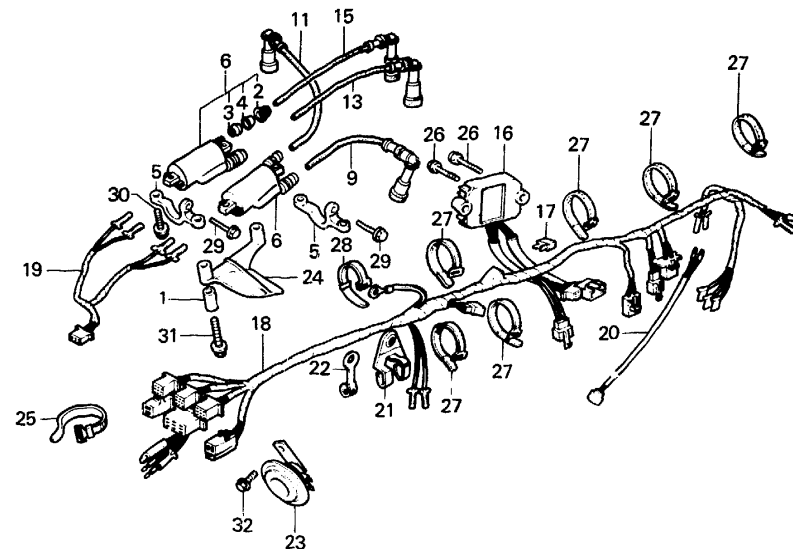

FWD

BMA6-48D

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		16	31600-MA6-000	RECTIFIER ASSY., REGULATOR	1 1		
		17	31700-124-003	RECTIFIER ASSY., SILICON	1 1		
			31700-124-008	RECTIFIER ASSY., SILICON	1 1		
				(STANLEY)			
				(SHINDENGEN)			
		18	32100-MA6-000	HARNESS, WIRE	1 1	2007137	2007136
			32100-MA6-750	HARNESS, WIRE	1 1	2007137	
			32350-MA7-840	HARNESS, WIRE	1 1		
		19	32102-MA6-000	HARNESS A, SUB WIRE	1 1		
		20	32107-MA6-000	HARNESS C, SUB WIRE	1 1		
		21	32812-MA6-000	CLIP A, WIRE HARNESS	1 1	2007137	2007136
			32812-MA6-750	CLIP A, WIRE HARNESS	1 1		
		22	32813-MA6-000	CLIP, CLUTCH CABLE	1 1		
		23	38110-MA6-004	HORN COMP., HIGH	1 1		
		24	50750-MA6-000	GUIDE, AIR	1 1		
		25	90650-MA6-720	BAND, WIRE HARNESS	1		

J 11



F-28

Wire harness • Ignition coil

Faisceau électrique • Bobine d'allumage

Kabelbaum • Zündspule

Equipo de alambre • Bobina de encendido

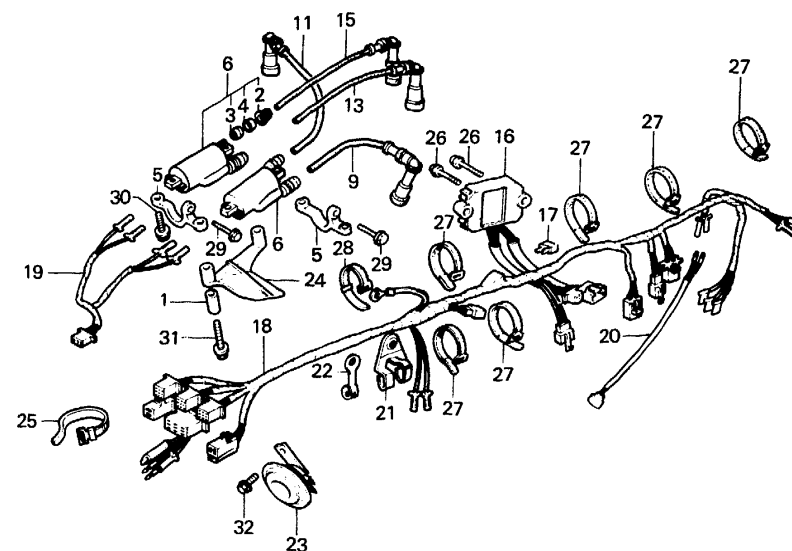

FWD

BMA6-48D

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No.		Serial No.	Area code
					CBX400 Fc	F2c		
		26	92500-06035-0A	BOLT, CAP, 6X35	2	2		
		27	95014-61100	BAND A1, WIRE	6	6		
		28	95014-61300	BAND A3, WIRE	2	2		
		29	95700-06016-00	BOLT, FLANGE, 6X16	2	2		
		30	95700-06020-08	BOLT, FLANGE, 6X20	2	2		
		31	95700-06040-08	BOLT, FLANGE, 6X40	2	2		
		32	95700-08012-00	BOLT, FLANGE, 8X12	1	1		

J 12


F-29

Frame body

Cadre

Rahmen

Cuerpo de cuadro

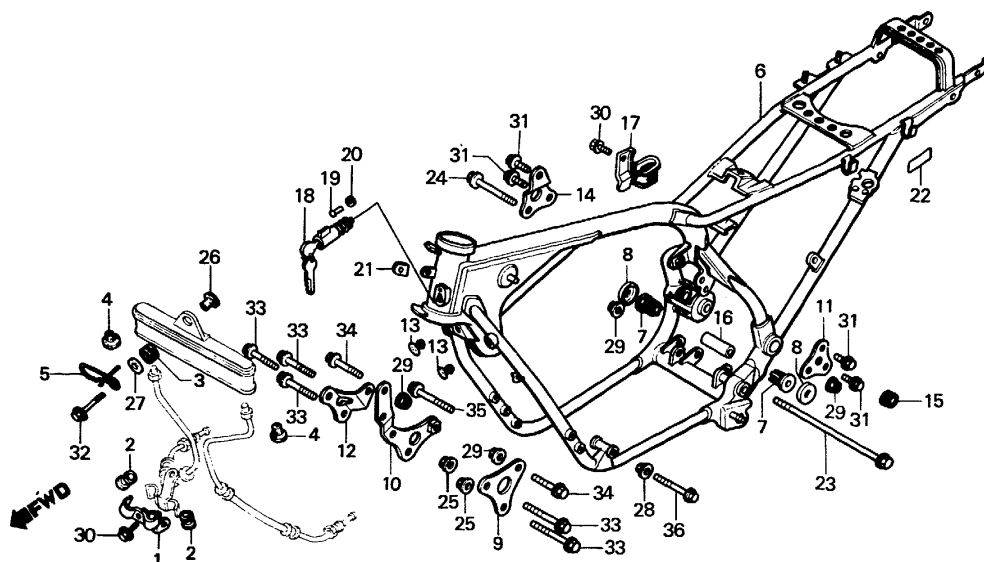

BMA6-49A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
BODY COMP., FRAME	*8.0	1	15519-MA6-000	CLAMP B, OIL PIPE	1 1		
LOCK COMP., STEERING HANDLE	0.1	2	15521-MA6-000	RUBBER, OIL PIPE CUSHION	2 2		
		3	15604-MA6-000	GROMMET, UPPER OIL COOLER	1 1		
		4	15605-MA6-000	GROMMET, OIL COOLER	2 4		
		5	32110-MA6-000	CLAMP, WIRE HARNESS	1		ED,F
			32110-MA7-000	CLAMP, WIRE HARNESS	1		U
			32110-MA6-720	CLAMP, TACHOMETER CABLE	1		
		6	50100-MA6-600ZA	BODY COMP., FRAME *NH-1*	1 1		F,U
			50100-MA6-610ZA	BODY COMP., FRAME *NH-1*	1 1		ED
		7	50201-MA6-000	RUBBER, ENGINE MOUNTING	2 2		
		8	50203-MA6-000	WASHER, ENGINE MOUNTING	2 2		
		9	50351-MA6-000	PLATE, L. FR. ENGINE HANGER	1 1		
		10	50352-MA6-000	PLATE, FR. ENGINE HANGER	1 1		

J 13


F-29

Frame body

Cadre

Rahmen

Cuerpo de cuadro

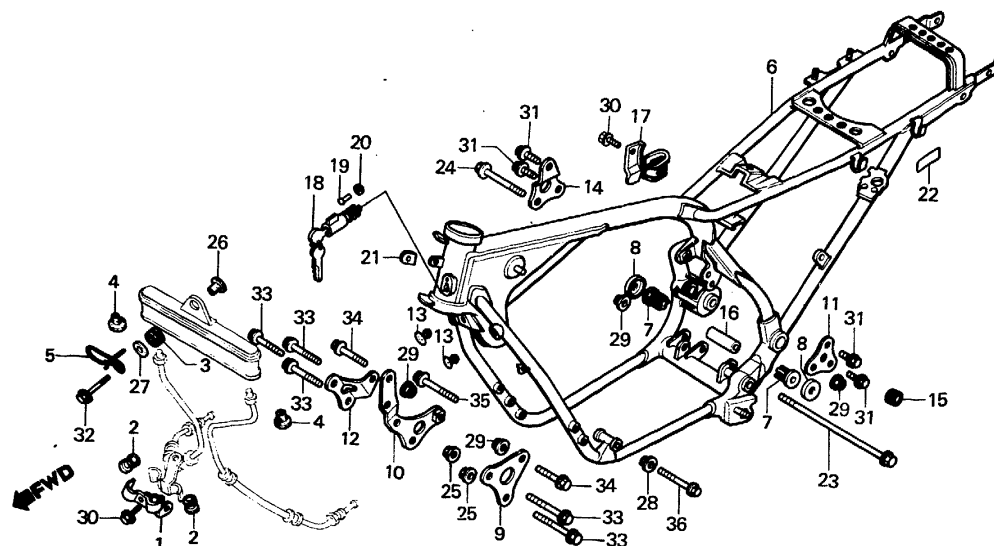

BMA6-49A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CbX400 Fc F2c	Serial No.	Area code
		11	50353-MA6-000	PLATE, ENGINE HANGER UPPER	1 1		
		12	50354-MA6-000	PLATE, R. FR. ENGINE HANGER	1 1		
		13	50354-422-000	PLUG, ENGINE HANGER	2		
		14	50355-MA6-000	PLATE, ENGINE HANGER UPPER	1 1		
		15	50356-MA6-000	GROMMET	2		
		16	50362-MA6-000	COLLAR, DISTANCE	1 1		
		17	50527-MA6-000	GUIDE, DRAIN TUBE	1 1		
		18	53600-404-611	LOCK COMP., STEERING HANDLE	1 1		ED
		19	53603-051-000	RIVET, 4.1MM	1 1		ED
		20	53604-098-940	WASHER, 4.5MM	1 1		ED
		21	64530-MA6-000	CAP, FAIRING BRACKET	1		
		22	87511-323-670	LABEL, HELMET HOLDER	1 1		
		23	90125-MA6-000	BOLT, RR. ENGINE HANGER LOWER	1 1		

J 14


F-29

Frame body

Cadre

Rahmen

Cuerpo de cuadro

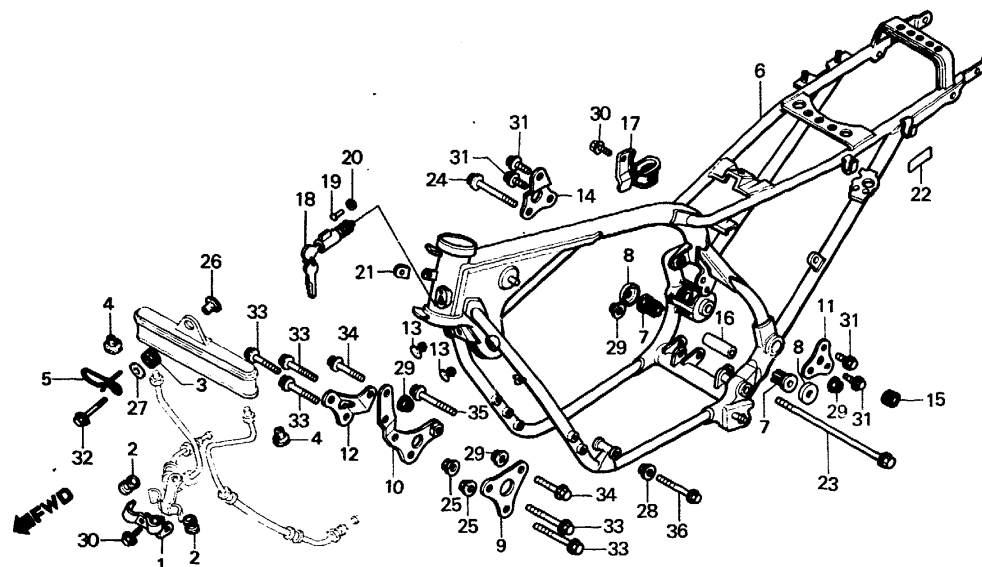

BMA6-49A

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		24	90126-MA6-000	BOLT, RR. ENGINE HANGER UPPER	1 1		
		25	90309-428-731	NUT, FLANGE, 8MM	5 5		
		26	90551-MA6-000	COLLAR, 8.6X14	1 1		
		27	90552-MA6-000	WASHER, 8MM	1 1		
		28	94030-10000	NUT, HEX., 10MM	1 1		
		29	94050-10000	NUT, FLANGE, 10MM	4 4		
		30	95700-06012-07	BOLT, FLANGE, 6X12	2 2		
		31	95700-08018-00	BOLT, FLANGE, 8X18	4 4		
		32	95700-08032-07	BOLT, FLANGE, 8X32	1 1		
			95700-08045-07	BOLT, FLANGE, 8X45	1 1		
		33	95800-08060-00	BOLT, FLANGE, 8X60	5 5		
		34	95800-10040-00	BOLT, FLANGE, 10X40	2 2		
		35	95800-10045-00	BOLT, FLANGE, 10X45	1 1		
		36	95800-10080-00	BOLT, FLANGE, 10X80	1 1		

J 15


F-30

Tool

Outils

Werkzeug

Herramientas

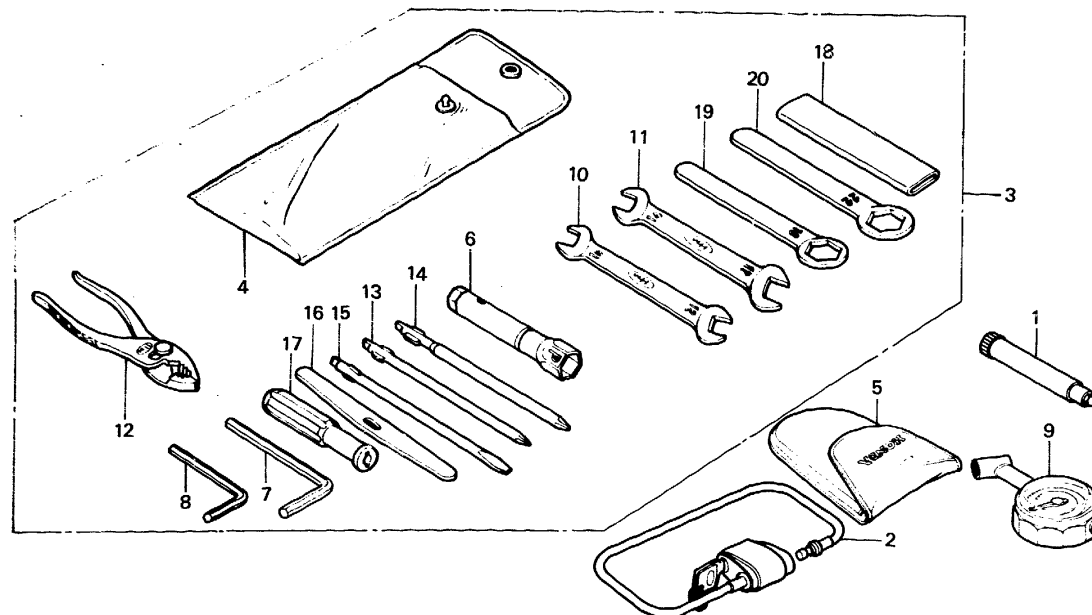

BMA6-50B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc FZc	Serial No.	Area code
		1	51480-MB1-731	VALVE, EXTENSION	1 1	2007137	
		2	88800-MA6-601	CABLE, SECURITY LOCKING	1 1		
		3	89010-MA6-600	TOOL SET	1 1	2007136	
			89010-MA6-760	TOOL SET	1 1	2007137	
		4	89101-MA6-620	BAG, TOOL	1 1	2007136	
			89101-MA6-760	BAG, TOOL	1 1	2007137	
		5	89102-469-003	BAG, AIR PRESSURE GAUGE	1 1		
		6	89216-438-000	WRENCH, PLUG	1 1		
		7	89221-371-000	WRENCH, HEX., 6MM	1 1		
		8	89221-429-000	WRENCH, HEX., 5MM	1 1		
		9	89301-463-771	GAUGE, AIR PRESSURE	1 1		
		10	99001-10120	SPANNER, 10X12	1 1		
		11	99001-14170	SPANNER, 14X17	1 1		
		12	99002-13500	PLIERS, 135	1 1		
		13	99003-10000	DRIVER 2, PLUS SCREW	1 1		
		14	99003-20000	DRIVER 2, PLUS SCREW	1 1		
		15	99003-30000	DRIVER 2, MINUS SCREW	1 1		

J 16


F-30

Tool

Outils

Werkzeug

Herramientas

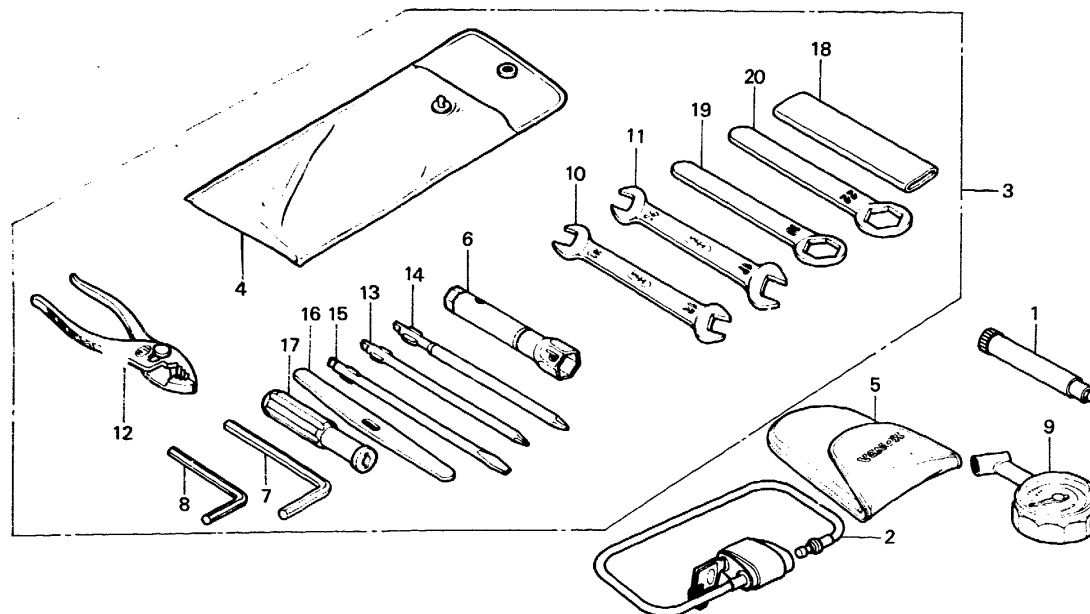

8MA6-50B

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		16	99003-40000	LEVER	1 1		
		17	99003-50000	GRIP	1 1		
		18	99006-12000	HANDLE, EYE WRENCH, 12MM	1 1		
		19	99006-19000	WRENCH, EYE, 19MM	1 1		
		20	99006-22000	WRENCH, EYE, 22MM	1 1		

K 1




F-31

**Emblem
(CBX400Fc)**

**Embleme
(CBX400Fc)**

**Emblem
(CBX400Fc)**

**Emblema
(CBX400Fc)**

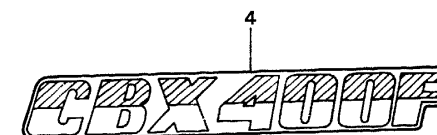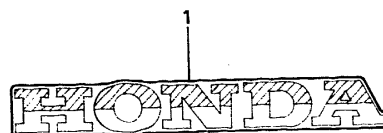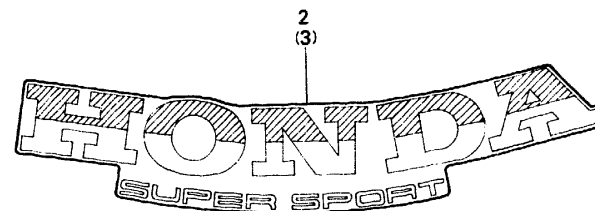

BMA6-51

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		1	87110-MA6-000ZA	EMBLEM, SEAT COWL *TYPE-1*	1		
		2	87121-MA6-300ZA	EMBLEM, R. FUEL TANK *TYPE-1*	1		
		3	87122-MA6-300ZA	EMBLEM, L. FUEL TANK *TYPE-1*	1		
		4	87126-MA6-300ZA	EMBLEM, SIDE COVER *TYPE-1*	2		

K 2


F-32

Stripe
(CBX400Fc • F2c)

Rayure
(CBX400Fc • F2c)

Streifen
(CBX400Fc • F2c)

Franja
(CBX400Fc • F2c)

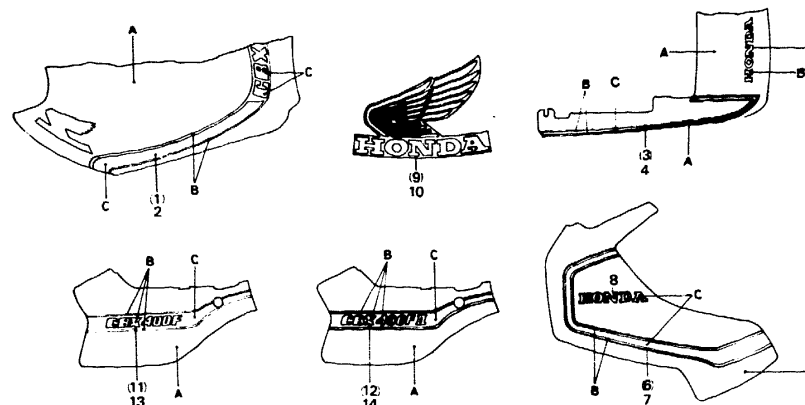

BMA6-52

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		1	17508-MA6-620ZA STRIPE, R. FUEL TANK *TYPE-1*		1	1	
			17508-MA6-620ZB STRIPE, R. FUEL TANK *TYPE-2*		1	1	
		2	17509-MA6-620ZA STRIPE, L. FUEL TANK *TYPE-1*		1	1	
			17509-MA6-620ZB STRIPE, L. FUEL TANK *TYPE-2*		1	1	
		3	77228-MA6-620ZA STRIPE, R. SEAT COWL *TYPE-1*		1	1	
			77228-MA6-620ZB STRIPE, R. SEAT COWL *TYPE-2*		1	1	
		4	77229-MA6-620ZA STRIPE, L. SEAT COWL *TYPE-1*		1	1	
			77229-MA6-620ZB STRIPE, L. SEAT COWL *TYPE-2*		1	1	
		5	77230-MA6-620ZA EMBLEM, SEAT COWL *TYPE-1*		1	1	
			77230-MA6-620ZB EMBLEM, SEAT COWL *TYPE-2*		1	1	

Color chart for stripe, emblem and mark

Type of stripe	Position		A	B	C
	Main color				
TYPE-1	Pearl shell white/Red		Candy pearl red	Peal shell white	Black
TYPE-2	Pearl shell white/Blue		Candy pearl blue	Peal shell white	Red

K 3


F-32

Stripe
(CBX400Fc • F2c)

Rayure
(CBX400Fc • F2c)

Streifen
(CBX400Fc • F2c)

Franja
(CBX400Fc • F2c)

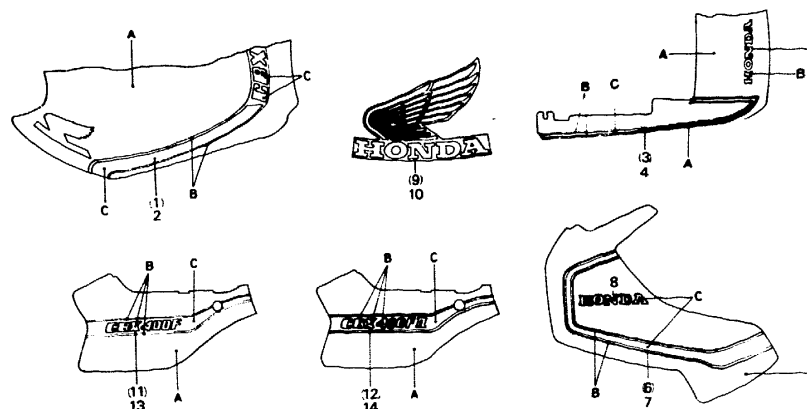

BMA6-52

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		6	87101-MA6-620ZA	STRIPE, R. FAIRING *TYPE-1*	1		
			87101-MA6-620ZB	STRIPE, R. FAIRING *TYPE-2*	1		
		7	87102-MA6-620ZA	STRIPE, L. FAIRING *TYPE-1*	1		
			87102-MA6-620ZB	STRIPE, L. FAIRING *TYPE-2*	1		
		8	87103-MA6-620ZA	EMBLEM, FAIRING SIDE *TYPE-1*	1		
			87103-MA6-620ZB	EMBLEM, FAIRING SIDE *TYPE-2*	1		
		9	87121-MA6-620ZA	MARK, R. FUEL TANK *TYPE-1*	1 1		
			87121-MA6-620ZB	MARK, R. FUEL TANK *TYPE-2*	1 1		
		10	87122-MA6-620ZA	MARK, L. FUEL TANK *TYPE-1*	1 1		
			87122-MA6-620ZB	MARK, L. FUEL TANK *TYPE-2*	1 1		

K 4


F-32

Stripe
(CBX400Fc • F2c)

Rayure
(CBX400Fc • F2c)

Streifen
(CBX400Fc • F2c)

Franja
(CBX400Fc • F2c)

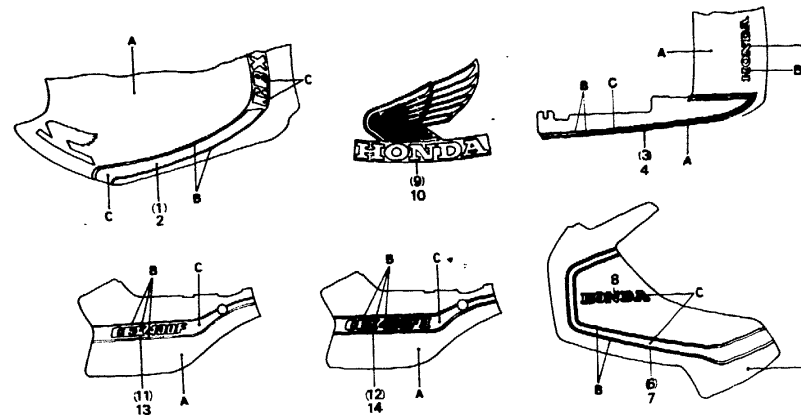

BMA6-52

Service item:	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		11	87128-MA6-620ZA	STRIPE, R. SIDE COVER *TYPE-1*	1 1		
			87128-MA6-620ZB	STRIPE, R. SIDE COVER *TYPE-2*	1 1		
		12	87128-MA6-720ZA	STRIPE, R. SIDE COVER *TYPE-1*	1		
			87128-MA6-720ZB	STRIPE, R. SIDE COVER *TYPE-2*	1		
		13	87129-MA6-620ZA	STRIPE, L. SIDE COVER *TYPE-1*	1 1		
			87129-MA6-620ZB	STRIPE, L. SIDE COVER *TYPE-2*	1 1		
		14	87129-MA6-720ZA	STRIPE, L. SIDE COVER *TYPE-1*	1		
			87129-MA6-720ZB	STRIPE, L. SIDE COVER *TYPE-2*	1		

K 5






F-32-1

Stripe
(CBX400Fc • F2c-ED)

Rayure
(CBX400Fc • F2c-ED)

Streifen
(CBX400Fc • F2c-ED)

Franja
(CBX400Fc • F2c-ED)

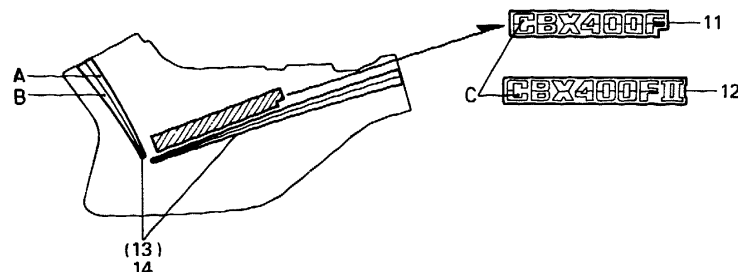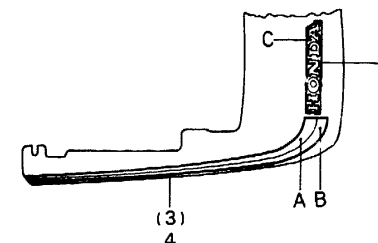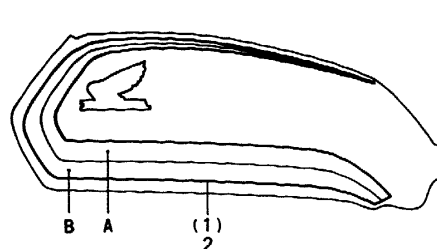

BMA6-55

DWA6-03

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		1	17508-MA6-630ZA	STRIPE, FUEL TANK R. *TYPE-1*	1 1		ED
			17508-MA6-630ZB	STRIPE, FUEL TANK R. *TYPE-2*	1 1		ED
		2	17509-MA6-630ZA	STRIPE, FUEL TANK L. *TYPE-1*	1 1		ED
			17509-MA6-630ZB	STRIPE, FUEL TANK L. *TYPE-2*	1 1		ED
		3	77228-MA6-630ZA	STRIPE, R. SEAT COWL *TYPE-1*	1 1		ED
			77228-MA6-630ZB	STRIPE, R. SEAT COWL *TYPE-2*	1 1		ED
		4	77229-MA6-630ZA	STRIPE, L. SEAT COWL *TYPE-1*	1 1		ED
			77229-MA6-630ZB	STRIPE, L. SEAT COWL *TYPE-2*	1 1		ED
		5	77230-MA6-630ZA	EMBLEM, SEAT COWL *TYPE-1*	1 1		ED
			77230-MA6-630ZB	EMBLEM, SEAT COWL *TYPE-2*	1 1		ED

Color chart for stripe, emblem and mark

Type of stripe	Position			
	Main color	A	B	C
TYPE 1	Pearl shell white	Red	Blue	Pearl shell white
TYPE 2	Monza red	Pearl shell white	Blue	Monza red

1985.02.20

E

K5

K 6


F-32-1

Stripe
(CBX400Fc • F2c-ED)

Rayure
(CBX400Fc • F2c-ED)

Streifen
(CBX400Fc • F2c-ED)

Franja
(CBX400Fc • F2c-ED)

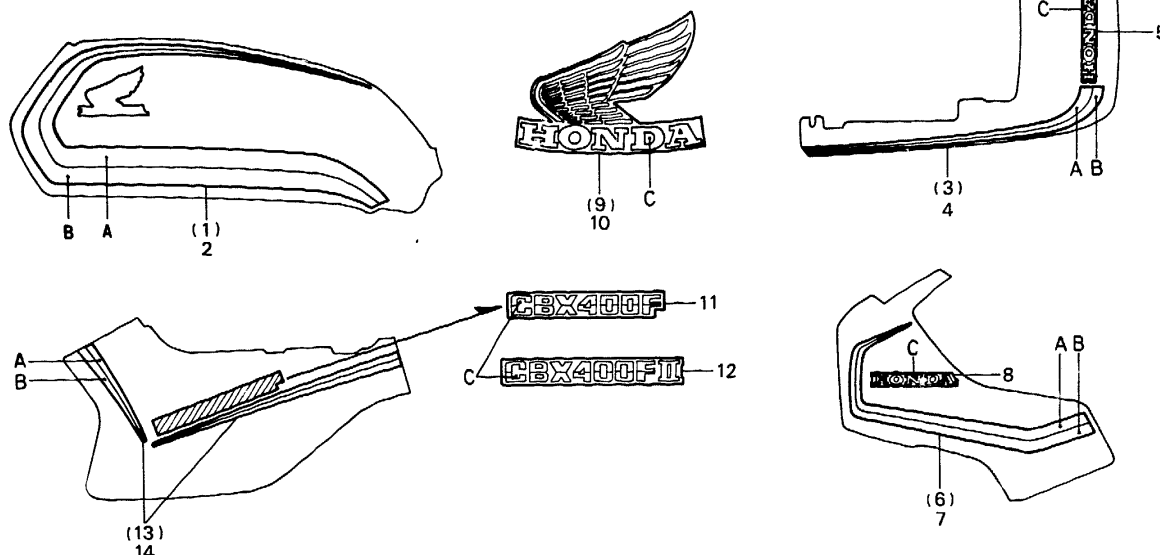

BMA6-55

Service item	F.R.T.	Ref. No.	Part No.	Description	Repl. No. CBX400 Fc F2c	Serial No.	Area code
		6	87101-MA6-730ZA	STRIPE, R. FAIRING *TYPE-1*	1		ED
			87101-MA6-730ZB	STRIPE, R. FAIRING *TYPE-2*	1		ED
		7	87102-MA6-730ZA	STRIPE, L. FAIRING *TYPE-1*	1		ED
			87102-MA6-730ZB	STRIPE, L. FAIRING *TYPE-2*	1		ED
		8	87103-MA6-730ZA	EMBLEM, FAIRING SIDE *TYPE-1*	2		ED
			87103-MA6-730ZB	EMBLEM, FAIRING SIDE *TYPE-2*	2		ED
		9	87121-MA6-630ZA	MARK, R. FUEL TANK *TYPE-1*	1	1	ED
			87121-MA6-630ZB	MARK, R. FUEL TANK *TYPE-2*	1	1	ED
		10	87122-MA6-630ZA	MARK, L. FUEL TANK *TYPE-1*	1	1	ED
			87122-MA6-630ZB	MARK, L. FUEL TANK *TYPE-2*	1	1	ED

K 7






F-32-1

Stripe
(CBX400Fc • F2c-ED)

Rayure
(CBX400Fc • F2c-ED)

Streifen
(CBX400Fc • F2c-ED)

Franja
(CBX400Fc • F2c-ED)

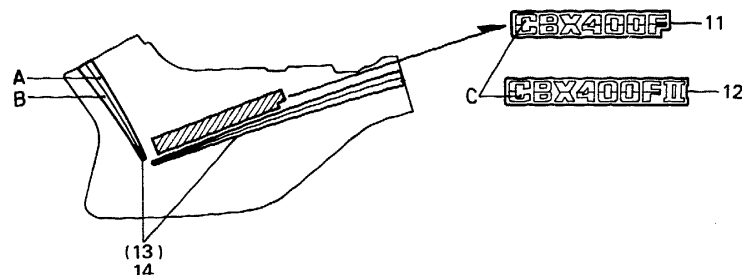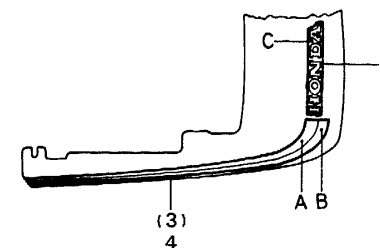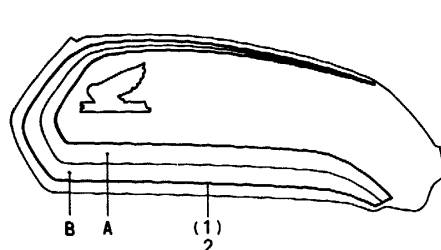

BMA6-55

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		11	87126-MA6-630ZA	EMBLEM, SIDE COVER *TYPE-1*	2		ED
			87126-MA6-630ZB	EMBLEM, SIDE COVER *TYPE-2*	2		ED
		12	87126-MA6-730ZA	EMBLEM, SIDE COVER *TYPE-3*	2		ED
			87126-MA6-730ZB	EMBLEM, SIDE COVER *TYPE-4*	2		ED
		13	87128-MA6-630ZA	STRIPE, R. SIDE COVER *TYPE-1*	1	1	ED
			87128-MA6-630ZB	STRIPE, R. SIDE COVER *TYPE-2*	1	1	ED
		14	87129-MA6-630ZA	STRIPE, L. SIDE COVER *TYPE-1*	1	1	ED
			87129-MA6-630ZB	STRIPE, L. SIDE COVER *TYPE-2*	1	1	ED

K 8


F-33

**Fairing
(CBX400F2c)**

**Profilage
(CBX400F2c)**

**Verkleidung
(CBX400F2c)**

**Carena
(CBX400F2c)**

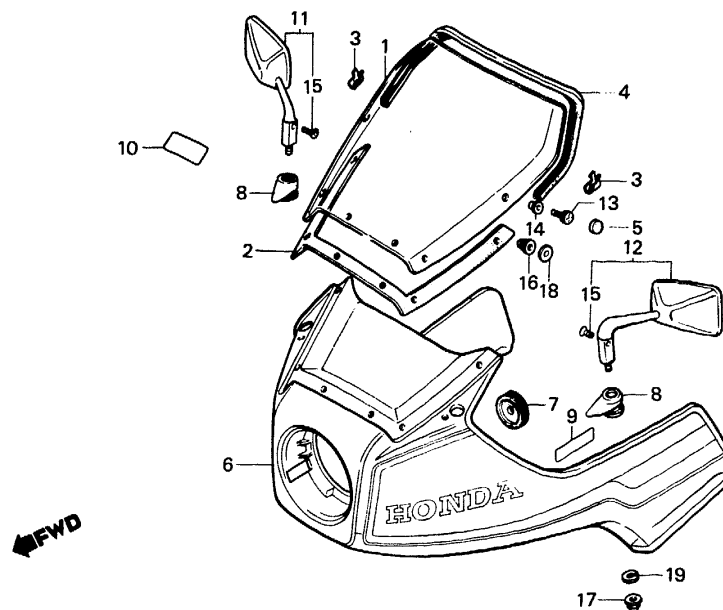

BMA6-53

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
SCREEN, WIND FAIRING COMP.	0.2	1	64100-MA6-720	SCREEN, WIND	1		
	0.4	2	64101-MA6-720	RUBBER, SCREEN BASE	1		
		3	64102-MA6-700	CLIP, SCREEN MOULDING	2		
		4	64105-MA6-720	MOULDING, WIND SCREEN	1		
		5	64109-MA2-000	CAP, SCREEN SCREW	6		
		6	64200-MA6-720ZA	FAIRING COMP. *TYPE 1* (PEARL WHITE/RED)	1		
			64200-MA6-720ZB	FAIRING COMP. *TYPE 2* (PEARL WHITE/BLUE)	1		
			64200-MA6-730ZA	FAIRING COMP. *NH-121P-A* (PEARL SHELL WHITE)	1		ED
			64200-MA6-730ZB	FAIRING COMP. *R-110, TYPE-2* (MONZA RED)	1		ED
		7	64218-MA2-000	GROMMET, HEADLIGHT CORD	1		
		8	64522-MA6-720	GROMMET, MIRROR	2		
		9	87515-MA6-720	LABEL, FAIRING MARK	1		F

K 9


F-33

**Fairing
(CBX400F2c)**

**Profilage
(CBX400F2c)**

**Verkleidung
(CBX400F2c)**

**Carena
(CBX400F2c)**

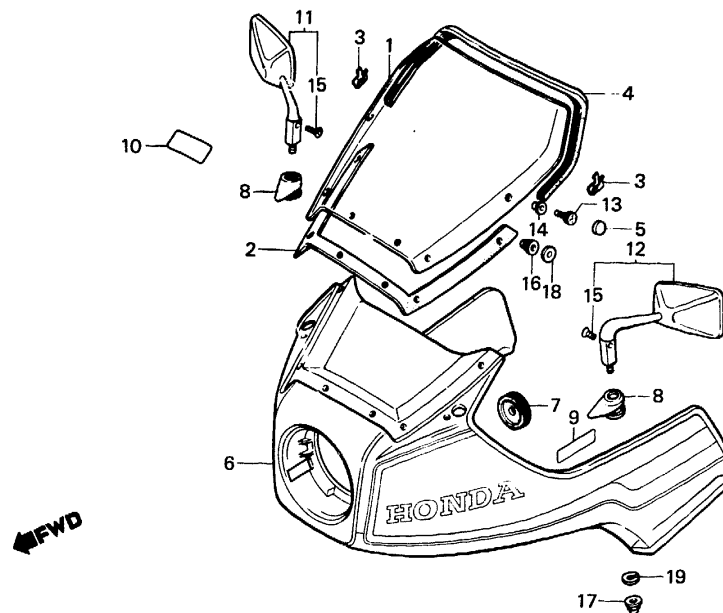

BMA6-53

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		10	87515-MA6-730	LABEL, FAIRING MARK	1		ED
			87522-463-930	LABEL, WIND SCREEN CAUTION	1		ED
			87522-463-950	LABEL, WIND SCREEN CAUTION	1		F
		11	88110-MA6-721	MIRROR, R. BACK	1		
		12	88120-MA6-721	MIRROR, L. BACK	1		
		13	90006-MA6-720	SCREW, SCREEN SETTING	6		
		14	90007-MA6-720	COLLAR, SCREEN SETTING	6		
		15	93500-05014-0G	SCREW, PAN, 5X14	2		
		16	94021-04070-0S	NUT, CAP, 4MM	6		
		17	94021-10070-0S	NUT, CAP, 10MM	2		
		18	94101-04700	WASHER, PLAIN, 4MM	6		
		19	94111-10700	WASHER, SPRING, 10MM	2		

K 10


F-34

**Fairing stay
(CBX400F2c)**

**Appui de profilage
(CBX400F2c)**

**Vrekleidungsstütze
(CBX400F2c)**

**Carena tirante
(CBX400F2c)**

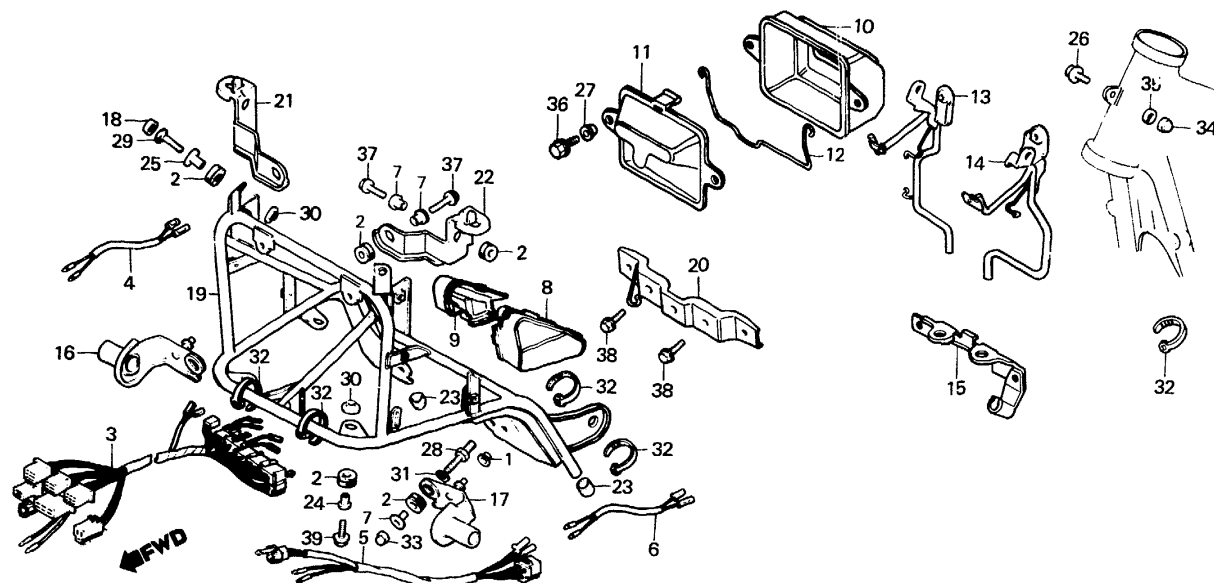

BMA6-54C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
HARNESS C, SUB WIRE	0.3	1	15605-MA6-000	GROMMET, OIL COOLER	2		
HARNESS D, SUB WIRE	0.2	2	17245-107-010	RUBBER, AIR CLEANER CASE	14		
HARNESS E, SUB WIRE				MOUNTING			
BRACKET, R. HEADLIGHT CASE		3	32103-MA6-720	HARNESS C, SUB WIRE	1	2007136	
BRACKET, L. HEADLIGHT CASE		4	32104-MA6-720	HARNESS D, SUB WIRE	1	2002862	
STAY, FAIRING (B)		5	32105-MA6-720	HARNESS E, SUB WIRE	1		
STAY, FAIRING MAIN	0.5	6	32108-MA6-720	HARNESS H, SUB	1	2007136	
STAY, R. BACK MIRROR	0.1	7	61104-MA6-720	COLLAR, FR. WINKER BRACKET	6		
STAY, L. BACK MIRROR		8	61305-MA6-720	HOLDER A, COUPLER	1	2007136	
		9	61306-MA6-720	COVER, COUPLER HOLDER (A)	1	2007136	
		10	61307-MA6-720	HOLDER B, COUPLER	1	2007136	
			61307-MA6-721	HOLDER B, COUPLER	1	2007137	

K 11


F-34

**Fairing stay
(CBX400F2c)**

**Appui de profilage
(CBX400F2c)**

**Vrekleidungsstütze
(CBX400F2c)**

**Carena tirante
(CBX400F2c)**

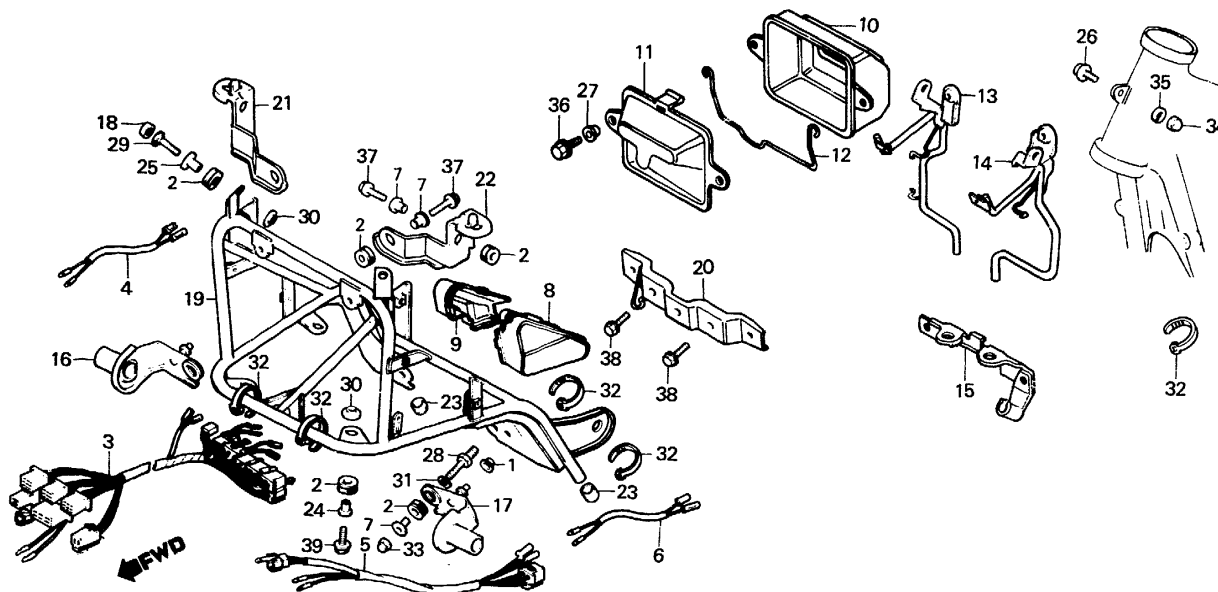

BMA6-54C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		11	61308-MA6-720	COVER, COUPLER HOLDER (B)	1	2005155	
			61308-MA6-721	COVER, COUPLER HOLDER (B)	1	2005156	2007136
			61308-MA6-722	COVER, COUPLER HOLDER (B)	1	2007137	
		12	61309-MA6-720	GUIDE, SUB WIRE HARNESS	1		2007136
			61309-MA6-721	GUIDE, SUB WIRE HARNESS	1	2007137	
		13	61311-MA6-720	BRACKET, R. HEADLIGHT CASE	1		
		14	61312-MA6-720	BRACKET, L. HEADLIGHT CASE	1		
		15	61315-MA6-720	STAY, FR.	1		
		16	61316-MA6-720	BRACKET, R. FR. WINKER	1		
		17	61317-MA6-720	BRACKET, L. FR. WINKER	1		
		18	64279-MA2-000	CAP, LEG SHIELD SCREW	2		
		19	64501-MA6-720	STAY, FAIRING MAIN	1		
		20	64503-MA6-720	STAY, FAIRING (B)	1		

K 12


F-34

**Fairing stay
(CBX400F2c)**

**Appui de profilage
(CBX400F2c)**

**Vrekleidungsstütze
(CBX400F2c)**

**Carena tirante
(CBX400F2c)**

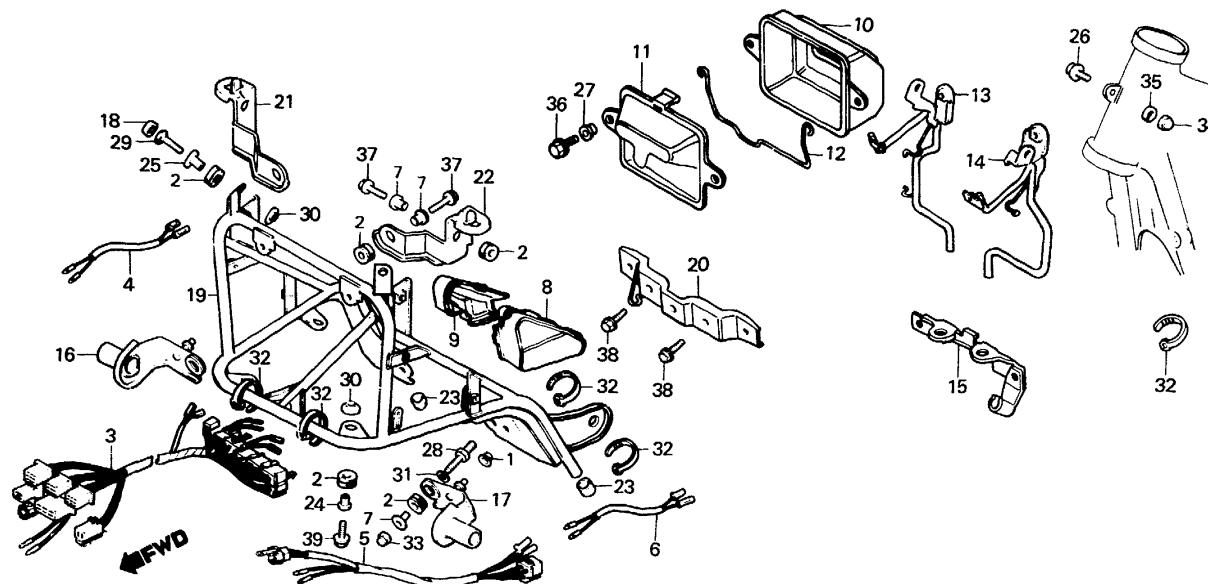

BMA6-54C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		21	64511-MA6-720	STAY, R. BACK MIRROR	1	2007136	
			64511-MA6-770	STAY, R. BACK MIRROR	1	2007137	
		22	64512-MA6-720	STAY, L. BACK MIRROR	1	2007136	
			64512-MA6-770	STAY, L. BACK MIRROR	1	2007137	
		23	64513-MA6-720	PLUG, FAIRING	2		
		24	64531-MA6-720	COLLAR, FAIRING SETTING	6		
		25	64532-MA6-720	COLLAR, FAIRING SETTING	2		
		26	90112-MA6-700	BOLT, FLANGE, 8X16	1	2007136	
		27	90129-MA1-740	COLLAR, REFLECTOR SETTING	2	2007137	
			91551-723-650	COLLAR, DISTANCE	2		
		28	90160-MA6-720	BOLT, FAIRING SETTING	2		
		29	90161-MA6-720	SCREW, FAIRING SETTING	2		
		30	90400-438-850	WASHER, 6X22	8		
		31	90506-500-000	WASHER, AIR DUCT	2		
		32	90650-MA6-720	BAND, WIRE HARNESS	5		

K 13


F-34

**Fairing stay
(CBX400F2c)**

**Appui de profilage
(CBX400F2c)**

**Vrekleidungsstütze
(CBX400F2c)**

**Carena tirante
(CBX400F2c)**

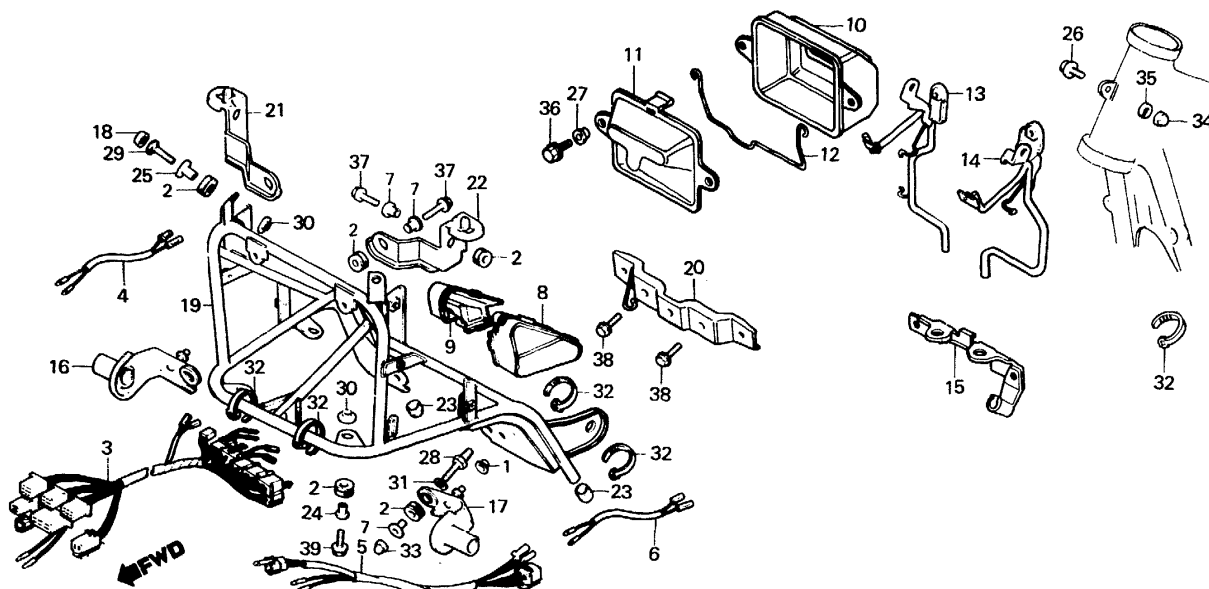

BMA6-54C

Service item	F.R.T.	Ref. No.	Part No.	Description	Reqd. No. CBX400 Fc F2c	Serial No.	Area code
		33	94021-06270-0S	NUT, CAP, 6MM	2		
		34	94021-08270-0S	NUT, CAP, 8MM	1		
		35	94111-08700	WASHER, SPRING, 8MM	1		
		36	95700-06016-07	BOLT, FLANGE, 6X16	2		
		37	95700-06022-07	BOLT, FLANGE, 6X22	4		
		38	95700-08014-07	BOLT, FLANGE, 8X14	2		
		39	96000-06028-07	BOLT, FLANGE, 6X28	6		